SCHEDULE 1


Regulation 11(1) and (5)

WARNING SIGNS

(other than those for railway and tramway level crossings, bus and pedal cycle facilities, and road works)

SCHEDULE 1 WARNING SIGNS (other than those for railway and tramway level crossings, bus and pedal cycle facilities, and road works)

Regulation 11(1) and (5)






501 Junction ahead controlled by a diagram 601.1 ("STOP") or diagram 602 ("GIVE WAY") sign

ltem	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 502, 503, 608
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1


502 Distance to a junction ahead controlled by a diagram 601.1 ("STOP") sign

item	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 501
4	Permitted variants: Schedule 16, item 6
5	Illumination requirements: Schedule 17, item 8



503 Distance to a junction ahead controlled by a diagram 602 ("GIVE WAY") sign


ltern	
ţ	Regulations: None
2	Directions: 18, 19
3	Diagrams: 501
4	Permitted variants: Scheduls 16, item 6
5	Illumination requirements: Schedule 17, item 8



504.1 Crossroads ahead


ltem	
1	Regulations: None
2	Directions: 19
3	Diagrame: 511, 572
4	Permitted variants: Schedule 16, item 17
5	Illumination requirements: Schedule 17, itam 1

SCHEDULE 1 WARNING SIGNS (contd.)




505.1 T-junction ahead

item	
1	Regulations: None
2	Directions: 19
3.	Diegrams: 511, 572
4	Permitted variants: Schedule 16, item 28
5	Nurnination requirements: Schedule 17, item 1




506.1 Side road ahead

liem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 511, 572, 7301, 7302
4	Permitted variants: Schedule 16, items 17, 28
5	Illumination requirements: Schedule 17, item 1



507.1 Staggered junction ahead

item	
4	Regulations: None
2	Directions: 19
3	Diagrams: 511, 572
4	Permitted variants: Schedule 16, items 17, 28
õ	Illumination requirements: Schedule 17, item 1



510 Roundabout ahead


ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 511
4	Permitted variants: None
5	Illumination requirements: Schedule 17. item 1

SCHEDULE 1 WARNING SIGNS (contd.)




511 Reduction in speed necessary for a change in road layout ahead

ltern	
1	Regulations: None
2	Directions: 19
3	Diagrams: 504.1, 505.1, 506.1, 507.1, 510, 512, 512.1, 512.2, 513, 516, 517, 520, 523.1, 524.1, 528, 556
4	Permitted variants: "REDUCE SPEED NOW" may be varied to "HEAVY PLANT CROSSING" when used in combination with any of the signs in diagrams 504.1, 505.1, 506.1, 507.1, 512.1, 512.2
5	Illumination requirements: Schedule 17, item 8




512 Bend ahead

ltern	
1	Regulations: None
2	Directions: 19
3	Diagrams: 511, 513.1, 513.2, 526
4	Permitted variants: Schedule 16, item 28
8	Illumination requirements: Schedule 17, item 1



512.1 Junction on bend ahead


ltem	
*	Regulations: None
2	Directions: 19
з	Diagrams: 511, 513.1, 513.2, 526
4	Permitted variants: Schedule 16, item 28
5	IllumInation requirements: Schedule 17, item 1



512.2 Same as diagram 512.1

ttem	
1	Regulations: None
2.	Directions: 19
3	Diagrams: 511, 513.1, 513.2, 526
4	Permitted variants: Schedule 16, item 28
5	Illumination requirements: Schedule 17, item 1

SCHEDULE 1 WARNING SIGNS (contd.)



513 Double bend ahead, first to the left

item	
1	Regulations: None
2	Directions: 19
3	Diagrams: 511, 513.1, 513.2, 526, 570
4	Permitted variants: Schedule 16, item 28
5	Illumination requirements: Schedule 17, item 1



513.1 Adverse camber on a bend

ltem	
ł	Regulations: None
2	Directiona: 19
3	Diagrams: 512, 512.1, 512.2, 513
4	Permitted variants: None
5	Illumination requirements; Schedule 17, item 8

200



(300) (400) (400) (400) (1200) (1200) (4


513.2 Advisory speed limit at a bend or other hazard

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 512, 512.1, 512.2, 513, 7009
4	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, Item 8


515 Sharp deviation of route

ltem	
1	Regulations: None
2	Directions: None
3	Diagrame: 515.2, 606
4	Permitted variants: Schedule 16, item 13 Number of chevrons may be varied
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 1 WARNING SIGNS (contd.)

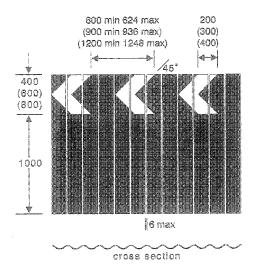


515.1 Same as diegram 515

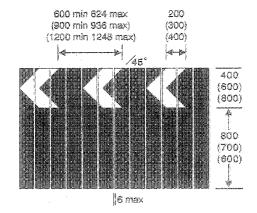


cross section


515.1A Sharp deviation of route at a roundabout

item	
1	Regulations: 11(2)
2	Directions: None
3	Diagrams: None
4	Permitted variants: Scheciule 18, items 13, 42 same as diagram 515
5	Illumination requirements: Schedule 17, item 4



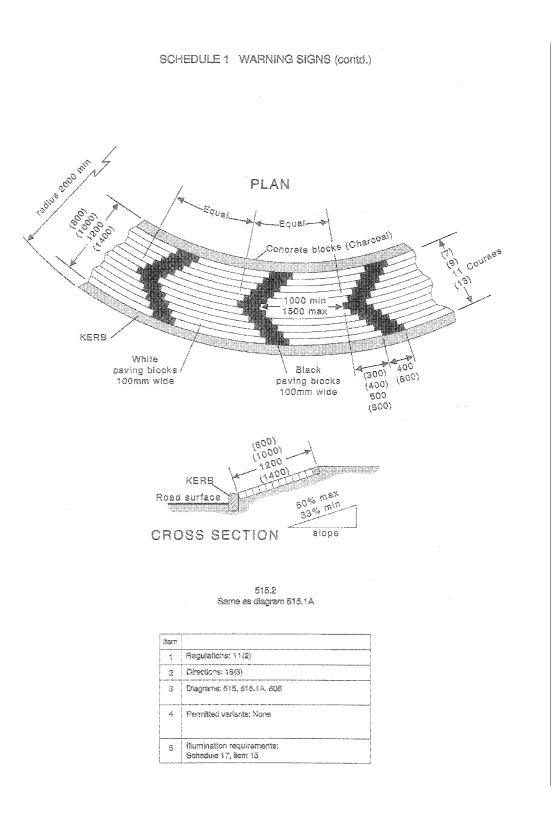


SCHEDULE 1 WARNING SIGNS (contd.)



516 Road narrows on both sides ahead

item	
1	Regulations: None
2	Directions: 19
3	Diagrams: 511, 518, 519, 570, 572, 573, 575
4	Permitted variants: None
5	illumination requirements: Schedule 17, item 1



517 Road narrows on right ahead

item	
1	Regulations: None
2	Directions: 19
3	Diegrams: 511, 518, 519, 570, 572, 573, 575
4	Permitted variants: Schedule 16, item 28
5	Illumination requirements: Schedule 17, item 1



518 Convergence of traffic to a single file in each direction

ltem	·
1	Regulations: None
2	Directions: 19
3	Diagrams: 516, 517, 620, 570
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 6

519 Road only wide enough for one line of vehicles

Single track


road

(<u>50</u> (62.5)

(75) (100)


tem	
ş	Regulations: None
2	Directions: 19
3	Diagrams: 516, 517, 570
4	Permitted variants: None
5	Illumination requirements:
	Schedule 17, item 8

SCHEDULE 1 WARNING SIGNS (contd.)




520 Dual carriageway ends ahead

ltern	
1	Regulations: None
2	Directions: 19
3	Diagrams: 311, 518, 572
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1




521 Two-way traffic

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 570, 572
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1



522 Two-way traffic on route crossing ahead


ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 572
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1



523.1 Steep hill downwards ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 511, 525, 526, 627, 570, 572, 573, 817.2
4	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, item 1

SCHEDULE 1 WARNING SIGNS (contd.)



524.1 Steep hill upwards ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 511, 525, 526, 527, 570, 572, 573
4	Permitted variants: Schedule 15, item 1
õ	Illumination requirements: Schedule 17, item 1



525 Drivers should engage low gear for steep hill

Rem	
4	Regulations: None
Ż	Directions: 19
3	Diagrams: 523.1, 524.1
4	Permitted variants: None
5	Illumination requirements: Schedule 17, Item 8



526

Drivers should keep in low gear for steep hill or tight bend

item	
1	Regulations: None
2	Directions: 19
3	Diagrams: 512, 512.1, 512.2, 513, 523.1, 524.1, 554.1
å	Permitted variants: None
õ	Illumination requirements: Schedule 17, item 8

527 Drivers should keep in low gear for distance indicated

Low gear

for

50

62.5

(75) (100)

(125) (150)

Item

 1
 Regulations: None


 2
 Directions: 19

 3
 Diagrams: 523.1, 524.1

 4
 Permitted variants: Schedule 16, item 5


 5
 Illumination requiremente: Schedule 17, item 8

SCHEDULE 1 WARNING SIGNS (contd.)




528 Hump bridge ahead

item	
1	Regulations: None
2	Directions: 19
3	Diagrams: 511, 572, 573, 575, 782
Ą	Permitted variants: None
5	lilumination requirements: Schedule 17, Item 1




529 Opening or swing bridge ahead

item	
1	Regulations: None
2	Directions: 19
3	Diagrams: 572, 573, 773
4	Permitted variants: None
5	Blumination requirements: Schedule 17, item 1

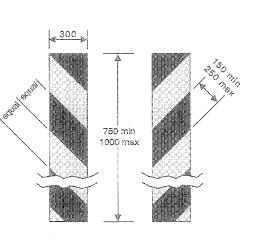

528.1 End of bridge parapet, abutment wall, tunnel mouth, or other obstruction adjacent to the carriageway

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	illumination requirements: Schedule 17, Item 4 The parts of the sign coloured yellow may be fluorescent as well as retroreflective



529.1 Tunnel ahead

Item

 Item

 1
 Regulations: None


 2
 Directions: 19

 3
 Diagrams: 572, 573, 675, 773

 4
 Permitted variants: None

 5
 Illumination requirements: Schedule 17, item 1

SCHEDULE 1 WARNING SIGNS (contd.)

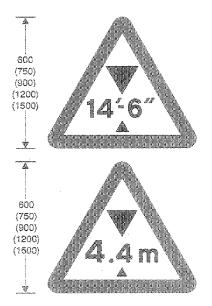

530 Maximum headroom available at hazard


ltern	
ï	Regulations: None
2	Directions: 19
3	Diagrams: 530.1, 530.2, 572, 573
4	Permitted variants: Schedule 16, item 1 Metric sign may be omitted or placed to the right of the imperial sign
ō	Illumination requirements: Schedule 17, item 1



530.1 Reduced headroom over part of road due to overhanging building ahead

itam	
ŝ	Regulations: None
2	Directions: 19
3	Diagrams: 530
4	Permitted variants: None
5	litumination requirements: Schedule 17, item 8


SCHEDULE 1 WARNING SIGNS (contd.)

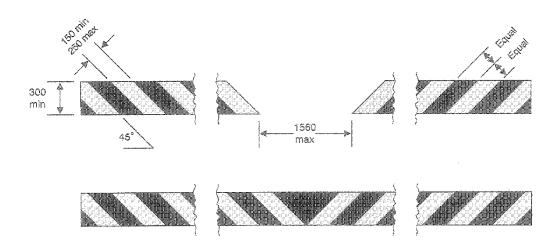

530.2 Reduced headroom at a hazard (Alternative types)


ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 530, 629.2, 629.2A
4	Permitted variants: None
5	illumination requirements: Schedule 17, item 9 Where those parts of the sign coloured yellow are retroreflective they may also be fluorescent

SCHEDULE 1 WARNING SIGNS (contd.)

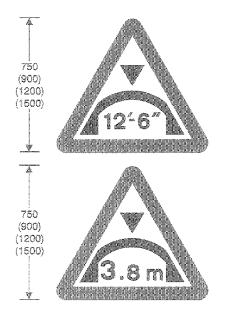

531.1 Maximum headroom available at arch bridge ahead


ltern	
1	Regulations: None
2	Directions: 19
3	Diagrams: 631.2, 572, 573
4	Permitted variants: Schedule 16, item 1 Metric sign may be omitted
5	illumination requirements: Schedule 17, item 1



531.2 High vehicles to use the middle of road at arch bridge shead

item	
1	Regulations: None
2	Directions: 19
3	Diagrams: 531.1
4	Permitted variants: None
5	Illumination regulrements: Schedule 17, item 6



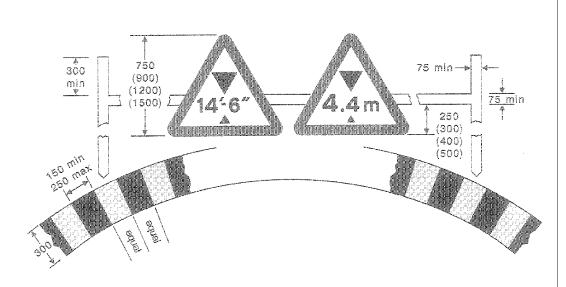

532.2 Maximum headroom available in the centre of a road at an arch bridge

 Item

 1
 Regulations: None

 2
 Directions: None

 3
 Diagrams: None

 4
 Permitted variants: Schedule 16, item 1


 Black and yellow markings may be omitted.


 Metric sign may be omitted

 5
 Illumination requirements: Schedule 17, items 1, 9


 Same as diagram 550.2

SCHEDULE 1 WARNING SIGNS (contd.)

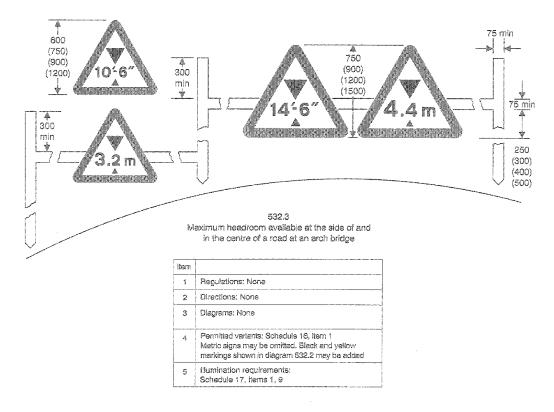




543 Traffic signals ahead






543.1 Traffic signals ahead which only operate at certain times




SCHEDULE 1 WARNING SIGNS (contd.)




544 Pedestrian crossing ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 547.5, 572, 573
4	Permitted variants: None
5	illumination requirements: Schedule 17, items 1, 5




544.1 Pedestrians in road ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diegrams: 547.3, 572, 573
4	Permitted variants: None
5	lilumination requirements: Schedule 17, item 1



544.2 Elderly or disabled pedestrians likely to cross road ahead

ltem	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 547.4, 572, 573
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1



545 Children going to or from school or playground shead

ltem	
1	Regulations: None
2	Directions: 18(2), 19, 25, 48(1)
3	Diagrams: 546, 547.1, 547.2, 547.3, 547.7, 572, 573, 4064
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1

SCHEDULE 1 WARNING SIGNS (contd.)







548 School ahead

item	
î	Regulations: None
2	Directions: 18(2), 19, 25, 48(1)
3	Diagrams: 545, 4004
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8

547.1 School crossing patrol ahead

item	
4	Regulations: None
2	Directions: 18(2), 19, 25, 48(1)
3	Diagrams: 545, 4004
4	Permitted variants: None
5	lilumination requirements: Schedule 17, item 8







547.2 Children's playground ahead

item	
1	Regulations: None
2	Directions: 18(2), 19
3	Diagrams: 545
4	Permitted variants: None
6	Illumination requirements: Schedule 17, Item 8

547.3 No footway for distance indicated

liem	
1	Regulations: None
2	Directions: 18(2), 19
3	Diagrams: 544.1, 545
4	Permitted variants: Schedule 16, item 6
5	illumination requirements: Schedule 17, ilem 8

SCHEDULE 1 WARNING SIGNS (contd.)





547.4 Elderly pedestrians likely to cross road ahead

ltem	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 544.2
4	Permitted variants: "Elderly" may be varied to "Blind" or "Disabled"
ō	lilumination requirements: Schedule 17, item 8

547.5 Zebra pedestrian crossing on road hump ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 544
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



547.6 Pelicari pedestrian crossing on road hump ahead


ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 543
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



547.7 Disabled children likely to cross road ahead

(tem	
1	Regulations: None
2	Directions: 18(2), 19
3	Diagrams: 545
4	Permitted variants: "Disabled" may be varied to "Blind" or "Deaf"
5	Iliumination requirements: Schedule 17, item 6

SCHEDULE 1 WARNING SIGNS (contd.)




548 Cattle likely to be in road ahead

item	
1	Regulations: None
2	Directions: 19, 48(2)
3	Diagrams: 548.1, 570, 4005
4	Permitted verlants: None
5	litumination requirements: Scinedule 17, item 4




548.1 Supervised cattle crossing ahead

liem	
Ť	Regulations: None
2	Directions: 19, 48(2)
3	Diagrams: 548
4	Permitted variants: Schedule 16, item 6
5	Bumination requirements: Schedule 17, item 8



549 Sheep likely to be in road ahead


item	
4	Regulations: None
2	Directions: 19
З	Diagrams: 570
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



560 Wild horses or ponies likely to be in road ahead


ltern	
1	Regulations: None
2	Directions: 19
3	Diagrams: 670
4	Permitted variants: None
5	Illumination requirements: Schadule 17, item 4
	SUNBLUE 17, REFI 4

SCHEDULE 1 WARNING SIGNS (contd.)




550.1 Accompanied horses or ponies likely to be in road ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 570
4	Permittad variants: None
5	filumination requirements: Schedule 17, item 4




551 Wild animals likely to be in road ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 370
4	Permitted variants: None
5	liumination requirements: Schedule 17, item 4



551.1 Migratory toad crossing ahead

ltem	
1	Regulations: None
2	Directions: 19, 26
3	Diagrams: 570
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



551.2 Wild fowl likely to be in road ahead

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: 570
4	Permitted variants: None
5	lilumination requirements: Schedule 17, item 4

50


50

(75)

(100)


Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE 1 WARNING SIGNS (contd.)




552 Cattle grid ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 558, 572, 573
4	Permitted variants: None
5	Illumination requirements: Schedule 17, itsm 4




553 By-pass of cattle grid

item	
Ť	Regulations: None
2	Diractions: 19
3	Diagrams: 552
4	Permitted variants: Schedule 16, item 13
5	illumination raculrements: Schedule 17, item 8



553.1 Agricultural vehicles likely to be in road ahead


Item	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 553.2, 570
4	Permitted variants: None
5	Illumination requirements: Schedule 17, liem 4



553.2 Agricultural vehicles likely to be in road shead


ltem	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 553.1
4	Permitted variants: "Farm traffic" may be varied to "Wide vehicles" or "Tractors turning"
5	Illumination requirements: Schedule 17, item 8

SCHEDULE 1 WARNING SIGNS (contd.)




554 Worded warning sign

ltern	
1	Regulations: None
2	Directions: 19, 34(3)
3	Diagrams: 572, 573
4	Permitted variants: "Ford" may be varied to "Flood", "Gate", or "No smoking"
5	lilumination requirements: Schedule 17, item 4



554.1 Risk of brake failure after crossing a ford or before descending a steep gradient

ltem	
١	Regulations: None
2	Directions: 19
3	Diagrams: 526, 817.2
4	Permitted variants: None
÷	Illumination requirements: Schedule 17, item 4



554.2 Risk of ice or packed snow ahead


ltem	
1	Regulations: None
2	Diractions: 18, 19, 34(3)
3	Diagrams: 354.3, 570
4	Permitted variants: None
5	illumination requirements: Schedule 17, item 4



554.3 Ice ahead


ltem	
1	Regulations: None
2	Diractions: 18, 19, 34(3)
3	Diagrams: 554.2, 622.1A, 622.4, 629, 629.1, 632
4	Permitted variants: "Ice" may be varied to "Snowdrifts"
5	Illumination requirements: Schedule 17, item 8

SCHEDULE 1 WARNING SIGNS (contd.)




555 Quayside or river bank ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 572, 573
4	Permitted variants: None
5	Illumination requirements: Schedule 17, Item 1




556 Uneven road ahead

ltam	
ì	Regulations: None
2	Diractions: 19
3	Diagrams: 511, 570
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4




556.1 Soft verges ahead


ltem	
1	Regulations: None
2	Directione: 18, 19
3	Diagrams; 556.2, 570
4	Permitted variants: None
5	illumination requirements: Schedule 17, item 4



556.2 Soft verges for distance indicated

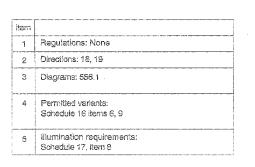


SCHEDULE 1 WARNING SIGNS (contd.)




557 Slippery road ahead

ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 570
4	Parmitted variants: None
5	Illumination requirements: Schedule 17, item 4



557.1 Road hump or series of road humps ahead

item	
1	Regulations: None
2	Directions: 15, 16, 18, 19
3	Diagrams: 557.2, 557.3, 557.4, 1080, 1080.1, 1061, 1081.1
4	Permitted variants: None
5	illumination requirements: Schedule 17, item 5





557.2 Road humps ahead for the distance indicated

ltem	
1	Regulations: None
2	Directions: 18, 19
3	Diegrams: 557.1
4	Permitted variants: Schedule 16, Item 6
5	Illumination requirements: Schedule 17, item 8

557.3 Road humps ahead in the direction and for the distance indicated

ftem	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 557.1
Ą	Permitted variants: Schedule 16, items 6, 13
5	Illumination requirements: Schedule 17, item 8


SCHEDULE 1 WARNING SIGNS (contd.)



50 (62.5) (75) (100) (125)


557.4 Road hump in the direction and at the distance indicated

ltem	
1	Regulations: None
2	Directions: 18, 19
3	Diegrame: 557.1
â	Permitted variants: Schedule 16, items 6, 13, 14
5	Numination requirements: Schedule 17, item 6




558 Low flying aircraft or sudden aircraft noise likely ahead

ltam	
¥.	Regulations: None
2	Directions: 19
3	Diagrams: 558.2, 570, 773
4	Permitted variants: None
5	litumination requirements: Schedule 17, item 4



558.1 Low flying helicopters or sudden helicopter noise likely ahead


tem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 570
4	Permitted variants: None
3	i Burnination requirements: Schedule 17, item 4



Gliders likely ahead


ltem	
۲	Regulations: None
2	Directions: 19
3	Diagrams: 558
4	Permitted variants: None
5	Rumination requirements: Schedula 17, item 8

SCHEDULE 1 WARNING SIGNS (contd.)




559 Flisk of failing or failen rocks aheed

item	
· 1	Regulations: None
2	Directions: 19
3	Diagrams: 570
4	Permitted variants: Schedule 16, item 28
5	Illumination requirements: Schedule 17, item 4



560 Edge of carriageway or obstruction near that edge


ltem	
1	Regulations: 21, 44(2)
2	Directions: 39
3	Diagrams: None
4	Pemiltied variants: The portion of the sign coloured rad may be varied to while or amber
5	Illumination requirements: Schedule 17, Item 13




45 square centimetres

561 Alternative shape for the sign shown In diagram 560


item	
1	Regulations: 21, 44(2)
2	Directions: 39
3	Diagrams: None
4	Permitted variants: Same as diagram 580 The surface of the sign may be curved
5	Illumination requirements: Schedule 17, Item 13




Other danger ahead




SCHEDULE 1 WARNING SIGNS (contd.)

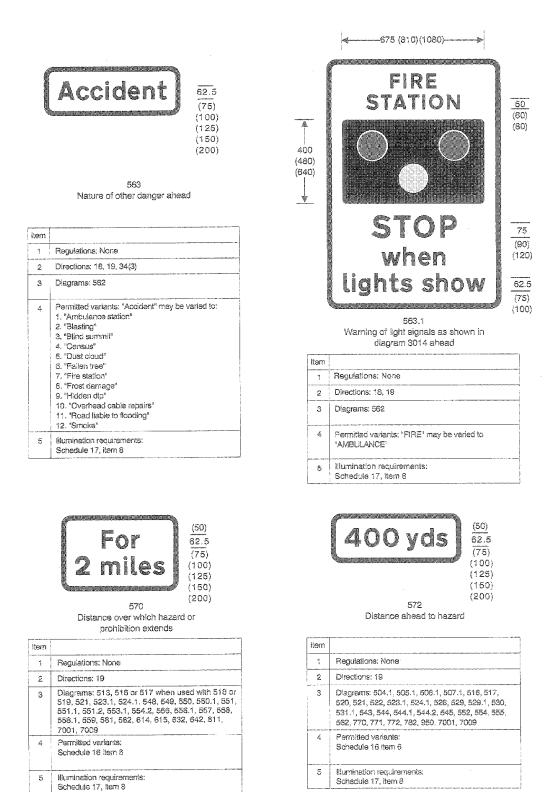

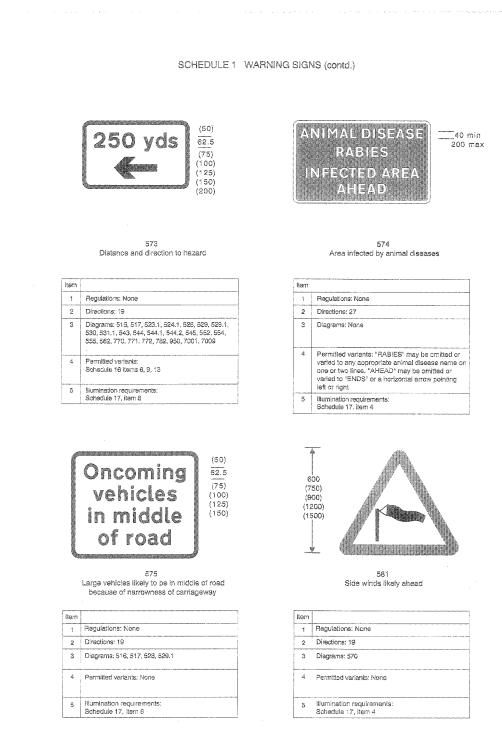


67

SCHEDULE 1 WARNING SIGNS (contd.)



582 Slow moving military vehicles likely to be crossing or in road ahead

item	
î	Regulations: None
2	Directions: 19
8	Diagrams: 570
4.	Permitted variants: None
Ŋ	Illumination requirements: Schedula 17, item 4



583 Slow moving vehicles likely on incline ahead

ltem	
ï	Regulations: None
2	Directions: 18, 19
3	Diagrams: 583.1
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



583.1 Distance over which slow moving vehicles likely to be encountered ahead

item	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 583
4	Permitted variants: Schedule 16 item 5
6	illumination requirements: Schedule 17, item 8

SCHEDULE 2

Regulation 11(1)


REGULATORY SIGNS

(other than those for railway and tramway level crossings, bus and pedal cycle facilities, and road works)

SCHEDULE 2

Regulation 11(1)

REGULATORY SIGNS (other than those for railway and tramway level crossings, bus and pedal cycle facilities, and road works)




801.1 Vehicular traffic must comply with the requirements prescribed in regulation 16

ltem	
1	Regulations: 4, 10(1), 10(2), 16
2	Directions: 6, 15, 16, 18, 19
3	Disgrams: 608, 1002.1, 1022
4	Permitted variants: None
5	Illumination requirements: Schedule 17, Item 1




805.2 Vehicular traffic must comply with the requirements of section 28 of the 1984 Act when the sign le exhibited by a school crossing patrol

liem	
1	Regulations: 19(4), S9(1)
2	Directions: 36
3	Diagrams: None
4	Permitted variants: None
6	Illumination requirements: Schedule 17. item 15



602 Vehicular traffic must comply with the requirements prescribed in regulation 16


ltem	
1	Regulations: 4, 10(1), 16, 25(2), 25(3)
2	Directions: 15, 18, 19
3	Diagrams: 608, 611.1, 774, 773, 778.1, 1003, 1003.4, 1023
-\$	Permitted variants: None
5	liumination requirements: Schedule 17, item 1




608 Vehicular traffic must proceed in the direction Indicated by the arrow

item	
1	Regulations: 10(1), 12(7), 37(2), 42
2	Directions: 7, 18(3), 19
3	Diagrams: 515, 615.1A, 516.2, 807, 908, 954.954.1, 954.2, 954.3, 954.4
4	Permitted variants: Schedule 16, item 13
5	illumination requirements: Schedula 17, items 1, 6, 7

SCHEDULE 2 REGULATORY SIGNS (contd.)








ltem	
1	Regulations: 12(7)
2	Directions: 7, 19
3	Diagrams: 606, 609
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



ltem	
۲	Regulations: None
2	Directions: 7, 19
3	Diagrams: 501, 601.1, 602, 606, 609, 610
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



603 Vehicular traffic must turn ahead in the direction indicated by the arrow

ltem	
1	Regulations: 12(7), 42
2	Directions: 7, 19
3	Diagrams: 607, 608, 954, 954.1, 954.2, 954.3, 954.4
4	Permitted variants: Schedule 16, item 28
5	Illumination requirements: Schedule 17, item 1




(270)


(450)

Vehicular traffic must comply with the requirements of regulation 15

ltem	
1	Regulations: 10(1), 12(7), 14, 15, 26(4), 42
2	Directions: 19
3	Diagrams: 608
4	Permitted variants: Arrow may point downwards to the right
5	Iliumination requirements: Schedule 17, items 1, 7


SCHEDULE 2 REGULATORY SIGNS (contd.)





611 Vehicular traffic may reach the same destination by proceeding either side of the sign

ltem	
1	Regulations: 12(7)
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 7



612 No right turn for vehicular traffic

ltem	
1	Regulations: 12(7), 37(2)
2	Directions: 7, 19
3	Diagrams: 954, 954.1, 954.2, 954.3. 954.4
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 6




Vehicular traffic entering the junction must give priority to vehicles from the right at the transverse road marking shown in diagram 1003.3 associated with the sign

(or, if the line is not for the time being visible, at the road junction) and proceed past the marking shown in

diagram 1003.4 in the direction indicated by the arrows


ltem	
1	Regulations: 10(1),12(7)
2	Directions: 15, 16
3	Diagrams: 602, 1003, 1003.3, 1003.4, 1023
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1



613 No left turn for vehicular traffic

ltem	
1	Regulations: 12(7), 37(2)
2	Directions: 7, 19
3	Diagrams: 954, 954.1, 954.2, 954.3, 954.4
4	Permitted variants: None
5	Illumination requirements: Schedule 17. items 1. 6

SCHEDULE 2 REGULATORY SIGNS (contd.)




614 No U-turns for vehicular traffic

ltem	
1	Regulations: 10(1), 12(7)
2	Directions: 7, 10, 19
3	Diagrams: 570, 645
4	Permitted variants: None
\$	liumination requirements: Schedule 17, fiems 1, 6




615.1 Same as diagram 615

ltem	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 515
ß	Permitted variants: None
5	litumination requirements: Schedula 17, item 6



615 Priority must be given to vehicles from the opposite direction


ltem	
1	Regulations: None
2	Directions: 17, 18, 19
3	Diagrams: 570, 615.1, 645, 811, 1003, 1043, 1044
4	Permitted variants: None
6	Illumination requirements: Schedule 17, item 1



No entry for vehicular traffic

ltem	
1	Regulations: 10(1), 10(2), 12(7), 37(2), 42
2	Directions: 7, 8, 19
3	Diagrams: 954, 954.1, 954.2, 1048
Ą	Permitted variants: None
5	Illumination requirements: Schedule 17. items 1, 7

SCHEDULE 2 REGULATORY SIGNS (contd.)




617 All vehicles prohibited except non-mechanically propelled vehicles being pushed by pedestrians

hem	
1	Regulations: None
2	Directions: 7, 8, 18, 19
3	Diagrams: 618, 618.1
4	Permitted variants: None
5	litumination requirements: Schedule 17, items 1, 9



618 All vehicles prohibited from "Play Street" during the times indicated except for access


ltem	
1	Regulations: None
2	Directions: 7, 3, 18, 19
3	Diagrams: 617, 1046
4,	Permitted variants: Schedule 16, item 37
5	illumination requirements: Schedule 17, itam 8




618.1 All vehicles prohibited during the times indicated except for access

item	
1	Regulations: 22
2	Directions: 7, 8, 18, 19
3	Diagrams: 617
4	Permitted variants: Schedule 16, item 37 The reference to times may be omitted. "except for access" may be omitted; "for access" may be varied to: 1, "for loading" 2. "for loading by" with the goods vehicle symbol shown in diagram 618.2 3. "permit holders" 4, the orange badge symbol shown in diagram 661 5. "buses" 6. "local buses" 7. "buses and coaches" 8. "taxis" 9. "access to off-street premises" These variants may be used in combination with each other and with "except for access", except that 1 and 2 shall not be used together or with "except for access", S shall not be used together. The word "and" shall be inserted before the last variant where more than one is used.
5	Illumination requirements: Schedule 17, item 8

SCHEDULE 2 REGULATORY SIGNS (contd.)

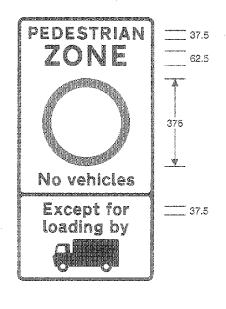

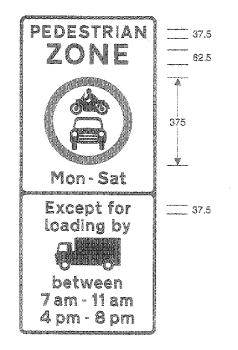



618.2 Entry to pedestrian zone restricted (Alternative types)

.....

item	
1	Regulations: 22
2	Directions: 7, 8, 22(2)
8	Diagrams: 618.4, 637.2
4	Permitted variants: Schedule 16, items 37, 38 "loading by" with the goods vehicle symbol may be varied to: 1. "local buses" 2. "buses" 3. the orange badge symbol shown in diagram 661 These variants may be used in any combination with each other and with "Except for loading by" with the goods vehicle symbol except that 1 and 2 shall not be used together. The word "and" shall be inserted before the last variant where more than one is used.
5	Illumination requirements: Schedule 17, Item 1

SCHEDULE 2 REGULATORY SIGNS (contd.)

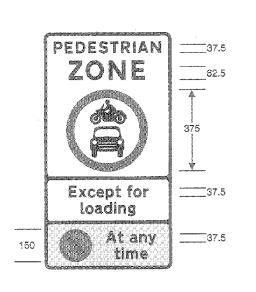


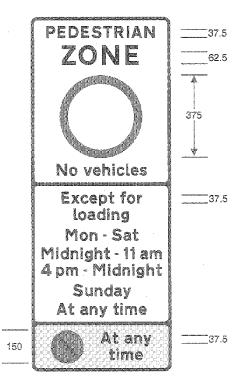

818.3 Entry to and waiting in pedestrian zone restricted (Alternative types)

ltem	
1	Regulations: 22
2	Directions: 7, 3, 22(2)
3	Diagrams: 618.4, 637.2
4	Permitted variants: Schedule 16, items 37, 38 "loading 'may be varied to: 1. 'toading by' with the goods vehicle symbol shown in diagram 616.2 2. 'permit holders" 3. the orange badge symbol shown in diagram 661 4. 'busse' 5. 'tocal busse'' 6. 'taxls" These variants may be used in any combination with each other and with "Except for loading" except
	that 1 shall not be used with "Except for loading", and 4 and 5 shall not be used together. The word "and" shall be inserted before the last variant where more than one is used.
5	Illumination requirements: Schedule 17, item 1

SCHEDULE 2 REGULATORY SIGNS (contd.)

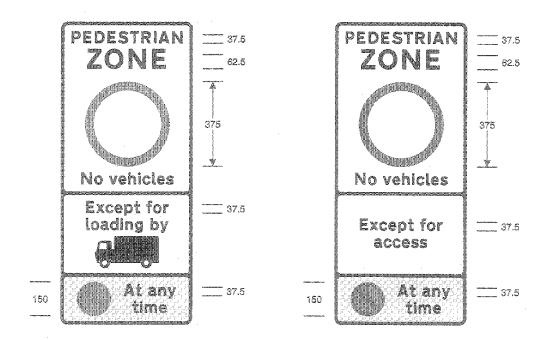


	618.3A	
Entry to e	and waiting in pedestrian zone restricted	
	(Variable message sign)	

ltem	
1	Regulations: 22
2	Oirections: 7, 8, 22(2), 49
3	Diagrams: 618.4, 637.2
4	Permitted variants: The diagram 617 symbol may be varied to a diagram 618 symbol in which case the words "No vehicles" shall be omitted. "toading by" and the goods vehicle symbol may be varied to: 1. "loading" 2. 'permit holders" 3. the orange badge symbol shown in diagram 681 4. 'buses" 5. "local buses" 6. "taxis" These variants may be used in any combination with each other and with "Except for loading by" and the goods vehicle symbol, axcept that 1 shall not be used with "Except for loading by" and the goods vehicle symbol, and 4 and 5 shall not be used together. The word "and" shall not be used.
5	Illumination requiraments:


SCHEDULE 2 REGULATORY SIGNS (contd.)






819.1 Motor vehicles except motorcycles without sidecars prohibited

item	
1	Regulations: None
2	Directions: 7, 8, 19
3	Diagrams: 620, 620.1
<i>4</i> 5,	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1



619 Motor vehicles prohibited

ltem	
1	Regulations: None
2	Directions: 7, 6, 19
3	Diegrams: 620, 520.1
4	Permitted variants: None
5	liumination requirements: Schedule 17, item 1




619.2 Motorcycles prohibited

ltem	
1	Regulations: None
2	Directions: 7, 8, 19
3	Diagrame: 820
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1

SCHEDULE 2 REGULATORY SIGNS (contd.)






620

Vehicles requiring access to premises or land adjacent to the road are exempted from the prohibition conveyed by the associated sign

item	
1	Regulations: 22
2	Directions: 7, 8, 19
3	Diagrams: 619, 619.1, 619.2, 622.1A, 622.5, 622.6, 629, 629.1, 952
4	Permitted variants: Schedule 16, item 38 Same as diagram 618.1
5	Illumination requirements: Schedule 17, item 8




622.1A Goods vehicles exceeding the maximum gross weight indicated on the goods vehicle symbol prohibited

ltern	
1	Regulations: None
5	Directions: 7, 8, 19
3	Diagrams: 554.3, 820
4	Permitted variants: "7.5T" may be varied to "17T"
5	lilumination requirements: Schedule 17, item 1

620.1

Goods vehicles requiring to enter the road for loading or unloading of goods exempted from the prohibition conveyed by the associated sign

item	
1	Regulations: None
2	Directions: 7, 8, 19
3	Diagrams: 619, 619.1
4	Permitted variants: Schedule 16, item 38
5	Illumination requirements: Schedule 17, item 8





622.2 End of prohibition of goods vehicles exceeding the maximum gross weight indicated by signs to diagram 622.1A

tem	-
1	Regulations: None
2	Directions: 7, 9
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Scheduls 17, item 1

SCHEDULE 2 REGULATORY SIGNS (contd.)

ltem







622.5

Horse drawn vehicles prohibited

622.4 Articulated vehicles prohibited


itern	
1	Regulations: None
2	Directions: 7, 8, 19
3	Diagrams: 554.3
4	Permitted variants: "No anticulated vehicles" may be varied to "No track laying vehicles"
5	Illumination requirements: Schedule 17, item 1

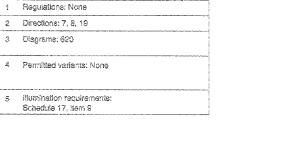



622.6 Ridden or accompanied horses prohibited


hem	
1	Regulations: None
2	Directions: 7, 8, 19
3	Diagrams: 620
4	Permitted varianis: None
6	Iliumination requirements: Schedule 17, item 9



625.1 Pedestrians prohibited


ltem	
1	Regulations: None
2	Directions: 7, 8
3	Diagrams: None
4	Permitted variants: None
5	Il'umination requirements: Schedule 17, item 9

SCHEDULE 2 REGULATORY SIGNS (contd.)

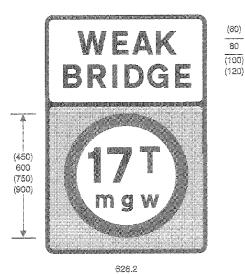

Vehicles exceeding the maximum gross weight indicated prohibited from crossing the bridge or other structure

ltern	
1	Regulations: 10(1)
2	Directions: 7, 8, 19
3	Diagrams: 627.1
đ,	Permitted variants: "17T" may be varied to "3T", "7.5T", "10T", "13T", "25T" or "33T"
5	(llumination requirements: Schedule 17, item 1




829 Vehicles exceeding width indicated prohibited

ltem	
1	Regulations: None
2	Directions: 7, 8, 19, 35
3	Diagrams: 554.3, 620, 954, 954.1, 954.2
4	Permitted variants: Schedule 16, items 1, 2
5	Illumination requirements: Schedule 17, item 1



627.1 Exemption for unladen vehicles from the prohibition conveyed by the sign in diagram 626.2


item	
1	Regulations: None
5	Directions: 7, 8, 19
3	Diagrams: 626.2
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



629.1 Vehicles or combinations of vehicles exceeding length indicated prohibited


item	
1	Regulations: None
2	Directions: 7, 8, 19, 35
8	Diagrams: 554.3, 620, 954, 954.1, 954.2
4	Permitted variants: Schedule 16, items 1, 2
5	Illumination requirements: Schedule 17, item 1

SCHEDULE 2 REGULATORY SIGNS (contd.)




629.2 Vehicles exceeding height indicated prohibited

ltem	
1	Regulations: 10(1), 10(2)
2	Directions: 7, 8, 19
3	Diagrams: 530.2
4	Permitted variants: Schedule 16, item 1
5	filumination requirements: Schedule 17, ftem 1



632 No overtaking

item	
1	Regulations: None
2	Directions: 7, 8, 10, 19
з	Diagrams: 554.3, 570, 845
4	Permitted variants: None
5	Illumination requirements: Schedule 17. item 1



629.2A As diagram 629.2, with height indicated in both metric and imperial units


ltem	
1	Regulations: 10(1), 10(2)
2	Directions: 7, 8, 19
3	Diagrame: 530.2
4	Permitted variants: Schedule 15, item 1
5	lliumination requirements: Schedule 17, item 1



633 Vehicular traffic must not proceed beyond the sign where displayed temporarily by a police officer in uniform or a traffic warden

item	
1	Regulations: 42
2	Directions: None
3	Diagrams: None
4	Permitted verlants: None
5	liumination requirements: Sohedule 17, item 4

SCHEDULE 2 REGULATORY SIGNS (contd.)




636 Temporary prohibition of waiting except for loading and unloading

ltem	
1	Regulations: 12(7)
2	Directions: 7, 10, 19
3	Diagrams: 636.1, 843, 644
4	Permitted variants: Name of the police force or the word "Police" may be added above or below the roundel
5	Illumination requirements: Schedule 17, item 9




636.1 Temporary prohibition of loading and unloading

ltem	
1	Regulations: None
2	Directiona: 7, 10
3	Diagrams: 636
4	Permitted variants: None
5	litumination requirements: Schedule 17, item 9



	And the second s	
	I and a	
40 min	Dececer (Coccece)	
80 max	At any fimal	20 min
	l vran muzi	40 max




ltem	
1	Regulations: None
2	Directions: 7, 10, 22, 23
3	Diagrams: 1018.1
4	Permitted variants: Schedule 16, Item 11
5	Illumination regultements: Schedule 17, item 9



637.1 Continuous prohibition on waiting except loading or unloading on verge or foctway

ltem	
1	Regulations: None
2	Directions: 7, 10
3	Diagrams: None
ŝ,	Permitted variants: Schedula 16, item 11 The sign shown in diagram 642 may be substituted for the symbol of the sign shown in diagram 636. The words "verge or" or "or footway " may be omitted.
5	tilumination requirements: Schedule 17, item 9

SCHEDULE 2 REGULATORY SIGNS (contd.)

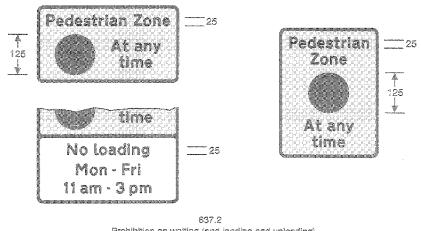

Prohibition on walting (and loading and unloading) in a pedestrian zone (Alternative types)

item	
1	Regulations: None
2	Directions: 7, 10, 22, 23
3	Diegrams: 618.2, 618.3, 618.3A, 1017, 1018.1, 1019, 1020.1
4	Permitled variants: Schedule 16, item 37
5	lilumination requirements: Schedule 17, item 9




637.3 Continuous prohibition on waiting except for loading and unioading for at least 4 consecutive months


ltem	
1	Regulations: None
2	Directions: 7, 10, 22, 23
3	Diagrams: 1018.1
4	Permitted variants: Schedule 16, items 11, 37
5	lliumination requirements: Schedule 17, item 9




638 Continuous prohibition on loading and unloading

item	
1	Regulations: 12(7)
2	Directions: 7, 10, 22, 23
S	Diagrams: 1020.1
6,	Permitted variants: Schedule 16, item 11 "at bus stop" may be inserted after "No loading"
5	filumination requirements: Schedule 17, item 9



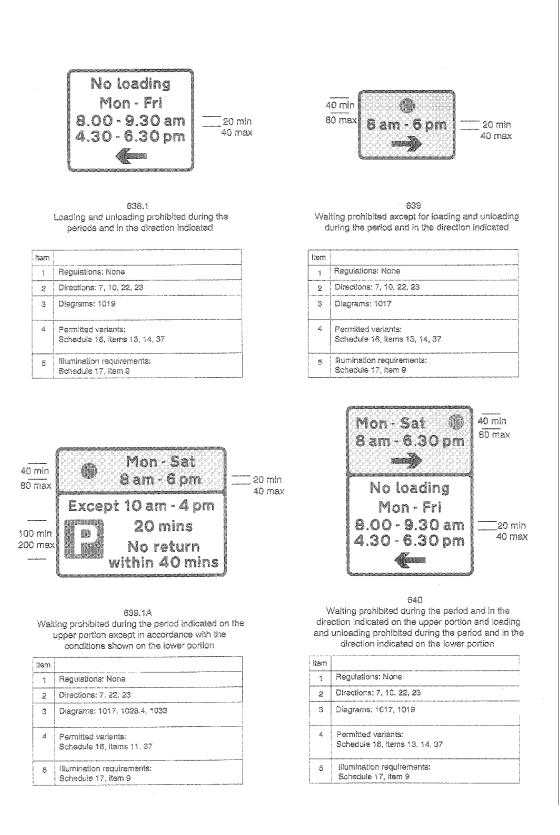


SCHEDULE 2 REGULATORY SIGNS (contd.)




640.1 Walting, loading and unloading prohibited at a parking place where parking is temporarily suspended (indication on parking meter cover)

ltem	
1	Regulations: None
2	Directions: None
З	Diagrams: None
4	Permitted variants: "during meter control" may be added. "No loading" may be omitted.
5	Illumination requirements: Schedule 17, item 8



640.2A Waiting by goods vehicles over maximum gross weight shown prohibited during the periods and in the direction indicated

ltəm	
1	Regulations: 24(1)
2	Directions: 7
3	Diagrams: None
¢.	Permitted variants: Schedule 16, items 13, 14, 37 "51" may be varied to "7,51". The bus symbol shown in diagram 952 may be added below or substituted for the lorry symbol.
5	illumination requirements: Schedule 17, item 9

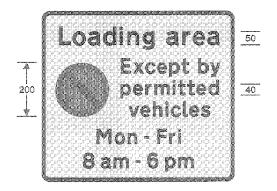

640.3 Entrance to a designated off-highway loading area in which waiting restrictions apply


item		
1	Regulations: None	
2	Directions: 7	
3	Diagrams: Nons	••••
4	Permitted variants: Schedule 18, item 37	
5	Illumination requirements: Schedule 17, item 9	

SCHEDULE 2 REGULATORY SIGNS (contd.)





640.4 Waiting prohibited in a designated off-highway loading area during the period indicated except by permitted vehicles

ltem	
1	Regulations: None
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, item 37
5	lilumination requirements: Schedule 17, Item 9




640.5 End of designated off-highway loading area In which waiting restrictions apply





642 No stopping on main carriageway

item	
1	Regulations: 12(7)
2	Directions: 7, 8, 10, 19
3	Diagrame: 570, 643, 644, 645
4	Permitted variants: None
ŝ	Illumination requirements: Schedule 17, items 1, 4

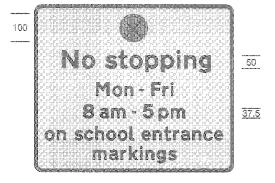


642.2 No stopping at school entrance during periods indicated

item	
1	Regulations: None
2	Directions: 7, 20, 22
3	Diagrams: 1027.1
4	Permitted verlants: Schedule 16, item 37
5	tilumination requirements: Schedule 17, item 9

SCHEDULE 2 REGULATORY SIGNS (contd.)





642.3 No stopping in lay-by except in emergency

ltem	
1	Regulations: None
2	Directions: 7, 22, 23
3	Diagrams: 1018.1, 1020.1, 2714, 2715
4	Permitted variants: None
5	Illumination requiraments: Schedule 17, item 9




644 Restriction or prohibition conveyed by associated

sign applies in direction indicated

ltern	
1	Regulations: 12(7)
2	Directions: 7, 19
S	Diagrams: 636, 642
¢.	Permitted variants: Schedule 16, Item 13
õ	lilumination requirements: Schedule 17, item 8

643 Restriction or prohibition conveyed by associated sign applies in both directions

liem	
1	Regulations: 12(7)
2	Directions: 7, 19
3	Diagrams: 636, 642
4	Permitted variants: None
×.	. Illumination requirements:
	Schedule 17, Item 8





645

End of restriction or prohibition conveyed by associated sign or, when used with the sign shown in diagram 7001, end of all restrictions or prohibitions associated with road works

ltəm	
1	Regulations: 12(7)
2	Directions: 9, 19
3	Diagrams: 614, 615, 632, 642, 811, 7001
4	Parmitted variants: None
ő	Illumination requirements: Schedule 17, item 8

SCHEDULE 2 REGULATORY SIGNS (contd.)

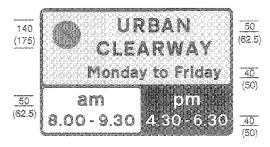

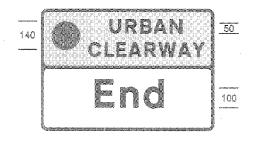

648 No stopping during periods indicated except for so long as may be necessary for the purpose of picking up or setting down passengers

ltem	
4	Regulations: None
2	Directions: 7, 8, 10
3	Diagrams: None
4	Permitted variants: Schedule 16, ilem 37
5	Illumination requirements: Schedule 17, item 4


647 End of restriction on stopping

hem	
į	Regulations: None
2	Directions: 7, 9
3	Diagrams: None
4	Parmitted variants: None
5	Illumination requirements: Schedule 17, item 4



650.1 Prohibition on stopping by vehicles other than taxis during period indicated


ltem	
1	Regulations: None
2	Directions: 7, 22, 23
3	Diagrams: 857.1, 1028.2
4	Permitied variants: Schedule 16, items 11, 37
5	Illumination requirements: Schedule 17. Item 9




650.2 Prohibition on waiting by vehicles other than taxis during period indicated


ltem	
1	Regulations: None
2	Directions: 7, 22, 23
3	Diagrams: 857.1, 1028.2
4	Permitted variants: Schedule 16, items 11, 37
8	Illumination requirements: Schedule 17, item 9

SCHEDULE 2 REGULATORY SIGNS (contd.)

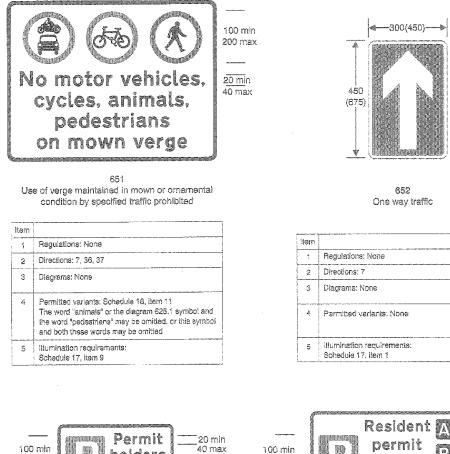







660.3 Parking place reserved for holders of residents' permits

holders

only


20 min 40 max

ľâ

ltem	
1	Regulations: None
2	Directions: 7, 22, 23
3	Diagrams: 1028.4, 1033
4	Permitted variants: Schedule 16, items 11, 38 The code latters may be varied as appropriate, "Resident permit holders only" may be varied to: 1. "Permit holders only" 2. "Doctor permit holders only" 3. "Business permit holders only"
5	Illumination requirements: Schedule 17, item 9

200 max


SCHEDULE 2 REGULATORY SIGNS (contd.)

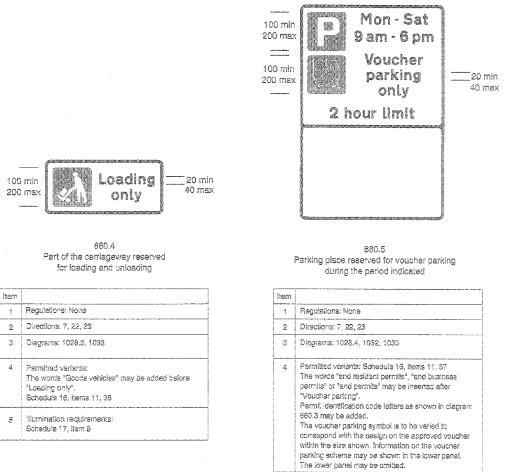

5 Illumination requirements: Sohedule 17, item 9


SCHEDULE 2 REGULATORY SIGNS (contd.)



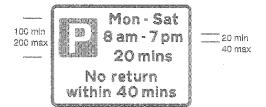



661 Parking place reserved for disabled badge holders

item	
1	Regulations: None
2	Directions: 7, 22, 23
3	Diagrams: 1028.3, 1033
4	Permitted variants: Schedule 16, Items 11, 38
5	Illumination requirements: Schedule 17, item 9




ltem	
Ĭ	Regulations: None
2	Directions: 7, 22, 23
3	Diagrems: 1028.4, 1033
4	Permitted variants: Schedule 16, Items 11, 37 The legend may be varied to accord with the conditions imposed on the parking place, or varied to the word "Free"
5	Illumination requirements: Schedule 17, item 9






561.2 'Pay and Display' ticket-regulated parking place







llem	
1	Regulations: None
2	Directions: 7
3	Diagrams: 1028.4, 1032, 1033, 661.4
4	Permitted variants: Schedule 16, Item 38
5	Illumination requirements: Schedule 17, item 9

SCHEDULE 2 REGULATORY SIGNS (contd.)

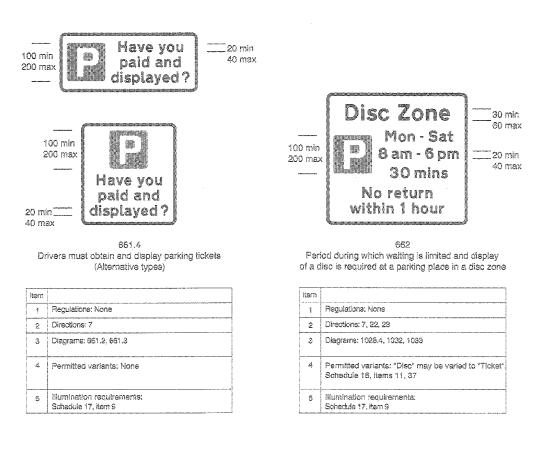


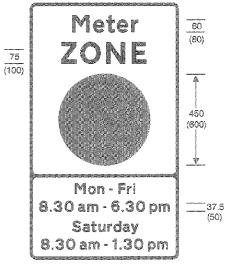






SCHEDULE 2 REGULATORY SIGNS (contd.)

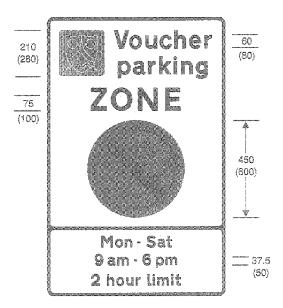

663.1 Entrance to a voucher parking zone

ł


ltem	
٦	Regulations: None
2	Directions: 7, 8, 23, 24
3	Diagrams: 1017, 1018.1, 1019, 1020.1, 1028.3, 1028.4, 1033
4	Permitted variants: Schedule 18, item 37 The reference to a time limit may be omitted. The voucher parking symbol is to be varied to correspond with the design on the approved voucher within the size shown. The legend "No loading" may be added below the no waiting roundel.
ð	Illumination requirements: Schedule 17, Item 4




664 End of controlled or voucher parking zone

Item	
1	Regulations: None
2	Directions: 7, 9, 24
3	Diagrams: 1017, 1018.1, 1019, 1020.1, 1028.3, 1028.4, 1032, 1033
4	Permitted variants: None
5	Illumination requirements: Schedule 17, Item 4

SCHEDULE 2 REGULATORY SIGNS (contd.)

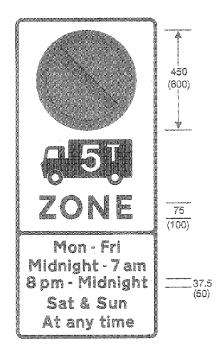

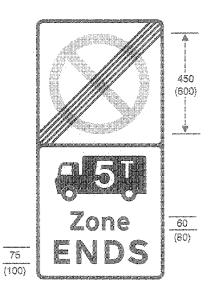


865 Entrance to a controlled parking zone applying to goods vehicles over maximum gross weight shown

ltern	
1	Regulations: 24(1)
2	Directions: 7, 8, 23, 24
3	Diagrams: None
4	Permitted variants: Schedule 16, item 37 "5T" may be varied to "7.5T" The bus symbol shown in diagram 952 may be added below or substituted for the lorry symbol
5	lilumination requirements: Schedule 17, item 4

666 End of a controlled parking zone applying to goods vehicles over maximum gross weight shown

ltem	
1	Regulations: 24(1)
2	Directions: 7, 9, 23, 24
3	Diagrams: None
4	Permitted variants: "51" may be varied to "7.57" The bus symbol shown in diagram 952 may be added below or substituted for the lorry symbol
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 2 REGULATORY SIGNS (contd.)






667 Vehicles may be parked partially on the verge or footway

ltem	
1	Regulations: None
2	Directions: 7, 8
3	Diagrams: None
4	Permitted veriants: None
5	Illumination requirements: Schedule 17, item 9


867.1 Vehicles may be parked partially on the varge or footway during the period indicated

ltem	
1	Regulations: None
2	Directions: 7, 8
3	Dlagrams: None
4	Permitted variants: Schedule 16, item 37
6	Illumination requirements: Schedule 17, Item 9



667.2 End of area where vehicles may be parked partially on the verge or footway

item	
1	Regulations: None
2	Directions: 7, 9
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, Item 9



668 Vehicles may be parked wholly on the verge or footway


item	
1	Regulations: None
2	Diractions: 7, 8
S	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9

SCHEDULE 2 REGULATORY SIGNS (contd.)



668.1 Vehicles may be parked wholly on the verge or footway during the period indicated

ltem		
1	Regulations: None	
2	Directions: 7, 8	
3	Diagrams: None	
4	Permitted variants: Schedule 18, item 37	
5	Illumination requirements: Schedule 17, item 9	



4

¥

668.2 End of area where vehicles may be parked wholly on the verge or footway

Item	
1	Regulations: None
2	Directions: 7, 9
3	Diagrams: None
4	Permitted variants: None
5	lliumination requirements: Schedule 17, item 9



60 min 200 max


669 Nature of and distance to a prohibition, restriction or requirement ahead


itam Regulations: None 1 Directions: 7 2 3 Diagrams: None Permitted variants: Schedule 16, items 6, 10, 11 The legend shall be varied to accord with the prohibition, restriction or requirement. 4 Illumination requirements: Schedule 17, item 1 5


SCHEDULE 2 . REGULATORY SIGNS (contd.)




669.1 Same as diagram 669








ltem	
1	Regulations: None
2	Directions: 7, 9, 10
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 10, 11



670 Maximum speed limit


ltern	
1	Regulations: 46
2	Directions: 7, 8, 10
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1
5	lilumination requirements: Schedule 17, items 10, 11



672 Minimum speed limit


Item	
1	Regulations: None
2	Directions: 7, 8, 10
3	Diegrams: None
C,	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, Items 10, 11

SCHEDULE 2 REGULATORY SIGNS (contd.)





673 End of a minimum speed limit

ltem	
1	Regulations: None
2	Directions: 7, 9
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, items 10, 11

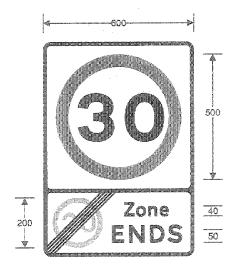

675 End of a 20mph speed limit zone

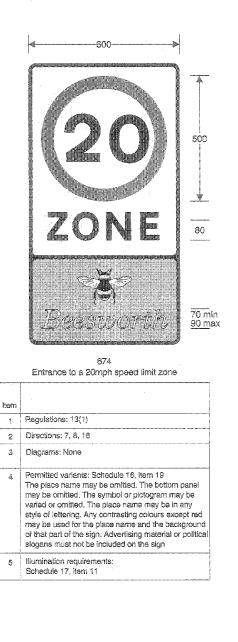



SCHEDULE 3

Regulation 11(1)


SIGNS FOR RAILWAY AND TRAMWAY LEVEL CROSSINGS

SCHEDULE 3 Regulation 11(1) SIGNS FOR RAILWAY AND TRAMWAY LEVEL CROSSINGS ž 600 (750) (900) (1200) 600 (750) (900) (1200) (1500) (1500) 771 770 Railway level crossing without gate or barrier ahead Level crossing with gate or barrier ahead Item Item Regulations: None 1 Regulations: None 1 Directions: 19 2 Directions: 19 2 Diagrams: 572, 578, 773 З Diagrams: 572, 573, 773 3 4 Permitted variants: None 4 Permitted variants: None illumination requirements: Schedule 17, item 1 Illumination requirements: Schedule 17, item 1 б 5 -675 (810)(1080)(1350)--400 (480) (640) (800) (450) 600 (750) (900) Ŵ STOP 75 (1200) (1500) (120) (150) when 62.5 (100) (125) lights show 773 Light signals as shown in diagram 3014 ahead 772 Tramcars crossing ahead item ltem 1 Regulations: None 1 Regulations: None 2 Directions: 19 2 Directions: 19 з Diagrams: 572, 573, 773 3 Diagrams: 529, 529.1, 558, 770, 771, 772 4 Permitted variants: None 4 Permitted variants: None lilumination requirements: Schedule 17, item 1 5 Illumination requirements: 5 Schedule 17, item 8

99

SCHEDULE 3 SIGNS FOR RAILWAY AND TRAMWAY LEVEL CROSSINGS (contd.)

(200)

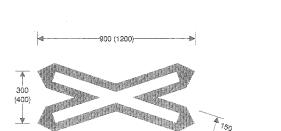




774 Location of railway or tramway level crossing without gate or barrier

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: 602 with 778 or 778.1, 3014
4	Permitted variants: None
5	illumination requirements: Schedule 17, item 4

775 Vehicular traffic must not stop within the area of a railway or tramway level crossing

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: 3014
4	Permitled variants: None
5	Illumination requirements: Schedule 17, item 4



776 Another train or tramcar may be about to pass over the crossing

Item	
1	Regulations: 18(2), 19(1)
2	Directions: 48(6), 49
3	Diagrams: 3014
4	Permitted variants: "TRAIN" may be varied to "TRAM"
5	lilumination requirements: Schedule 17, item 14





777 Level crossing ahead is crossed by more than one railway or tramway track, and more than one train or tramcar may pass over it in quick succession

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: 3014
4	Permitted varients: "TRAIN" may be varied to "TPAM"
5	Illumination requirements: Schedule 17, item 4


SCHEDULE 3 SIGNS FOR RAILWAY AND TRAMWAY LEVEL CROSSINGS (contd.)

≪—440 (550) (660)—≫






ltern	
1	Regulations: 10(1), 16, 25(3)
2	Directions: 19
3	Diagrams: 602, 1003, 1023
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



778.1 Open tramway level crossing without light signals

ltem	
1	Regulations: 10(1), 16, 25(3)
2	Directions: 19
3	Diagrams: 602, 1003, 1023
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



779 Electrified overhead cable ahead

item	
1	Regulations: None
2	Directions: 18, 19
3	Diagrams: 780, 780.1, 780.2
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1



780 Safe height beneath electrified overhead cable ahead

Item	
1	Regulations: 17(4)
2	Directions: 18, 19, 35
S	Diagrams: 779
4	Permitted variants: Schedule 16, items 1, 2 Legend may appear on three lines
5	Illumination requirements: Schedule 17, item 8

SCHEDULE 3 SIGNS FOR RAILWAY AND TRAMWAY LEVEL CROSSINGS (contd.)






780.1 Safe height beneath electrified overhead cable in direction and at distance indicated

tem	
1	Regulations: 17(4)
2	Directions: 18, 19, 35
3	Diagrams: 779
4	Permitted variants: Schedule 16, items 1, 2, 6, 12, 14
5	Illumination requirements:
	Schedule 17, Item 8

780.2 Safe height beneath electrified overhead cable ahead provided with a load gauge shown in diagram 781


ltem	
1	Regulations: 17(4)
2	Directions: 18, 19, 35
3	Diagrams: 779
4	Permitted variants: Schedule 16, items 1, 2
5	illumination requirements: Schedule 17, item 8



781 Load gauge giving audible warning to drivers where vehicle exceeds safe height under electrified overhead cables

item	
1	Regulations: 19(1)
2	Directions: 38
3	Diagrams: None
4	Permitted variants: Schedule 16, item 40
5	illumination requirements: None

SCHEDULE 3 SIGNS FOR RAILWAY AND TRAMWAY LEVEL CROSSINGS (contd.)



782 Risk of grounding at a railway or tramway level crossing or hump backed bridge

ltem

2

3 4

5

Regulations: None

Permitted variants: None

Illumination requirements: Schedule 17, item 1

Directions: 19 Diagrams: 528, 572, 573



50 min 100 max

783 Drivers of long low vehicles must obtain permission before using an automatic railway or framway level crossing

ltern	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Parmitted variants: "LONG LOW" may be varied to "LARGE OR SLOW*
5	Illumination requirements: Schedule 17, item 4

Drivers of LARGE or SLOW VEHICLES must phone and get permission to cross 75 max 45 min LARGE means over 55' long or 9'6" wide or 38 tonnes total weight 50 may SLOW means 5 mph or less 30 min

784 Drivers of large or slow vehicles must stop and telephone before using an automatic railway or tramway level crossing

Regulations: 10(1), 10(2), 16
Directions: None
Diagrams: None
Permitted variants: None
Illumination requirements: Schedule 17, item 1




785 Details of telephone number for contacting railway or tramway operator

item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: "081-123 4567" shali be varied to the appropriate telephone number. "BR" may be varied to "RAILWAY" or "TRAM Co."
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 3 SIGNS FOR RAILWAY AND TRAMWAY LEVEL CROSSINGS (contd.)






736 Place where large or slow vehicles should wait near an automatic railway or tramway level crossing while the driver obtains permission to cross

ltem	
1	Regulations: None
2	Directions: None
з	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4


787 Site of emergency telephone or telephone at or near a railway or tramway level crossing

ltem		
1	Regulations: None	
2	Directions: None	
3	Diagrams: None	
4	Permitted variants: None	
5	Illumination requirements: Schedule 17, item 4	



788 Direction to emergency telephone or telephone at or near a railway or tramway level crossing


item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, item 13
5	filumination requirements: Schedule 17, item 4



789, 789.1, 789.2 Countdown markers to concealed railway or tramway level crossing

tem	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, item 26
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 3 SIGNS FOR RAILWAY AND TRAMWAY LEVEL CROSSINGS (contd.)



790 New method of controlling traffic at a railway or tramway level crossing ahead

Item	
1	Regulations: None
2	Directions: 32
э	Diagrams: None
4	Permitted variants: None
5	filumination requirements: Schedule 17, item 1

SCHEDULE 4


Regulation 11(1)

OTHER INFORMATORY SIGNS


SCHEDULE 4

OTHER INFORMATORY SIGNS

Regulation 11(1)




801 Parking place



804.1 Parking place for goods vehicles


ltem	
1	Regulations: None
2	Directions: 19, 23
3	Diagrams: 804.1, 804.2, 804.3, 1028.4, 1063
4	Permitted variants: None
5	lilumination requirements: Schedule 17. Item 4

tern	
1	Regulations: None
2	Directions: 7, 19
3	Diagrams: 801
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



804.2 Parking place for motor cars

Item	
1	Regulations: None
2	Directions: 7, 19
3	Diagrams; 801
4	Permitted variants: None
5	Numination requirements: Schedule 17, item 8



804.3 Parking place for motorised caravans or caravans drawn by motor vehicles

ltem	
1	Regulations: None
2	Directions: 7, 19
3	Diagrams: 801
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)



810 One way traffic in direction indicated (Sign for pedestrians)

item	
1	Regulations: None
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, item 13
5	Illumination requirements: Schedule 17, item 9

700(875) (1050)(1400)

Priority over

oncoming vehicles

811.1

item 1

3

4

5


1 Regulations: None 2 Directions: 16, 19

Permitted variants: None

Illumination requirements: Schedula 17, item 8


Diagrams: 811

Explanatory plate for the sign shown in diagram 811



811 Traffic has priority over vehicles from the opposite direction

ltern	
1	Regulations: None
2	Directions: 17, 18, 19
3	Diagrams: 570, 615, 645, 811.1, 1043, 1044
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4




814.1 Stepped entrance to pedestrian subway

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	illumination requirements: Schedule 17. item 9


(62.5) (75) (100)

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)




814.2 Ramped entrance to pedestrian subway

ltøm	
٦	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: The wheelchair symbol shall be omitted where the subway is not suitable for use by disabled people and the width of the sign reduced to 300mm
5	illumination requirements: Schedule 17, item 9




814.4 Ramped approach to pedestrian overbridge

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Same as diagram 814.2
5	Illumination requirements: Schedule 17, item 9



814.3 Stepped approach to pedestrian overbridge


ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9



816 No through road for vehicular traffic

Item	
1	Regulations: None
2	Directions: 19
3	Diagrams: 954.4
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4


SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)



816.1 Alternative to the sign shown in diagram 816 with a street nameplate

ltem	
1	Regulations: None
2	Directions: None
З	Diagrams: None
4	Permitted variants: The blue panel need not extend to the edge of the name plate . The black border may be omlifted
5	illumination requirements: Schedule 17, item 9






817 No through road for vehicular traffic in direction indicated from junction ahead

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, Item 16
5	Illumination requirements: Schedule 17, item 4





ltem	
1	Regulations: None
2	Directions: 19
3	Diagrams: 523.1, 554.1
4	Permitted variants: Schedule 16, item 16 "ahead" may be varied to a distance or an arrow symbol.
5	Illumination requirements: Schedule 17, item 8



818 Section of dual carriageway road begins directly ahead

ltem	
×.	Regulationa: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements; Schedule 17, item 1

ltern

1 2

з

4

Regulations: None

Directions: None

Diagrams: None

Permitted variants: Schedule 16, item 6

5 lilumination requirements: Schedule 17, item 1

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)



818.1 Distance to a section of dual carriageway road ahead



818.1A Distance over which a short length of dual carriageway road beginning directly ahead extends

item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
ą	Permitted variants: "1/2 mile" may be varied to "1/4 mile".
5	Illumination requirements:

Unsuitable for motor vehicles

820 Road unsuitable for type of vehicle indicated

ltem	
1	Regulations: 22
2	Directions: None
3	Diagrams: None
4	Permitted variants: "motor vehicles" may be varied to 1. "caravans" 2. "heavy goods vehicles" 3. "wide vehicles" 4. "iong vehicles" 5. "articutated vehicles" 6. "traitars" 7. "buses and coaches"
5	Iliumination requirements: Schedule 17, item 4




821 Road ahead only wide enough for one line of vehicles, but has passing places at intervals

ltern	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: "with passing places" may be varied to "Use passing places to permit overtaking"
5	Illumination requirements: Schedule 17, item 4

and the second second

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)




822 Passing place on a narrow road

item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted veriants: None
5	Illumination requirements: Schedule 17. Item 4

∢___700 →

823

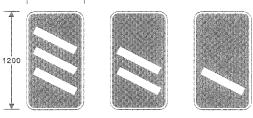


825

823, 824, 825 Distance in hundreds of yards to a roundabout or the next point at which a driver may leave a motorway or other route

824

ltem	
1	Regulations: None
2	Directions: 14
3	Diagrams: None
4	Permitted variants: Schedule 16, item 28 Background colour shall be varied to green on primary routes, and white with black symbols and borders on non-primary routes.
5	Illumination requirements: Schedule 17, Item 4

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)






item	
1	Regulations: None
2	Directions: None
З	Diagrams; None
4	Permitted variants: None
5	Numination requirements: Schedule 17, tem 9



826.1 As diagram 826, showing metric and imperial measurements


ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)



827.1 Hospital ahead without accident and emergency facilities

ltem	
1	Regulations: None
2	Directions: None
3	Diegrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



827.2 Hospital ahead with accident and emergency facilities

item	
1	Regulations: None
2	Directions: None
3	Diagrams: 801
4	Permitted variants: The legend "not 24 hrs" may be omitted
5	Illumination requirements: Schedule 17, item 4



829.1 Potential danger temporarily ahead and consequent need to proceed with caution

Item	
1	Regulations: 14, 42
2	Directions: 34(2)
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



829.2 Accident ahead and consequent need to proceed with caution


item	
1	Regulations: 14, 42
2	Directions: 34(2)
Э	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)



829.3 Traffic should use the hard shoulder in an emergency

item	
1	Regulations: 14, 42
2	Directions: 34(2)
S	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4




830 Vehicles will be required to stop at a traffic survey

ltern	
1	Regulations: None
2	Directions: 28
3	Diagrams: None
4	Permitted variants: "CENSUS POINT" may be varied to "WEIGHT CHECK"
5	Illumination requirements: Schedule 17, item 4



829.4 End of temporary permission for traffic to use the hard shoulder

ltern	
1	Regulations: 14, 42
2	Directions: 34(2)
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



830.1 Vehicles may be directed to stop at a traffic survey ahead

ltern	
5	Regulations: None
2	Directions: 28
3	Diagrams: None
4	Permitted variants: "CENSUS" may be varied to "WEIGHT CHECK"
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)



830.2

Goods vehicles may be directed to stop ahead by a police officer in uniform for the purposes of sections 67, 68 or 78 of the Road Traffic Act 1988

Item 1

3

Ą


5

1 Regulations: None 2 Directions: None

Diagrams: None


Permitted variants: None


lliumination requirements: Schedule 17, Item 4 ----- 75 min ----- 250 max



830.3 Vehicles should stay in lane for the purposes of a traffic survey or weight check ahead

ltem	
1	Regulations: None
2	Directions: 28
З	Diagrems: None
4	Permitted variants: "STAY" may be varied to "GET"
5	Illumination requirements: Schedule 17, item 4





item	
1	Regulations: None
2	Directions: 28
3	Diagrams: None

3	Diagrams: None
4	Permitted variants: Same as diagram 830
5	litumination requirements: Schedule 17, item 4




_____37.5 min _____100 max

----- 75 min ----- 200 max

831.1 Vehicle excise licence check point ahead

item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 4 OTHER INFORMATORY SIGNS (comd.)




832 Location of traffic survey

Item	
1	Regulations: None
2	Directions: 28
3	Diagrams: None
4	Permitted variants: Same as diagram 830
5	Illumination requirements: Schedule 17, item 4



832.1 Vehicle check point ahead

item	
ŝ	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: "Department of Transport" may be varied to "GOODS VEHICLE"
5	Illumination requirements: Schedule 17, item 4



832.2

Vehicle condition check point ahead

ltern

3

4

6

1 Regulations: None 2 Directions: None

Diagrams: None


Permitted variants: None

Illumination requirements: Schedule 17, item 4



832.3 Goods vehicles may be directed to leave the motorway at a junction ahead

ltern	
¥	Regulations: 24
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: The bus symbol shown in diagram 952 may be added below the lorry symbol
5	Illumination requirements: Schedule 17, item 4

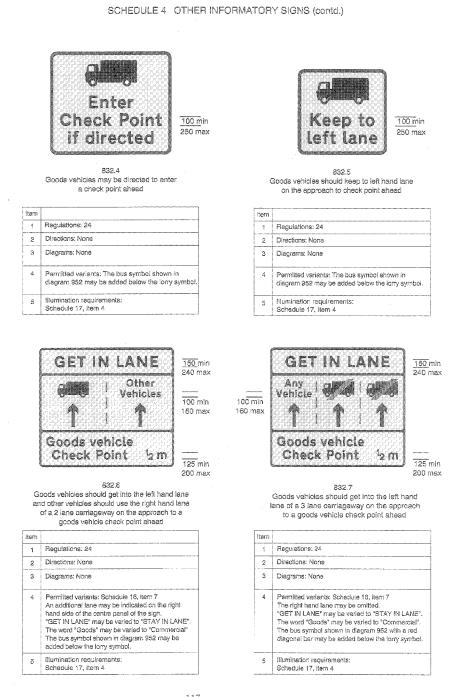



SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)





832.8 Goods vehicles should leave the main carriageway of a road on the approach to a goods vehicle check point

item	
1	Regulations: None
2	Directions: None
Э	Diagrams: None
4	Permitted variants: The word "goods' may be varied to "commercial"
5	Numination requirements: Schedule 17, item 4

832.9 Direction to a commercial vehicle check point

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, item 15
5	illumination requirements: Schedule 17, item 4




____ 75 min 200 max

832.10 End of goods vehicle check point area

item	
1	Regulations: None
2	Directions: None
з	Diagrams: None
4	Permitted variants: The word "Goods" may be varied to "Commercial"
5	filumination requirements: Schedule 17, item 4

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)



833 Entrance to a private access road or property

item	
١	Regulations: None
2	Directions: 29
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9




834 Exit from a private access road or property

item	
1	Regulations: None
2	Directions: 29
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9


835 Exit from a private access road or property to a public road not allowed

ltem	
1	Regulations: None
2	Directions: 29
3	Diagrams: None
4	Parmitted variants: None
5	lilumination requirements: Schedule 17, item 9




836 Entry to a private access road or property from a public road not allowed

ltem	
1	Regulations: None
5	Directions: 29
3	Diagrams: None
4	Permitted variants: Nona
5	Illumination requirements: Schedule 17, item 9

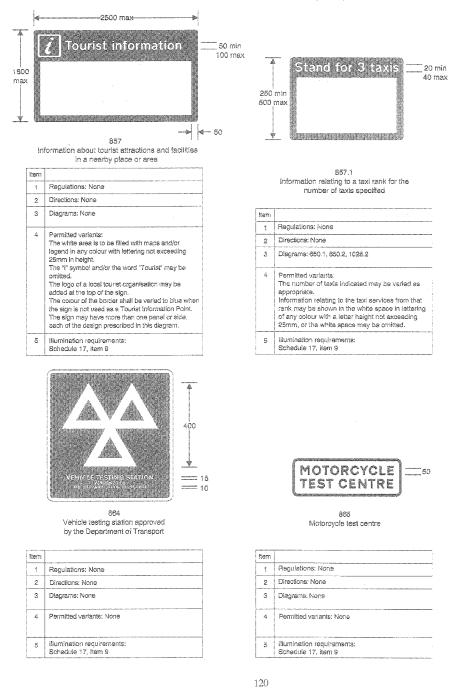


SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)



868 Additional traffic lane joining from the left ahead

ltem	
1	Regulations: None
2	Directions: 14, 19
3	Diagrams: 876
4	Permitted variants: Schedule 16, item 16 Background colour to be varied to blue with white symbols on motorways and white with black symbols and border on non-primary routes.
5	Iliumination requirements: Schedule 17, item 1



868.1 Additional traffic lanes joining from the right ahead


Regulations: None
Directions: 14, 19
Diagrams: 876
Permitted variants: Schedule 16, item 16 Same as diagram 868
Illumination requirements: Schedule 17, item 1

872 Number of traffic lanes reduced ahead

ltern	
1	Regulations: None
2	Directions: 14, 19
3	Diagrams: 876
4	Permitted variants: Schedule 16, item 16 Background colour to be varied to blue with white symbols and border on motorways and green with white symbols and border on primary routes
5	Illumination requirements: Schedule 17, item 1

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)

(240)(320) 400 (480)




873 Additional traffic lane joining from the left ahead. Traffic on main carriageway has priority over joining traffic from the right hand lane of the slip road

ltern	
1	Regulations: None
2	Directions: 14, 19
3	Diagrams: 876
4	Permitted variants: Schedule 16, item 16 Background colour to be varied to green with white symbols and border on primary routes and white with black symbols and border on non-primary routes
5	illumination requirements: Schedule 17, item 1

> 874 Additional traffic lanes joining from the right ahead. Traffic in the right hand lane joins the main carriageway. Traffic on the main carriageway has priority over joining traffic


ltem	
ĩ	Regulations: None
2	Directions: 14, 19
3	Diagrams: 876
4	Permitted variants: Schedule 16, item 16 Same as diagram 873
5	Illumination requirements: Schedule 17, item 1

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)

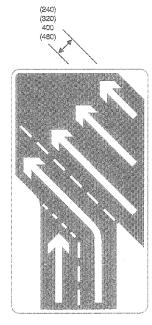

875 Additional traffic lanes joining from the right ahead. Traffic in the right hand lane of the slip road has priority over traffic in the left hand lane


item	
1	Regulations: None
2	Directions: 14, 19
3	Diagrams: 876
4	Permitted variants: Schedule 16, Item 16 Same as diagram 873
5	Illumination requirements: Schedule 17, item 1



876 Distance to the change in the number of lanes indicated by the signs shown in diagrams 868 to 375

item	
1	Regulations: None
2	Directions: 14, 19
3	Diagrams: 868, 868.1, 872, 873, 874, 875
4	Permitted variants: Schedule 16, item 6 Same as diagram 873
ε	Illumination requirements: Schedule 17, item 8

SCHEDULE 4 OTHER INFORMATORY SIGNS (contd.)

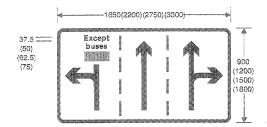

877 Junction ahead where the left hand fane is dedicated to traffic turning left and must not be used by other traffic except buses and where the right hand iane is available both for traffic proceeding ahead and turning right Item 1 Regulations: 22(1)


2	Directions: 14
3	Diagrams: None
4	Permitted variants: Schedule 16, item 16 The background colour shall be varied to green with white symbols and border on primary routies. The words "Except buses" may be omitted.
5	Iliumination requirements: Schedule 17, item 4

SCHEDULE 5

Regulation 11(1)


SIGNS FOR BUS, TRAM AND PEDAL CYCLES FACILITIES

SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES Regulation 11(1)



950 Cycle route ahead

ltem	
1	Regulations: None
2	Directions: 19, 34(4)
3	Diagrams: 572, 573, 950.1
4	Permitted variants: Schedule 16, item 28
Сп	Illumination requirements: Schedule 17, items 1, 4




951 Riding of pedal cycles prohibited

Item	
1	Regulations: None
2	Directions: 7, 8
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



950.1 Training or testing of child cyclists ahead


Item	
1	Regulations: None
2	Directions: 19, 34(4)
3	Diagrams: 960
4	Permitted variants: "tests" may be varied to "training"
5	Illumination requirements: Schedule 17, item 8



952 Buses prohibited


item	
1	Regulations: 24(1)
2	Directions: 7, 8, 19
3	Diagrams: 620, 954.2 after 1.1.97
4	Permitted varianis: None
5	Illumination requirements: Schedule 17, item 1

SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)



953 Route for use by buses and pedal cycles only

item	
1	Regulations: 10(1), 24
2	Directions: 7, 8, 18, 19
3	Diagrams: 953.2
4	Permitted variants: The word "local" in black letters may be placed on the bus symbol. The cycle symbol may be omitted. The word "taxl" in white letters may be added below the bus symbol
5	illumination requirements: Schedule 17, item 1



953.1 Route for use by tramcars only

Item	
1	Regulations: 10(1), 24
2	Directions: 7, 8, 18, 19
3	Diagrams: 953.2
4	Permitted variants: The bus symbol shown in diagram 953 may be added below the tramcar symbol
5	Illumination requirements: Schedule 17, item 1



953.2 Explanatory plate for the signs shown in diagrams 953 and 953.1

item	
1	Regulations: None
2	Directions: 7, 18, 19
3	Diagrams: 953, 953.1
4	Parmitted variants: None
õ	iliumination requirements: Schedule 17, item 8



954 Buses excluded from restriction or prohibition conveyed by associated sign

ltem	1 2 2
1	Regulations: 22
2	Directions: 7, 19
з	Diagrams: 606, 609, 612, 613, 616, 629, 629, 1
4	Permitted variants: None
5	lliumination requirements: Schedule 17, item 8

SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)





954.1 Same as diagram 954 applying to buses and coaches

Item	
1	Regulations: 22
2	Directions: 7, 19
3	Diagrams: 606, 609, 612, 613, 616, 629, 629.1
4	Permitted variants: The legend may be on three lines
5	Illumination requirements: Schedule 17, Item 8

954.2 Same as diagram 954 applying to local buses

ltem	
i	Regulations: 22
2	Directions: 7, 19
3	Diegrams: 606, 609, 612, 613, 616, 629, 629.1, 952
4	Permitted variants: The legend may be on three lines
5	Illumination requirements: Schedule 17, Item 8



954.3 Same as diagram 954 applying to buses and padal cycles


item	
1	Regulations: 22
2	Directions: 7, 19
3	Diagrams: 606, 609, 612, 513
4	Permitted variants: The word "local" may be added before "buses"
5	Iliumination requirements: Sohedule 17, Item 8




954.4 Same as diagram 954 applying to pedal cycles

tem	
1	Regulations: None
2	Directions: 7, 19
3	Diagrams: 606, 609, 612, 613, 816
đ,	Permitted variants: None
5	liumination requirements: Schedule 17. itam 8

SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)






955 Route for use by pedal cycles only

item		
1	Regulations: None	
2	Directions: 7, 8, 16	
3	Diagrams: 1057	
4	Permitted variants: None	
5	lliumination requirements: Schedule 17, item 3, 7	

956 Route for use by pedal cycles and pedestrians only

ltern	
1	Regulations: None
2	Directions: 7, 8, 10, 16
З	Diegrams: 1057
4	Permitted variants: None
δ	Illumination requirements: Schedule 17, item 3



958 With-flow bus lane ahead

ltem	
1	Regulations: 23, 24
2	Directions: 7, 19
3	Diagrama: 961
4	Permitted variants: The word "taxi" may be omitted. The legend "local" may be omitted or varied to "& coachee".
5	Illumination requirements: Schedule 17, item 4

128


967 Route comprising two ways, separated by the marking shown in diagram 1049 or 1049.1 or by physical means, for use by pedal cycles only and by pedestrians only

Â

(300) 450


(600)


item	
1	Regulations: None
2	Directions: 7, 8, 10, 15, 16, 30
3	Diegrams: 1049, 1049.1, 1057
4	Permitted variants: Symbols may be reversed in a mirror image
5	Illumination requirements: Schedule 17, item 3

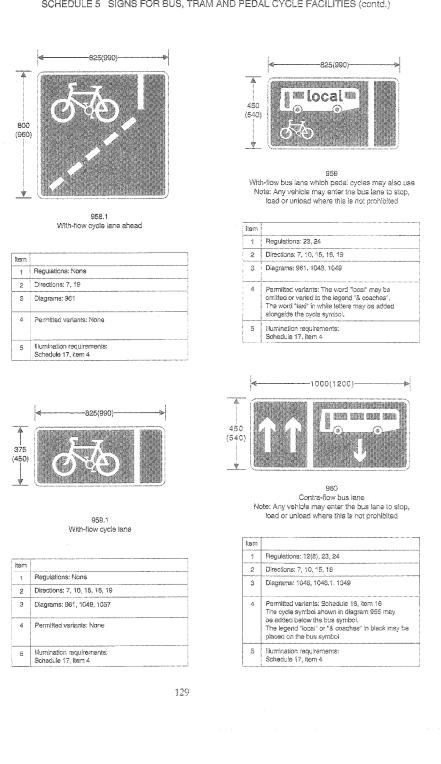

SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)


SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)





960.1 Contra-flow cycle isne

ltem	
1	Regulations: 12(8)
2	Directions: 7, 10, 15, 16
3	Diagrams: 1049, 1057
4	Permitted variants: Schedule 16, item 16
6	Illumination requirements: Schedule 17, Item 4





962 Bus lane on road at junction ahead

item	
1	Regulations: 23, 24
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, items 13, 14, 26, 36 Where the arrow is omitted the word "tene" shall be varied to "tanes". When the arrow is reversed the symbol must be reversed.
6	Illumination requirements: Schedule 17, item 4



962.1 Cycle lane on road at junction ahead or cycle track crossing road

Item	
*	Regulations: None
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedula 15, hems 13, 14, 28, 38 "lane" may be varied to "track". Where the arrow is omitted "lane" shall be varied to "tanes", "track" or "tracks". When the arrow is reversed the symbol must be reversed.
5	litumination requirements: Schedule 17, item 4

SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)



962.2 Contra-flow bus lane which padal cycles may also use on road at junction ahead

Regulations: 23, 24
Directions: 7
Diagrams: None
Permitted variants: Schedule 16, items 13, 14, 28, 38 Where the arrow is omlitted the word "lane" shall be varied to "lanes" and the symbols reversed.
Illumination requirements: Schedule 17, Item 4



963 Bus lane with traffic proceeding from right (Sign for pedestrians)

ltem	
1	Regulations: 23, 24
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, item 28 "RIGHT" may be varied to "LEFT" or "BOTH WAYS". "LANE" may be varied to "LANES".
б	illumination requirements: Schedule 17, item 9



963.2 Contra-flow bus lane which pedal cycles may also use with traffic proceeding from right (Sign for pedestrians)

ltem	
1	Regulations: 23, 24
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Scheduls 16, item 28 "RIGHT" may be varied to "LEFT" or "SOTH WAYS". "LANE" may be varied to "LANES".
5	Illumination requirements: Schedule 17, item 9




983.1 Cycle iane with traffic proceeding from right (Sign for pedestrians)

item	
1	Regulations: None
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, item 28 "RIGHT" may be varied to "LEFT" or "BOTH WAYS". "LANE" may be varied to "LANES" or "TRACK".
5	lilumination requirements: Schedule 17, item 9

94

SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)



963.3 Tramway with traffic proceeding in both directions (Sign for pedestrians)

Permitted variants: "BOTH WAYS" may be varied to "LEFT" or "RIGHT"

ltern 1

3

4

5

Regulations: None 2 Directions: 7 Diagrams: None

illumination requirements: Schedule 17, item 9



964 The end of a bus lane

item	
î	Regulations: 23(1)
2	Directions: 7, 9, 16
з	Diagrams: 1050
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



965 The end of a cycle lane, track or route


itam	
1	Regulations: None
5	Directions: None
3	Diagrams: 1057, 1058
4	Permitted variants: None
6	Illumination requirements: Schedule 17, item 9



966 Pedal cyclists to dismount at the end of, or at a break in, a cycle lane, track or route

ltem	1	
¥	Regulations: None	
2	Directions: None	
3	Diagrams: None	
4	Permitted variants: None	
5	lliumination requirements: Schedule 17, itam 9	

SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)




967 Route recommended for pedal cycles

ltem	
1	Regulations: None
2	Directions: 16
3	Diagrams: 1004, 1004.1, 1057
4	Permitted variants: None
5	filumination requirements: Schedule 17. Item 9




968.1 Same as diagram 968

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9




968 Parking place for pedal cycles

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17. item 9




969 Parking place for buses

ltem	
ş	Regulations: 24(1)
2	Directions: 7, 23
S	Diagrams: 1026.2
4	Permitted variants: None
5	Illumination requirements: Schedule 17, Item 4

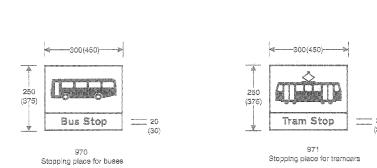


SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)

ltem	
1	Regulations: 22, 24(1)
ŝ	Directions: 36, 37
3	Diagrame: 1025, 1025.1, 1025.2, 1025.3
4	Permitted variants: See note "Bus" may be varied to "Request" "Stop" may be varied to "Stand"
5	illumination requirements: Schedule 17. item 9



ą	Regulations: None
2	Directions: 36, 37
3	Diagrams: None
4	Permitted variants: See note under diagram 970. "Train" may be varied to "Request"
5	lilumination requirements: Schedule 17, item 9

Diagrams 970 - 973.1 Note: Supplementary plates may be added to give additional information



972 Stopping place for buses used for carrying tourists to allow passengers to take photographs


item	
1	Regulations: 24(1)
2	Directions: 36, 37
3	Diagrams: None
4	Permitted variants: See note under diagram 970. Schedule 16, item 37 Times may be omitted
5	Illumination requirements: Schedule 17, item 9



973 Stopping place for buses operated by or on behalf of or under an agreement with London Regional Transport


ltern	
۲	Regulations: 13, 22
2	Diractions: 36, 37
3	Diagrams: 1025, 1025.1, 1025.2, 1025.3
ů,	Permitted variants: See note under diagram 970. The name of the stop may be varied to "BUS STOP" or omtited in which case the orose lars shall be red. The lettering at the bottom of the sign may be omitted or varied to black. The word "STOP" may be varied to "STAND".
5	Illumination requirements: Schedule 17, Item 9

SCHEDULE 5 SIGNS FOR BUS, TRAM AND PEDAL CYCLE FACILITIES (contd.)



973.1 Same as diagram 973

item	
1	Regulations: 13, 22
2	Directions: 36, 37
3	Diagrams: 1025, 1025.1, 1025.2, 1025.3
4	Permitted variants: See note under diagram 970. The words "BUS STOP" may be varied to "REDUEST" or the name of the stop as shown in diagram 979 or omitted. The lattering on the cross bar may be varied to black. The word "REOUEST" on the lower part of the sign may be omitted or varied to "REQUEST STOP" or "BUS STOP".
ö	Illumination requirements: Schedule 17, item 9



974 Stopping by vehicles other than buses prohibited during periods indicated

ltem	
4	Regulations: 22
2	Directions: 7, 22, 23
3	Diagrams: 1025.1, 1025.3
4	Permitted variants: Schedule 16, item 37
5	tliumination requirements: Schedule 17, ilem 9



975 Place where buses may stand and the stopping of other vehicles is prohibited during periods indicated


ltem	
1	Regulations: 22
2	Directions: 7, 22, 23
3	Diagrams: 1025.1, 1025.3
4	Permitted variants: Schedule 16, item 37
5	Numination /equirements: Schedule 17. item 9


SCHEDULE 6

Regulation 11

ROAD MARKINGS


SCHEDULE 6 ROAD MARKINGS Regulation 11







1001 Vehicular traffic must not proceed beyond the line when required to stop by fight signals or by a police constable in uniform or a traffic warden

ltem	
1	Regulations: 28, 33, 38
2	Directions: 18, 42
3	Diagrams: 3000, 3000.1, 3000.2, 3000.3, 3000.4, 3000.5, 3000.6, 3018, 3014
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12







1003 Vehicular traffic must give way in accordance with the requirements of regulation 25

200 (100) 300 (150) 200 (100)

item	
1	Regulations: 4, 10(1), 16, 25, 28
2	Directions: 15, 16
3	Diagrams: 602, 611.1, 615, 1003.4, 1023
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

1003.1 Venicular traffic approaching a roundabout should give way at or immediately beyond the line to vahicular traffic circulating on the carrriageway of the roundabout

ltem	
1	Regulations: 28
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12
	3

SCHEDULE 6 ROAD MARKINGS (contd.)




1003.2 Padestrians approaching a level crossing should wait behind the line when the barriers are closed or when the light signals as shown in diagram 3014 are showing or if there are neither barriers nor light signals until it is safe to proceed

ltem	
1	Regulations: 38
2	Directions: None
3	Diagrams: 3014, 4008
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

1003.3 Vehicular traffic approaching a roundabout with smail central island or approaching a junction marked by signs as shown in diagram 611.1 should give way at or immediately beyond the line to traffic circulating on the carriageway of the roundabout


iem	
1	Regulations: 28
2	Directions: 15, 16
3	Diagrams: 611.1, 1003.4
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)




1003.4 Direction of traffic flow at a junction marked by signs shown in diagram 611.1

ltem	
1	Regulations: 28, 29
2	Directions: 15, 16
3	Diagrams: 602, 511.1, 1003, 1003.3, 1023
á,	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12




1004 Vehicular traffic on roads with a speed limit of 40 mph or less should not cross or straddle the line unless it is safe to do so, and when the line is used in conjunction with the sign in diagram 967 motor vehicles should not enter a cycle iane unless that lane is clear of pedal cycles

Rem	
1	Regulations: 4, 28
2	Directions: None
3	Diagrams: 987, 1057
4	Permitted variants: None
5	illumination requirements: Schedule 17, item 12

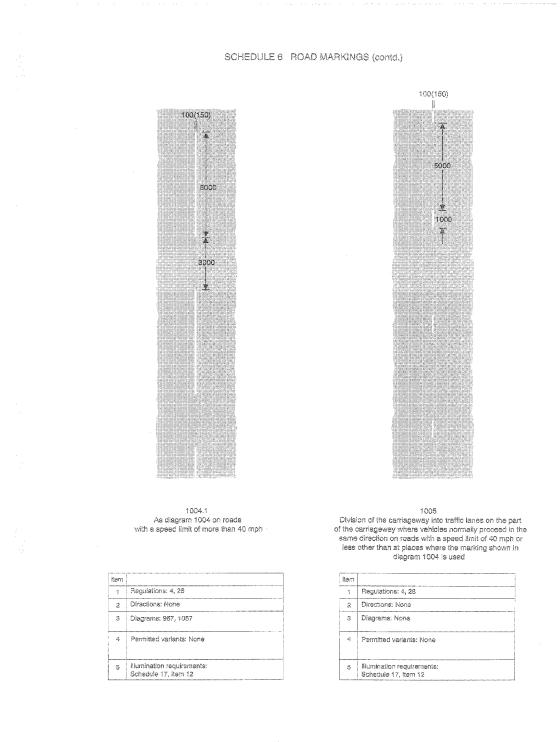

SCHEDULE 6 ROAD MARKINGS (contd.)

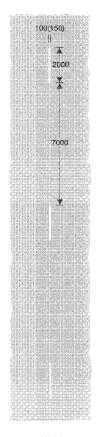

1005.1 As diagram 1005 on roads with a speed limit of more than 40mph other than at places where the marking shown in diagram 1004.1 is used

ltem	
1	Regulations: 4, 28
2	Directions: None
3	Diagrams: None
¢	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12



1008 Division between opposing flows of traffic on a carriageway with a speed limit of 40 mph or less other than at places where the marking shown in diagram 1004 is used

ltern	
1	Regulations: 4, 28
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12


SCHEDULE 6 ROAD MARKINGS (contd.)



1008.1

Division between opposing flows of traffic on a carriageway with a speed limit of more than 40 mph other than at places where the marking shown in diagram 1004.1 is used


ltem	
1	Regulations: 4, 26
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

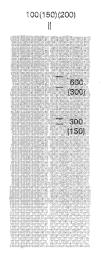

1009

Edge of the carriageway at a road junction, exit from a private drive onto a public road, or where laid diagonally across part of the carriageway, the start of a cycle lane

ltern	
1	Regulations: 4, 12(3), 28
2	Directions: 16
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17 item 12

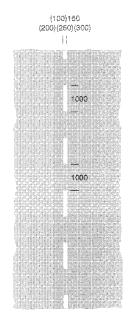

1010

(a) Edge of the carriageway at a road junction, exit from a private drive onto a public road or a lay-by; or

(b) where laid diagonally across part of the carriageway, the start of a traffic lane, the boundary of which is indicated by diagram 1049; or

(c) when used in conjunction with diagram 1014 and 1024.1, the most suitable path for high vehicles through an arch bridge; or

(d) when laid alongside rails used by tramcars, the adge of the part of the carriageway used by the trancars; or

(e) the division between the main carriageway and a traffic lane which leaves the main carriageway at a

junction ahead

SCHEDULE 6 ROAD MARKINGS (contd.)




1012.1

Edge of the carriageway available for through traffic other than at a road junction, an exit from a private drive onto a public road or a lay-by

llem	
1	Regulations: 28
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12


llem	
1	Regulations: 4, 26
2	Directions: 16
3	Diagrams: 1014, 1024.1, 1049
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

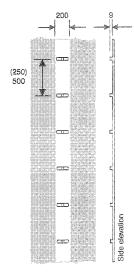




ltern	
1	Regulations: 11(2), 28, 29
2	Directions: 13(1)
3	Diagrams: 1040.3, 1040.5, 1042
4	Permitted variants: The notch may be omitted from the raised rib
5	Illumination requirements: Schedule 17, item 12

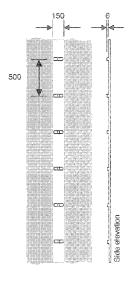


1012.3 As diagram 1012.2 for use on all-purpose roads with hard strips

ltem	
1	Regulations: 11(2), 28, 29
2	Directions: 12(3)
3	Diagrams: 1040.3, 1040.5
4	Permitted variants: The notch may be cmitted from the raised rib The width of the line shall be increased to 200 millimetres when used on all-purpose roads with hard shoulders
5	Illumination requirements: Schedule 17, item 12




SCHEDULE 6 ROAD MARKINGS (contd.)

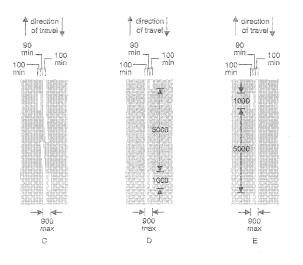



ltern	
1	Regulations: 4, 10(1), 10(2), 26, 28
2	Directions: 43
3	Diagrams; 1014
4	Permitted variants: None
ő	Illumination requirements: Schedule 17, item 12



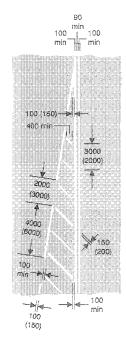


1013.3

As diagram 1013.1, with an adjacent part of the carriageway which vehicular traffic should not enter unless it is seen by the driver to be safe to do so

ltam	
1	Regulations: 4, 10(1), 10(2), 12(4), 26, 28
2	Directions: 43
3	Diagrams: 1014
4	Permitted variants: None
5	Illumination requirements: Schedule 17, Item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

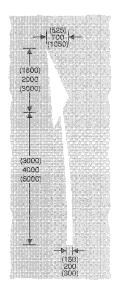

1014

- (a) Direction in which vehicular traffic should pass a road marking shown in diagram 1013.1, 1013.3, 1040, 1040.3, 1040.4 or 1049 ahead; or
- (b) obstruction on the carriageway ahead; or
- (c) when used in conjunction with the marking shown in diagram 1010, the most suitable path for high vehicles through an arch bridge

ltem	
1	Regulations: 28
2	Directions: 16, 43
3	Diagrams: 1010, 1013.1, 1013.3, 1024.1, 1040, 1040.3, 1040.4, 1049
4	Permitted variants: The symbol may be reversed in a mirror image
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)



1017 Walting of vehicles on a side of a length of road prohibited for a time less than that specified in the capiton to diagram 1018.1

ltem	
1	Regulations: None
2	Directions: 7, 20, 22, 23
3	Diagrams: 637.2, 639, 639.1A, 640, 663, 663.1, 864, 1060, 1080.1, 1061, 1061.1
4	Permitted variants: None
5	filumination requirements: Schedule 17, item 12



1018.1 Walting of vehicles on a side of a length of road prohibited at any time during a period of at least 4 consecutive months


item	
1	Regulations: None
2	Directions: 7, 20, 22, 23
з	Diagrams: 637, 637.2, 637.3, 642.3, 663, 663.1, 664, 1060, 1060.1, 1061, 1061.1
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

Edge of carriageway		250 (300)
	1019	


Loading or unloading of vehicles on a slde of a length of road prchibited for a time less than that specified in the caption to diagram 1020.1

ltern	
1	Regulations: None
2	Directions: 7, 21, 22, 23
3	Diagrams: 637.2, 638.1, 640, 663, 663.1, 664
4	Permittad variants: None
5	Illumination requirements: Schedule 17, item 12



1022 Approach to a road junction at or near which is placed the sign shown in diagram 601.1 and the road marking shown in diagram 1002.1


tem	
1	Regulations: 28
2	Directions: 15, 18
3	Diagrams: 601.1, 1002.1
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12



1020.1

Loading or unloading of vehicles on a side of a length of road prohibited at any time during a period of at least 4 consecutive months


item	
۲	Regulations: None
2	Directions: 7, 21, 22, 23
3	Diagrams: 637.2, 638, 642.3, 663, 663.1, 664
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12



1023 Approach to a road junction at or near which is placed the marking shown in diagram 1003 or both the marking shown in diagram 1003 and the sign shown in diagram 602


item	
i	Regulations: 25, 28
2	Directions: 15, 16
3	Diagrams: 602, 511.1, 1003, 1003.4
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)



1024 Vehicular traffic should proceed with caution because of potential danger ahead


item	
1	Regulations: 28
2	Directions: None
3	Diagrame: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12



1024.1 Path to be taken by high vehicles through an arch bridge or the route to avoid a low bridge


item	
1	Regulations: 28
2	Directions: 16
3	Diagrams: 1010, 1014
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

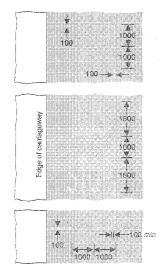

1025 Stopping place for buses on part of the carriageway also used by through traffic

ltem	
1	Regulations: 22
2	Directions: None
3	Diegrams: 970, 973, 973.1
4	Permitted variants: "STOP" may be varied to "STAND"
5	Illumination requirements: Schedule 17, item 12

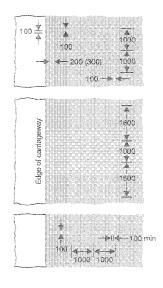

1025.1 As diagram 1025 where other vehicles are prohibited from stopping at certain times

ăem	
1	Regulations: 22
2	Directions: 7, 20, 22, 23
3	Diagrams: 970, 973, 973.1, 974, 975
4	Permitted variants: Same as diagram 1025
5	illumination requirements: Schedule 17, item 12


SCHEDULE 6 ROAD MARKINGS (contd.)


1025.2 Stopping place for buses in a lay-by

Item	
1	Regulations: 22, 28
2	Directions: None
3	Diagrams: 970, 973, 973.1
4	Permitted variants: Same as diagram 1025 The shape of the marking may be varied
5	Illumination requirements: Schedule 17, item 12

and the second second


SCHEDULE 6 ROAD MARKINGS (contd.)

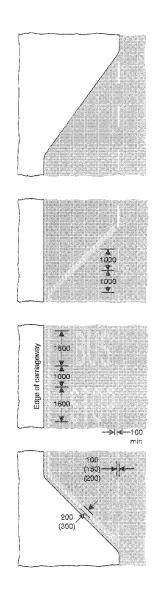




ltem	
1	Regulations: 22, 28
2	Directions: 7, 20, 22, 23
3	Diagrams: 970, 973, 973.1, 974, 975
4	Permitted variants: Same as diagram 1025.2
5	litumination requirements: Schedule 17, item 12


SCHEDULE 6 ROAD MARKINGS (contd.)

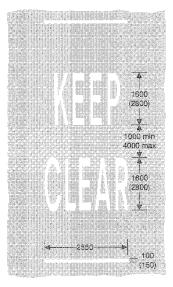

1026 Part of the carriageway which should be kept clear of stationary vehicles

item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: The white line indicating the extent of the area to be kept clear may be omitted
5	ilumination requirements: Schedule 17, item 12






1026.1 Part of the carriageway outside an entrance to off-street premises, or where the kerb is dropped to provide a convenient crossing place for pedestrians, which should be kept clear of stationary vehicles

item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, Item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

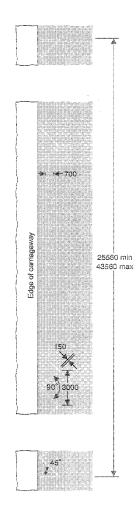


1027.1 Part of the carriageway outside a school entrance which should be kept clear of stationary vehicles


item	
1	Regulations: None
2	Directions: 20, 22
3	Diagrams: 642.2
4	Permitted variants: The word *SCHOOL* shall be omitted and the minimum length of the marking reduced to 25250 millimetires when used outside a fire, police or ambulance station
5	Illumination requirements: Schedule 17, item 12

153

SCHEDULE 6 ROAD MARKINGS (contd.)

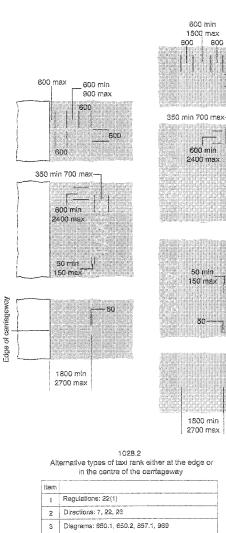


2	Directions: 7, 22, 23
3	Diagrams: 650.1, 650.2, 857.1, 969
4	Permitted variants: The number of times the word "TAXIS" is shown may be varied eccording to the length of the marking, "TAXIS" may be varied to: 1. "BUSES" 2. "COACHES" 3. "POLICE" 4. "AMBULANCES"
5	Illumination requirements: Schedule 17, item 12

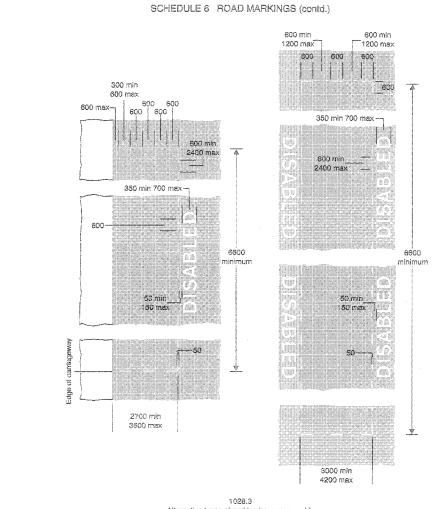


Alternative types of parking beys reserved for disabled badge holders either at the edge or in the centre of the carriageway

ltem	
4	Regulations: None
2	Directions: 7, 22, 23
3	Diagrams: 660, 660.4, 661
4	Permitted variants: The number of times the word "DISABLED" is shown may be varied according to the length of the marking "DISABLED" may be omitted or varied to: 1. "LARGE OP SLOW VEHICLES ONLY" 2. "LOADING ONLY"
5	litumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

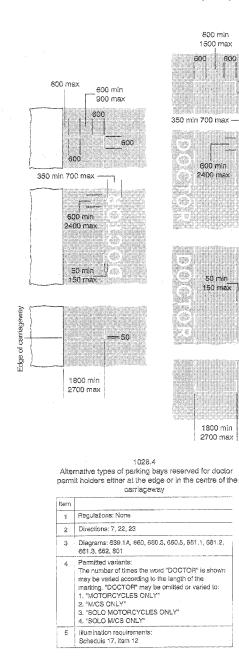


SCHEDULE 6 ROAD MARKINGS (contd.)

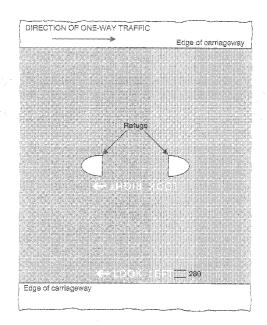

1028 Direction in which pedestrians should icck for approaching traffic

ltem	
1	Regulations: None
2	Directions: None
З	Diagrams: None
4	Parmitted varianis: None
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

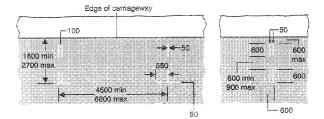


1032

Designated parking place (Longitudinal marking)

item	
1	Regulations: None
2	Directions: 7, 22
3	Diagrams: 660.5, 661.2, 661.3, 662
4	Permitted variants: The number of individuel parking spaces may be extended as necessary The double transverse lines are only to be used at the end of a block of parking places
5	Illumination requirements: Schedule 17, item 12


SCHEDULE 6 ROAD MARKINGS (contd.)

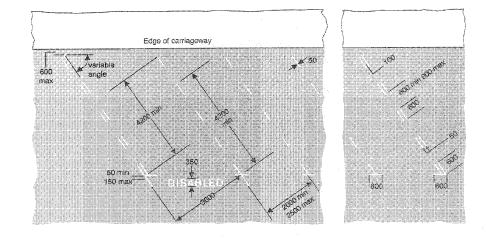

1033 Echelon parking spaces subject to such conditions, if any, as may be in force

ltem	
1	Regulations: None
2	Directions: 7, 22, 23
з	Diagrams: 639.1A, 660, 660.3, 660.4, 660.5, 661, 661.1, 661.2, 661.3, 662, 801
4	Permitted variants: "DISABLED" and the associated bay may be omitted Additional "DISABLED" bays may be provided
5	Illumination requirements: Schedule 17, item 12


SCHEDULE 6 ROAD MARKINGS (contd.)

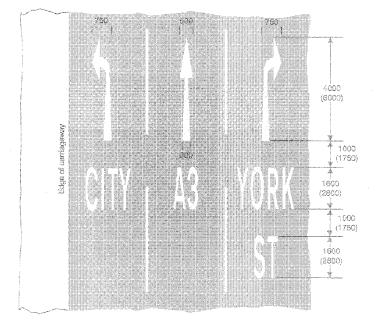


1035 Appropriate traffic lanes for different destinations

item	
1	Regulations: 12(4), 27, 28
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, item 19 Arrows may be omitted
5	lilumination requirements: Schedule 17, Item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

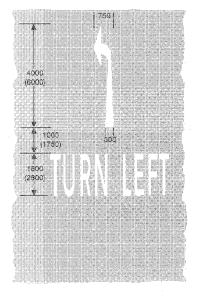


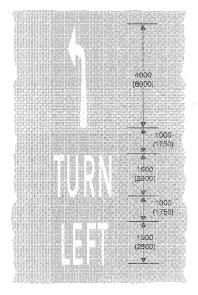



1036.1 Vehicular traffic must turn left (Alternative types)

item	
1	Regulations: 12(4), 28
2	Directions: 7
3	Diagrams: None
4	Permitted variants: None
ő	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

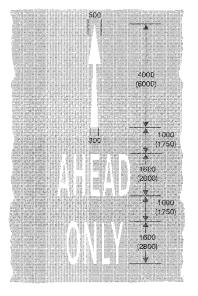


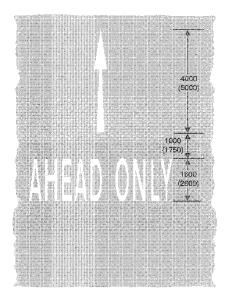




ltem	
4	Regulations: 12(4), 29
2	Diractions: 7
2	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

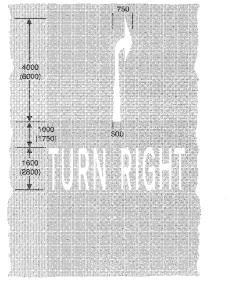

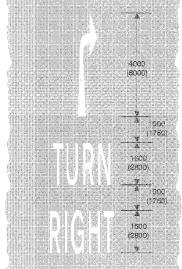

1037.1 Vehicular traffic must turn right (Alternative types)

item	
1	Regulations: 12(4), 28
2	Directions: 7
3	Diagrams: None
Ĕ,	Permitted variants; None
5	Illumination requirements: Schedule 17, item 12

and the second second

SCHEDULE 6 ROAD MARKINGS (contd.)

1038

Appropriate traffic lanes for different manoeuvres (Longitudinal marking)

liem	
٦	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Direction of the arrow heads may be varied, but no arrow shall show more than two directions
5	Illumination requirements: Schedule 17, Item 12




1039

Place where traffic streams divide or bifurcate (Longitudinal marking)


ltem	
1	Regulations: 28
2	Directions: None
8	Diagrams: None
4	Permitted variantst Schedule 16, item 28
5	lliumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

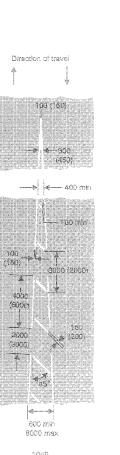

1040 Part of the carriageway which vehicular traffic should not enter unleas it is seen by the driver to be safe to do so

ltəm	
1	Regulations: 4, 12(4), 28
2	Directions: 6
3	D'agrams: None
Ģ	Permitted variants: The boundary line may be varied to a continuous white line when the marking is on a part of the carriageway which traffic should not enter except in an emergency
3	Blumination requirements: Schedule 17, Item 12

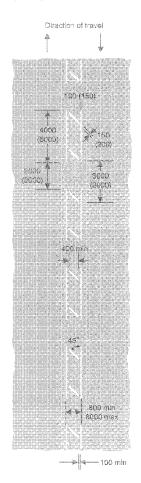


1040,2 Length of road along which drivers should not overlake by pessing through the marking unless it is seen by the driver to be safe to do so

)tem	
ť	Regulations: 4, 12(4), 28
2	Directions: 6
Э	Diagrams: Norie
4	Permitred variants: Same as diagram 1040
5	Numination requirements: Schoulde 17, Rem 12




SCHEDULE 6 ROAD MARKINGS (contd.)

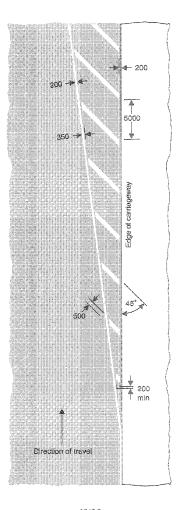

1040.3 Reduction in number of lanes on a motorway or all-purpose dual carriageway

ltern	
٦	Regulations: 28
2	Directions: None
3	Diegrams: 1012.2, 1012.3, 1014
4	Permitted variants: The width of the longitudinal line may be varied to 150 millimetras when used on an all-purpose road
5	Illumination requirements: Schedule 17, item 12

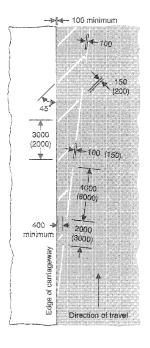


1040.4

Part of the carriageway adjacent to the edge which vehicular traffic should not enter unless it is seen by the driver to be safe to do so


ltem	
1	Regulations: 12(4), 28
2	Directions: None
з	Diagrams: 1014
4	Permitted variants: The angle of the hatching shall be reversed when the marking is used on the off-side of the carriageway
5	Illumination requirements: Schedule 17, item 12


SCHEDULE 6 ROAD MARKINGS (contd.)

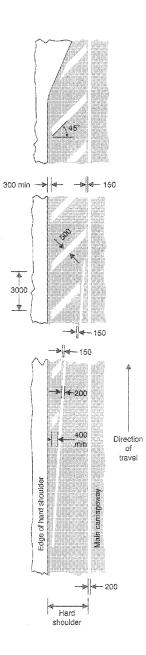

1040.5 End of hard shoulder


Item	
1	Regulations: 28
2	Directions: None
3	Diagrams: 1012.2, 1012.3
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12



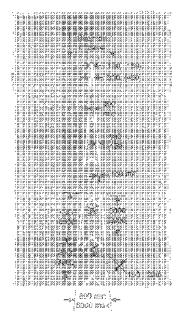

ipst Part of the carriagenear where vehicular traffic passes in the same diraction or, both river of the marking, and should not amor the and covered by the marking unities in stem by the involter to be be to do set


ie-n	· · · · · · · · · · · · · · · · · · ·
1	Regulational (C(4), 26
0	Circebes Nora
~	Pragos no Anas
	Parmities statistics The discription of the previous shall be transfer the discription of traces is in the opposite short th

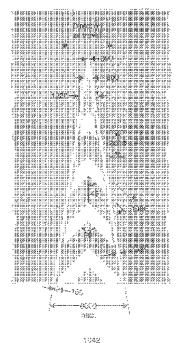


Part of the renge of all environments to the motionaus between the claim incluring listing wave and an centegraphy of a ske rule, or a line server who control genue of motionary wave installation and the must and antial enough in an emergency

5	Seguiations, 20	
τ	DE005018, 13(1)	
G	Discharts - 01016	
2	Permitted use acres	
	Sama as 2 agrim 1999	
s	Summation recollectants	:
	Schudule 17 frem 12	

SCHEDULE 6 ROAD MARKINGS (contd.)

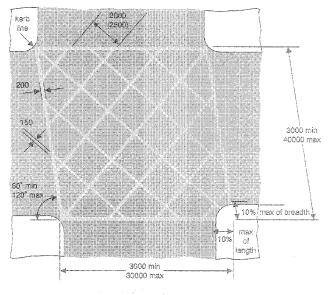

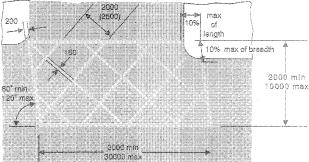

1044


1043

Area of carriageway at a junction, other than a roundabout, which vehicles must not enter in a manner which then causes any part of the vehicle to remain stationary within that area due to the presence of stationary remain stationary within that area due to the presence of stationary vehicles, except that vehicles waiting to complete a right turn may remain stationary within the area for so long as prevented from completing that turn by reason either of encoming vehicles or of the presence of other stationary vehicles waiting in or near that area to complete a right turn. When the markings are used with the signs shown in diagrams 615 and 611 on an area of carriageway, the width of which is less than 4.5 metres at any point, vehicles must not enter the marked area in a manner which then causes any part of the vehicle to remain stationary within that area fue to the presence of noncoming vehicles or other stationary within that area fue to the presence of noncoming vehicles or other stationary webcles. due to the presence of oncoming vehicles or other stationary vehicles beyond the area. (Alternative types)

item	
1	Regulations: 10(1), 12(11)
2	Directions: None
3	Diagrams: 615, 811
4	Permitted variants: Any corner may be out away as shown. The out-away corner may be completed in the same manner as the other corners. Parts of the marking may be ontitled where tram tracks cross the marking or to indicate the edge of the path taken by a trancer.
5	Numination requirements:

Numination requirements Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

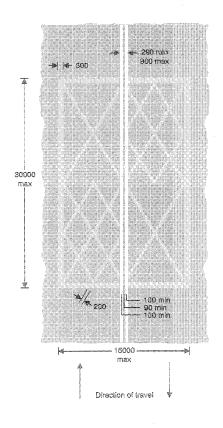


1045 Area of carriageway at a level crossing which vehicles must not enter in a manner which then causes any part of the vehicle to remain at rest within the marked area due to the presence of stationary vehicles

ltem	
١	Regulations: 10(1)
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)






1046 "No entry" for vehicular traffic (Atemative types)

ltem	
1	Regulations: 28
2	Directions: 7
3	Dlagrams: 616, 617 with 618
4	Permitted variants: "NO ENTRY" may be varied to "PLAY STREET"
5	litumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)



1600 1


1048 With-flow lane reserved for buses and other vehicles as indicated on the sign shown in diagram 959 or a contra-flow lane reserved for buses

tem	
1	Regulations: 23
2	Directions: 7, 15, 16
З	Diagrams: 959, 960, 1049
¢	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

1048.1 Contra-flow lane reserved for buses and pedal cycles

ltem	
1	Ragulations: 23
2	Directions: 7, 15, 16
3	Diagrams: 960 when varied to include the cycle symbol, 1049
4	Permitted variants: None
5	Illumination requirements: Schedule 17, Item 12


SCHEDULE 6 ROAD MARKINGS (contd.)

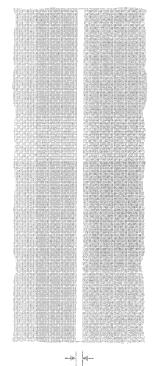

(150) 250 (300)

1049 Boundary of a bus lane or a cycle lane. Where varied to 150mm wide and used in conjunction with the sign to diagram 957, the division of a route into that part reserved for padal cycles and that part reserved for pedestrians

kem	
1	Regulations: 4, 28
2	Directions: 7, 15, 16, 30
з	Diagrams: 957, 959, 959.1, 960, 960.1, 1010. 1014, 1048. 1048.1, 1050, 1057, 1058
4	Permitted variants: None
5	liumination regularments: Schedule 17, liem 12

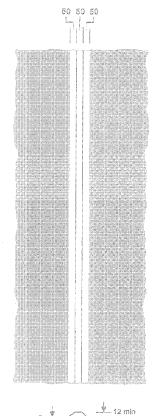




1049,1 Division of a route into that part reserved for pedal cycles and that part reserved for pedestrians

ltem	
1	Regulations: 11(2), 29(2)
2	Directions: 7, 16, 30
3	Diagrams: 957, 1057, 1058
4	Permitted variants: None
5	Ibumination requirements: Schedule 17, item 12

and a second second


SCHEDULE 6 ROAD MARKINGS (contd.)

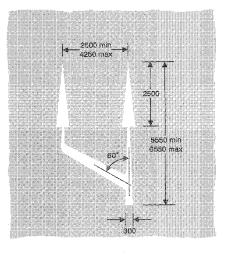

1050 Direction of possible traffic movements at the end of a bus lane

item	
1	Regulations: None
2	Directions: 7, 16
з	Diagrams: 964, 1049
4	Permitted variants: The left hand arrow head may indicate a left turn in the manner shown in diagram 1036.1
5	Illumination requirements: Schedule 17, item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

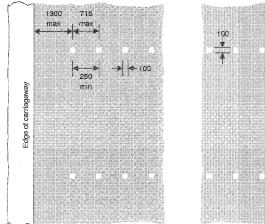

1055

Pedestrian crossing at which traffic is subject to control by a police constable in uniform or a traffic warden, being control which is normally in operation during periods amounting in the aggregate to not less than 20 hours in any week, or the most suitable place for pedestrians to cross a carriageway within 10 metres of light signals as shown in diagram 3000, or in that diagram as varied by regulation 31, or in that diagram in conjunction with the signals shown in diagram 4002


item	
١	Regulations: 11(4)
2	Directions: None
3	Diagrams: 3000, 3000.2, 3000.3, 3000.4, 3000.5, 3000.6, 4002
4	Permitted variants: The square marks may be varied to circular ones with a diameter of 100mm. The number of marks shall be varied according to the width of the road.
5	Illumination requirements: Schedule 17, item 12



Document Generated: 2023-07-10

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE 6 ROAD MARKINGS (contd.)




1057 Cycle lane, track or route


ltem	
1	Regulations: None
2	Directions: 15, 16
3	Diagrame: 955, 956, 957, 959.1, 960.1, 965, 967, 1004, 1004.1, 1049, 1049.1, 1058, 1059
4	Permitted variants: Schedule 16, item 28
õ	Illumination requirements: Schedule 17, item 12

1058 End of a cycle lane, track or route


ltem 1 Regulations: None 2 Directions: 16 3 Diagrams: 965, 1049, 1049.1, 1057 Permitted variants: None 4 lliumination requirements: Schedule 17, item 12 5

SCHEDULE 6 ROAD MARKINGS (contd.)






ltem	
1	Regulations: None
2	Directions: 16
8	Diagrams: 1057
4	Permitted variants: The arrow pointing to the left may be reversed to point to the right
5	illumination requirements: Schedule 17, item 12

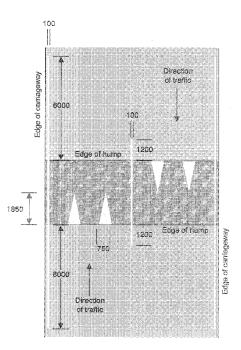


1060 Road hump with a round top extending across the whole width of the carriageway


Item	
1	Regulations: 28
2	Directions: 15, 18
3	Diagrams: 557.1 1017, 1018.1
4	Permitted variants: The longitudinal line adjacent to the edge of the carriageway may be omitted when diagram 1017 or 1018.1 Is used. Where more than one traffic lane is available to traffic proceeding in the same direction the longitudinal white line shall be placed between each traffic lane and the two triangular white markings shall be placed on each traffic lane. Where traffic is permitted to proceed in one direction only across the road hump, the triangular white markings shall only be placed on the side of the road hump facing traffic approaching the road hump.
ô	Illumination requirements: Schedule 17. item 12

SCHEDULE 6 ROAD MARKINGS (contd.)

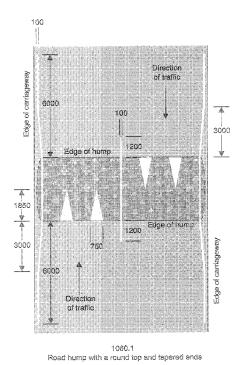




item	
1	Regulations: 28
2	Directions: 15, 16
3	Diagrams: 557.1, 1017, 1018.1
4	Permitted variants: Same as diagram 1060
5	Illumination requirements: Schedule 17, item 12

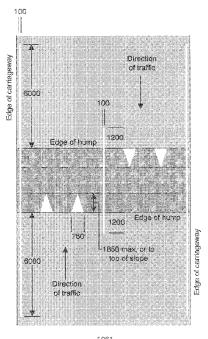

¹⁰⁶¹ Road hump with a flat top extending across the whole width of a carriageway


ltem	
1	Regulations: 28
2	Directions: 15, 16
з	Diagrams: 557.1, 1017, 1018.1
4	Permitted variants: Same as diagram 1080
5	Illumination requirements: Schedule 17, item 12


SCHEDULE 6 ROAD MARKINGS (contd.)

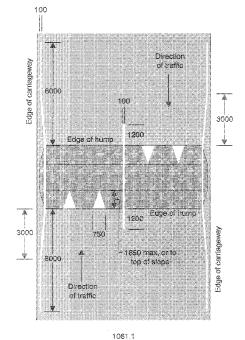

Road hump with a flat top and tapered ends

ltem	
1	Regulations: 28
2	Directions: 15, 16
3	Diagrams: 657.1, 1017, 1018.1
4	Permitted variants: Same as diagram 1060
5	Illumination requirements: Schedule 17, item 12





1083 Limits of a measured length of road for assessing the speed of vehicular traffic by a police constable (Alternative types)

 Hem

 1
 Regulations: None

 2
 Directions: 34(2)

 3
 Diagrams: None

 4
 Permitted variants: None

 5
 Illumination requirements: Schedule 17, Item 12


SCHEDULE 7

Regulation 11(1)


PART I

PRIMARY ROUTE DIRECTIONAL SIGNS

SCHEDULE 7 PART 1 PRIMARY ROUTE DIRECTIONAL SIGNS Regulation 11(1)

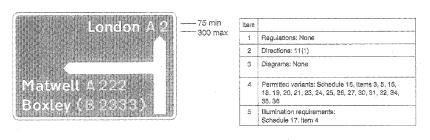


2001 Junction shead of two primary routes

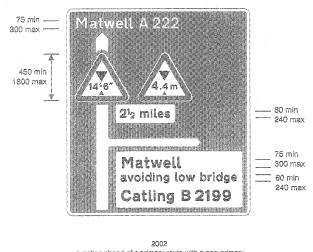

Junction ahead of a primary route with a non-primary route which is the recommended alternative route avoiding a low bridge on the primary route

ltem	
1	Regulations: None
2	Directions: 11(1)
8	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 18, 19, 20, 21, 23, 24, 25, 26, 27, 30, 31, 32, 34, 35, 36
5	Illumination requirements: Schedule 17, item 4


SCHEDULE 7 PART I PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

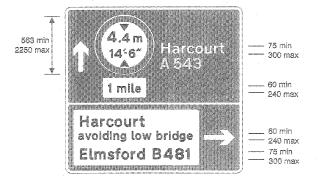


2003 Same as diagram 2002


ltem	· · ·
1	Regulations: None
2	Directions: 7, 11(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 12, 16, 19, 20, 21, 23, 24, 25, 26, 27, 29, 30, 31, 32, 34, 35, 36
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 7 PART I PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

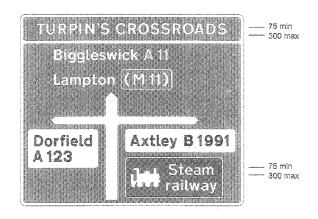



ltem	
1	Regulations: None
2	Directions: 11(1)
з	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 18, 19, 20, 21, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 36 Junction name may be omitted or shown on 2 lines.
5	Numination requirements: Schedule 17, item 4

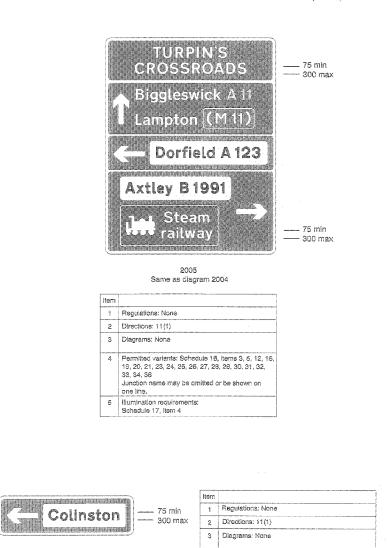


SCHEDULE 7 PART I PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

2006 4 F Junction ahead with a non-primary route 5 II S


 4
 Permitted variants: Schedule 16, Items 3, 5, 12, 19, 20, 23, 24, 25, 26, 27, 30, 31, 32, 34

 5
 Illumination requirements: Schedule 17, Item 4

SCHEDULE 7 PART I PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

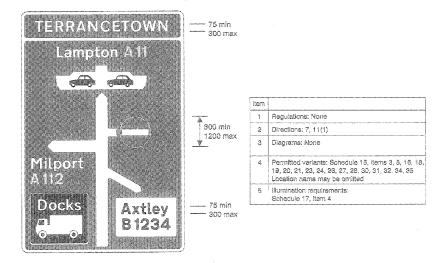

2007 Staggered junctions ahead batween a primary route leading to a car ferry, a primary route which is the recommended route for goods vehicles to take to the docks, a non-primary route and a road to which entry is prohibited, in the village, town or suburb whose name is indicated at the top of the sign

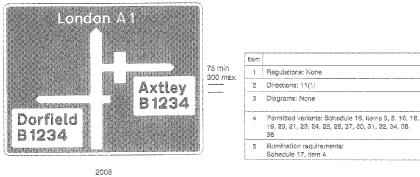


Staggered junction ahead at which a dual carriageway primary route is crossed by a non-primary route



2009 Gyratory system ahead on a primary route which has junctions with a non-primary route and with another road along which there is a prohibition on vehicle entry at a specified distance from the junction


ltem	
1	Regulations: None
2	Directions: 7, 11(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 18, 19, 20, 21, 23, 24, 25, 26, 27, 30, 31, 32, 34, 35, 36
5	Illumination requirements: Schedule 17, Item 4

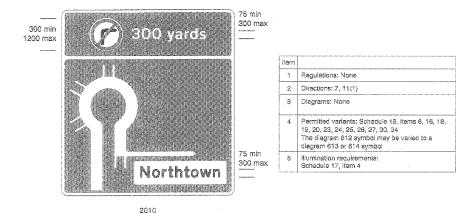


Distance to a prohibited movement and direction to the destination shown, avoiding that prohibition

185

SCHEDULE 7 PART I PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

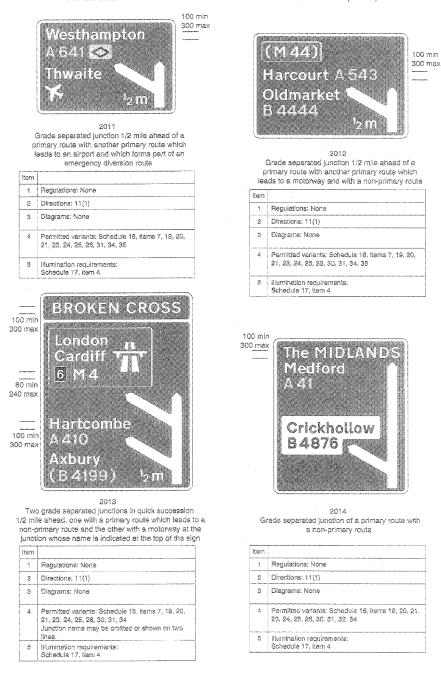



SCHEDULE 7 PART | PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

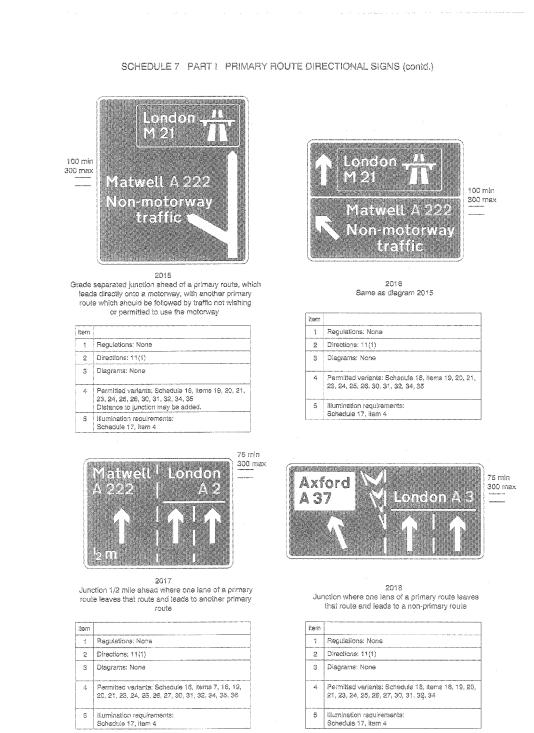

187


.

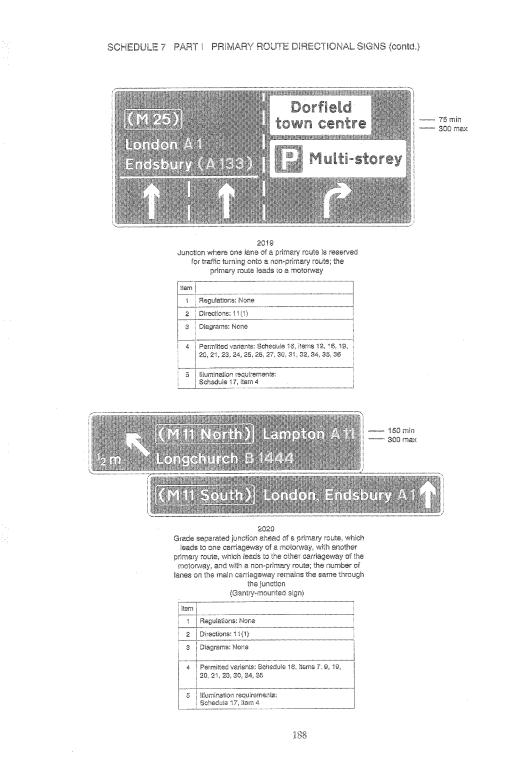


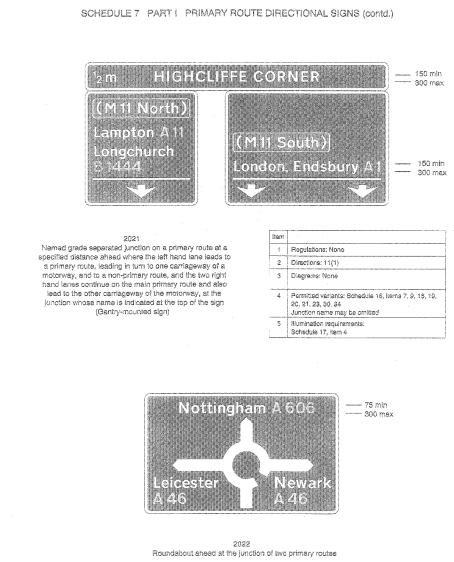

item	
١	Regulations: None
2	Directions: 11(1)
8	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 18, 19, 20, 21, 23, 24, 25, 26, 27, 30, 31, 32, 94, 85, 36
5	Illumination requirements: Schedule 17, Item 4

SCHEDULE 7 PART | PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

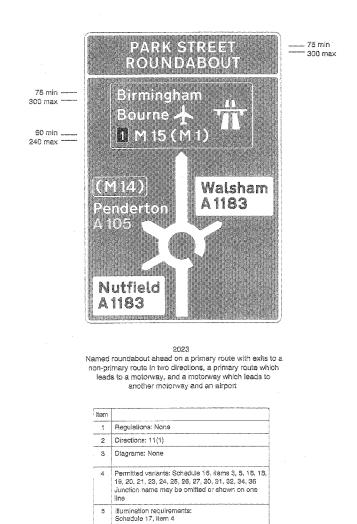

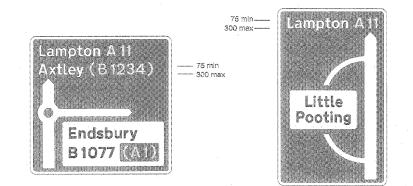

SCHEDULE 7 PART I PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

2024 Mini-roundabout ahead with exits to a primary route, leading to a non-primary route, and a non-primary route, leading to another primary route

ltem	
1	Regulations: None
2	Directions: 11(1)
3	Diagrame: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 16, 19, 20, 21, 23, 24, 25, 26, 27, 30, 31, 32, 34, 35, 36
â	lilumination requirements: Schedule 17, item 4



2026 Direction to a primary route which leads to a motorway and a non-primary route

item	
1	Regulations: None
2	Directions: 11(2)
з	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 15, 19, 20, 21, 24, 25, 26, 30, 31, 32, 34
5	tilumination regul/ements: Schedule 17, Item 4


2025 Junction absad of a primary route with a non-primary route through a town or village that has been by-passed


ltem	
1	Regulations: None
2	Directions: 11(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 18, 19, 20, 21, 23, 24, 31, 32, 34, 35
5	lliumination requirements: Sohedule 17, item 4



2027 Direction to a primary route along which there is a low bridge

ltem	
1	Regulations: None
2	Directions: 11(2)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 15, 19, 20, 21, 24, 25, 26, 29, 30, 31, 32, 34
5	filumination requirements: Schedule 17, Item 4

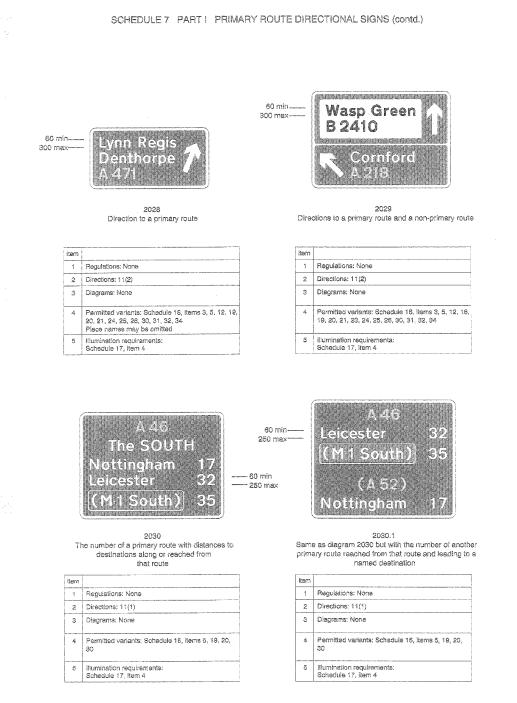


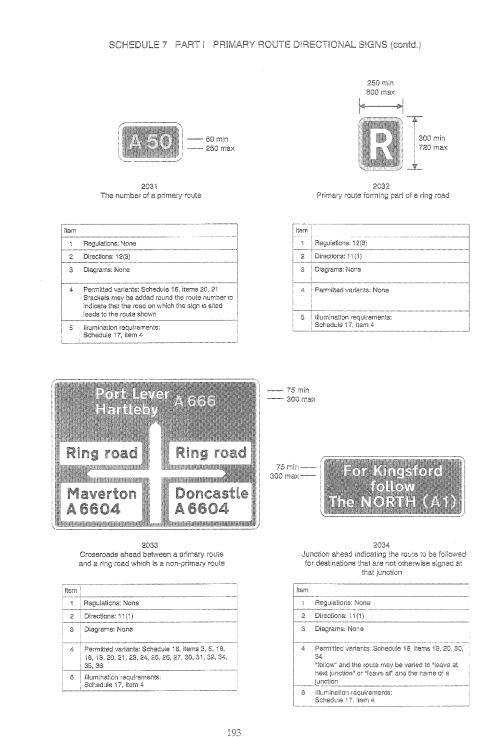


Regulation 11(1)

PART II

NON-PRIMARY ROUTE DIRECTIONAL SIGNS

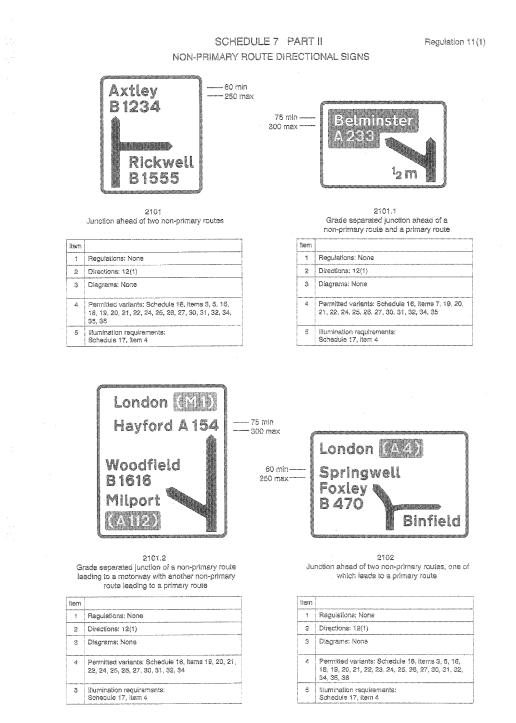

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

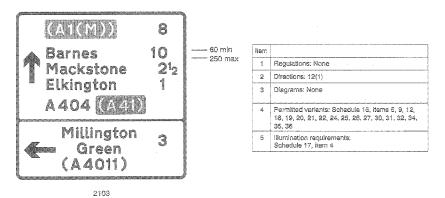

Junction ahead of two non-primary routes, one of which leads to a primary route and a motorway


2104 Junction ahead of a non-primary route with a


motorway at the junction whose number is specified

item	
1	Regulations: None
2	Directions: 12(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 18, 19, 20, 21, 22, 24, 25, 26, 27, 30, 31, 52, 54, 35, 36
5	Illumination requirements: Schedule 17, item 4

Debworth A4408


SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

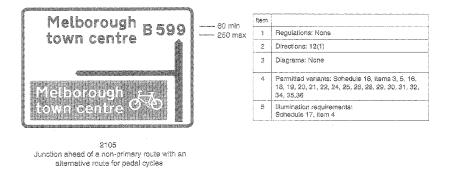

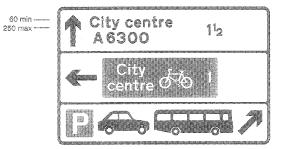


2106 Junction shead of a non-primary route with an alternative route for pedal cycles and a route leading to parking for cars and buses

item	
4	Regulations: 24(1)
2	Directions: 12(1)
з	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 9, 12, 16, 19, 20, 21, 22, 24, 25, 26, 29, 29, 30, 31, 32, 34, 35, 36
5	Illumination requirements: Schedule 17, item 4

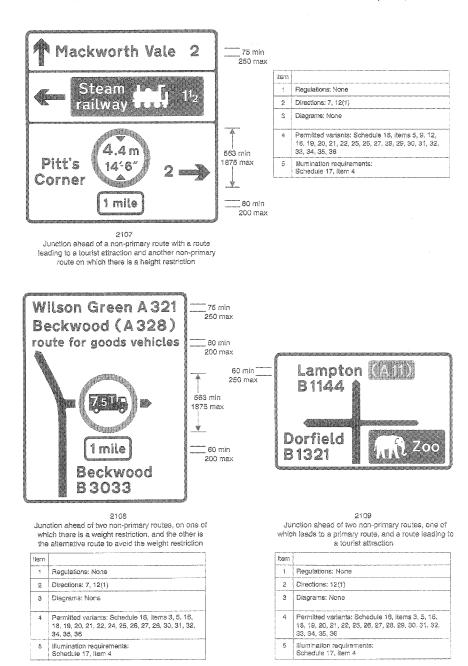

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)



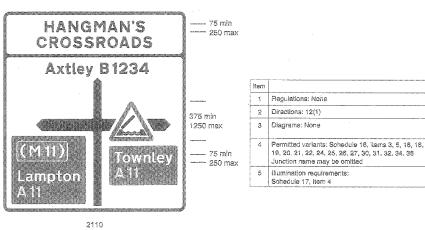

– 75 min

375 min

Junction at named crossroads ahead of a non-primary route with a primary route, on which in one direction there is a lifting bridge and which in the other direction leads to a motorway

Axtley B1234

MID


lownley

Lampton A1

------ 250 max ltem 1 Regulations: None Directions: 12(1) 2 3 Diagrams: None Permitted variants: Schedule 16, items 3, 5, 12, 16, 19, 20, 21, 22, 24, 25, 26, 27, 29, 30, 31, 32, 34, 4 35, 38 5 Illumination requirements: 1250 max Schedule 17, item 4

2111 Junction at crossroads ahead of a non-primary route with a primary route, on which in one direction there is a lifting bridge and which in the other direction leads to a motorway

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

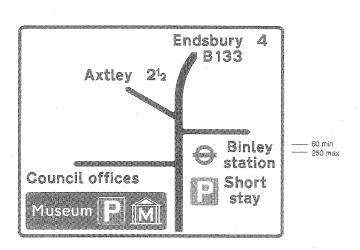


2112


Staggered junctions ahead between four non-primary routes leading to various destinations including parking for a tourist attraction, short stay parking and a London Regional Transport railway station

ltem	
1	Regulations: None
2	Directions: 12(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 9, 16, 18, 19, 20, 21, 22, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 38
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

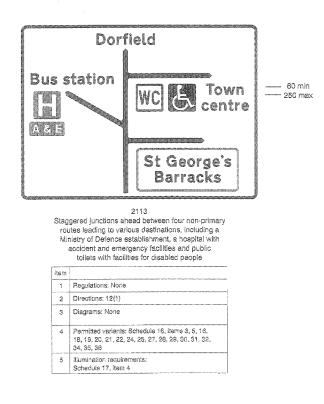

200

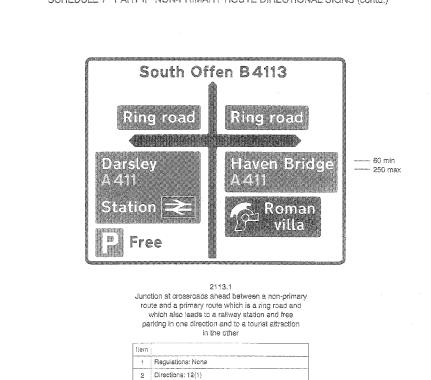


Permitted variants: Schedule 16. items 3, 5, 16, 18, 19, 20, 21, 22, 25, 26, 27, 26, 29, 30, 31, 32, 33, 34, 35, 36

SCHEDULE 7 PART IL NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

201

3 Diagrams: None

5 Illumination requirements: Schedule 17, item 4

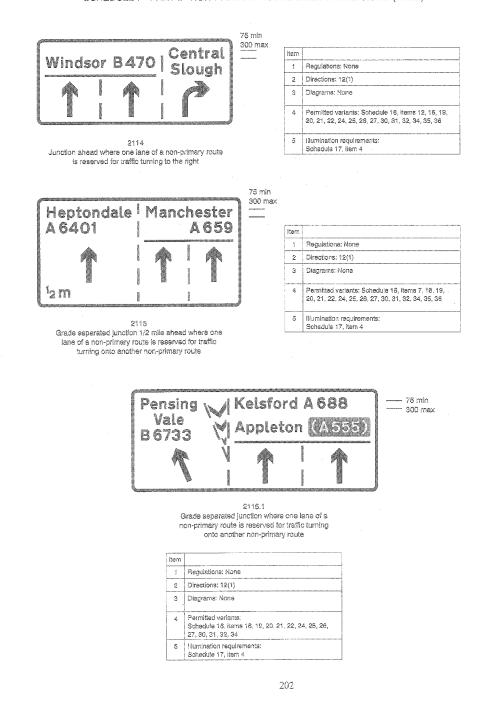


SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)


SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)


'2 m ` 💊	London	Δ4	Spring	well, Foxley B	470 = 150 m	
	The WE	EST	(A 4) E	Ikington, Har	tcombe A42	207 个
		rout	es, both of which le mber of lanes on th the same th	2116 ton ahead of two non-primary sead to a primary route and the re main carriageway remains nrough the junction -mounted sign)		
		item	I			
		1	Regulations: None	· · · · · · · · · · · · · · · · · · ·		
		2	Directions: 12(1)			
		3	Diagrams: None			
		4	Permitted variants: 21, 22, 30, 34, 35	Schedule 18, Items 7. 9, 19, 20,		
		5	litumination require	ments:		
			Schedule 17, item 4	4		
	Hondon Spring Foxley		B 470	The WES Elkingtor Hartcom		150 min 300 ma:
			8			5
¹ 2 m		V	r			
¹ 2 m		of a no which in	n-primary route lead turn leads to a pri- lead along the mai (Gantry Regulations: None Directions: 12(1) Diagrams: None	2117 n ahead where the left hand lar dats to another non-primary rou imary route and the two right h n route to another primary rout -mounted sign) Schedule 16, litems 7, 9, 16, 19,	ie, and	- Antonio anto



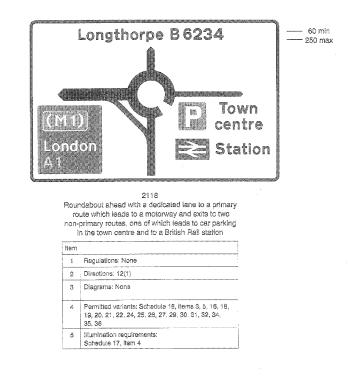

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

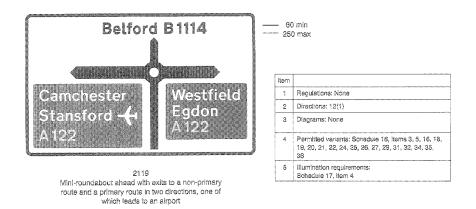


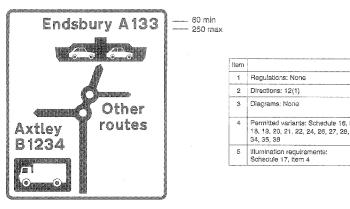

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

2120 Double mini-roundabout ahead with exits to three non-primary routes, one of which leads to a car ferry and another is an advisory lorry route



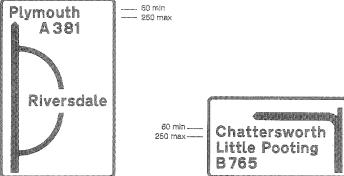

2121 Junction ahead of a non-primary route with another non-primary route leading to a town or village that has been bypassed

item	
1	Regulations: None
2	Directions: 12(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 16, 19, 20, 21, 22, 24, 31, 32, 34, 35
5	illumination requirements: Schedule 17, item 4



2122 Sharp bend in main route at a junction ahead with a minor road

ltem	
1	Regulations: None
2	Directions: 12(1)
3	Diagrams: None
Ą	Permitted variants: Schedule 18, items 3, 5, 18, 18, 19, 20, 21, 22, 24, 25, 26, 27, 30, 31, 32, 34
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)




2123

Distance to a prohibited movement and direction to the destination shown avoiding that prohibition

ltem	
1	Regulations: None
2	Directions: 7, 12(1)
3	Diagrams: None
4	Permitted variants: Schadule 16, items 6, 16, 18, 19, 21, 22, 24, 25, 26, 27, 30, 34 The diagram 612 symbol may be varied to a diagram 613 or 614 symbol
5	illumination requirements: Schedule 17, item 4






item	
1	Regulations: None
2	Directions: 7, 12(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, Items 16, 13, 19, 21, 22, 24, 25, 26, 27, 30, 34 The diagram 812 symbol may be varied to a diagram 813 or 614 symbol
5	lliumination requirements: Schedule 17, item 4




2125 Direction and distance to a destination on a non-primary route

ltern	
1	Regulations: None
2	Directions: 12(2)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 9, 15, 19, 20, 21, 22, 24, 30, 31, 32, 34
5	lilumination requirements: Schedule 17, item 4

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

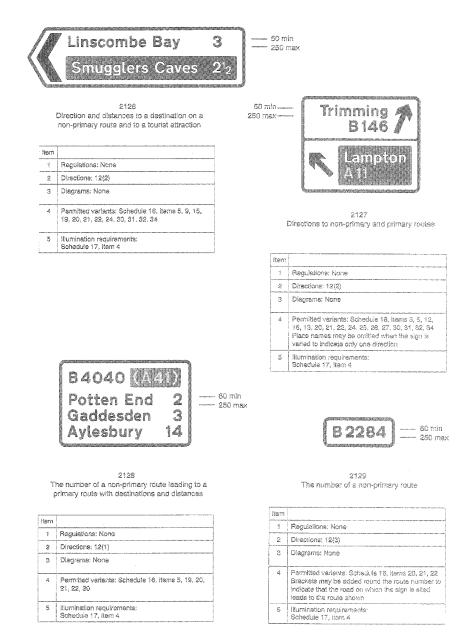

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)

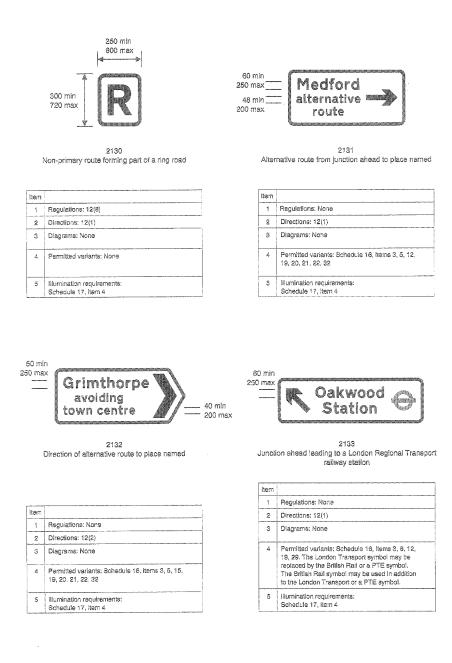


SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)



2134

Direction to a railway station




2135

Junction ahead leading to a car ferry

ltem	
1	Regulations: None
2	Directions: 12(2)
3	Diagrams: Nona
4	Permitted variants: Schedule 16, items 3, 6, 15, 19,29 The PTE symbol may be replaced by another PTE symbol or London Transport symbol or ornitted. The British Rail symbol may be omitted.
5	liumination requirements: Schedule 17, item 4

item 1 Regulations: None 2 Directions: 12(1) 3 Diagrams; None Permitted variants: Schedule 16, items 12, 28 The left hand car symbol may be replaced by the lony symbol. The two symbols may be omitted and the words 'Pedestrian ferry' added on the boet symbol. The name of the ferry or quay may be addee above the boat symbol. 4 Illumination requirements: õ Schedule 17, Item 4



2136

Direction to a vehicle ferry

Permitted variants: Schedule 16, Itams 15, 28 The right hand symbol may be varied to a car symbol The two symbols may be arritted and the words "Pedestrian (enty" added on the boat eymbol. The name of the ferry or quay may be added above

Kem

4

5

1 Regulations: None 2 Directions: 12(2) 3 Diagrams: None


> the boat symbol. lliumination requirements: Schedule 17, item 4



2137 Direction to a shopping area which provides a "Shopmobility" service for the disabled approved by the National Federation of Shopmobility

ltem	
1	Regulations: None
2	Directions: 12(2)
3	Diagrame: None
4	Permitted variants: Schedule 18, hems 18, 28, 29
5	Illumination requirements; Schedule 17, item 4

SCHEDULE 7 PART II NON-PRIMARY ROUTE DIRECTIONAL SIGNS (contd.)



2138 Indication of route to be followed at junction ahead for destinations that are not otherwise shown on the signs at that junction

2	Directions: 12(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 19, 20, 21, 22, 30, 34 "follow" and the route may be varied to "leave at next junction" or "leave at" and the name of a junction
8	Illumination regularmenta: Schedule 17. item 4

Regulation 11(1)

PART III

TOURIST ATTRACTION SIGNS

(other than on motorways or for pedestrians)

SCHEDULE 7 PART III TOURIST ATTRACTION SIGNS (other than on motorways or for pedestrians) Regulation 11(1)



60 min 250 max



2201 Distance ahead to a tourist attraction

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedute 16, items 6, 10, 11, 19, 28, 33
5	Illumination requirements: Schedule 17, item 9

2202 Junction ahead leading to a tourist attraction

item	
1	Regulations: None
2	Directions: 12(3)
3	Diagrama: None
4	Permitted variants: Schedule 16, ftems 6, 9, 12, 19, 28, 29, 31, 32, 33, 34
5	Illumination requirements: Schedule 17, item 9





50 min 250 max

2204 Direction and distance to a Tourist Information Point or Centre

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diegrams: None
4	Permitted variants: Schedule 16, hems 6, 9, 15, 29 The word "centre" may be added
5	Illumination requirements: Schedule 17, item 3

2203 Direction and distance to a tourist attraction

ltem	
3	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, itsms 6, 9, 15, 19, 24, 31, 32, 34
5	Illumination requirements: Schedule 17, Item 9

SCHEDULE 7 PART III TOURIST ATTRACTION SIGNS (contd.)





2205 Location of a Tourist Information Point or Centre

2 40 min 150 max

item	
١	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 11 The word "centre" may be added. The name of a geographical area may be added.
5	Illumination requirements: Schedule 17, Item 9


2206 Junction ahead leading to a tourist attraction where the route is subsequently indicated by a symbol

ltern	
1	Regulations: None
2	Directions: 12(3)
з	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 9, 12, 19, 28, 33
5	Illumination requirements: Schedule 17, Item 9



2207 Direction and distance to a tourist attraction where the route is subsequently indicated by a symbol

Item	
1	Regulations: None
2	Directions: 12(3)
3	Diagrama: None
4	Permitted variants: Schedule 16, items 5, 9, 15, 19, 28, 33
5	Illumination requirements: Schedule 17, item 9



2208 Direction to a tourist attraction indicated by a symbol

ltem	
ř	Regulations: 12(8)
2	Directions: 12(3)
3	Diagrams; None
4	Permitted variants: Schedule 16, items 15, 28, 33
5	tilumination requirements: Schedule 17, item 9

SCHEDULE 7 PART III TOURIST ATTRACTION SIGNS (contd.)





60 min 3<u>00 m</u>ax

2209 Distance ahead to a tourist attraction

ltam	
4	Regulations: None
2	Directions: 12(3)
з	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 19, 33 Opening times may be added. The distance may be replaced by the word "CLOSED"
õ	Illumination requirements: Schedule 17, item 9

2210 Junction ahead leading to or along a route passing through places of interest

ltern	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 19, 29, 33 The rose symbol may be varied to the thistle symbol in Scotland or the dragon symbol in Wales. The cycle symbol may be added.
5	Illumination requirements: Schedule 17, item 9



_ 50 min 250 max



50 min

2211 Direction to or along a route passing through places of interest


ltern	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, itams 15, 19, 29, 33 Same as diagram 2210
5	Illumination requirements: Schedule 17, item 9

2212 Direction along a route passing through places of interest Item


Courter	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 15, 33 Same as diagram 2210
5	Illumination requirements: Schedule 17, item 9

¹⁰ ra anno 1900 ann ann an Anna ann ann ann ann ann ann		60 min 300 max
item		
1	Regulations: Nona	1
2	Directions: 12(3)]
3	Diagrams: None	
4	Permitted variants: Schedule 16, items 3, 5, 12, 19, 28, 33 The place name and the word "to" may be crritted or replaced by a geographical or historical title. "Yourist" may be varied to "Scenic" or "Coestait". The rose symbol may be varied to the thistle symbol in Scotland or the dragon symbol in Wales. "roste" may be varied to "trait" in Scotland.	
ő	Illumination requirements: Schedule 17, item 9	
	Anytown 🚺	

SCHEDULE 7 PART III TOURIST ATTRACTION SIGNS (contd.)



item	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 15, 19, 29, 33 Same as diagram 2213
ā	Illumination requirements: Schedule 17, item 9



2216 Junction ahead leading to a town or geographical area in England or Soctiand containing several tourist attractions and a Tourist Information Point or Centre

itern	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schadule 16, items 12, 19, 28, 29, 33
ô	iliumination requirements: Schedule 17, item 9



300 max

2216

Junction shead leading to tourist attractions and a Tourist Information Point or Centre reached in different directions

item	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 18, Items 3, 6, 12, 16, 19, 28, 29, 33
5	Numination requirements: Schedule 17, Item 9

214

Regulation 11(1)

PART IV

SERVICES SIGNS

(other than on motorways)

Regulation 11(1)

SCHEDULE 7 PART IV SERVICES SIGNS (other than on motorways)



50 min 250 max

2301 Distance ahead to a camping and caravan site licensed under the Caravan Sites and Control of Development Act 1960 and/or the Public Health Act 1956 and having a minimum of 20 pitches for casual overnight use

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, Items 6, 10, 11 Ether the caravan or the tent symbol may be omitted
5	Illumination requirements: Schedule 17, item 4

Youth Hostel X N I 1 mile



2303 Distance ahead to a hostel managed by the Youth Hostels Association or the Scottish Youth Hostels Association

Item	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitied variants: Schedule 16, ilems 6, 10, 11
5	Illumination requirements: Schedule 17, Item 4



2302 Direction and distance to a camping and caravan site

	as defina	ed in the	caption	under	dlagram	2301
--	-----------	-----------	---------	-------	---------	------

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Dlagrams: None
4	Permitted variants: Schedule 16, items 6, 9, 15 Same as diagram 2301
5	Illumination requirements: Schedule 17, Item 4



2304 Direction and distance to a hostel as defined in the caption under diagram 2303

item	
1	Regulations: None
2	Directions: 12(3)
3	Diegrams: None
4	Permittad variants: Schedule 16, items 6, 9, 15, 29
5	Illumination regulaements: Schedule 17, item 4

SCHEDULE 7 PART IV SERVICES SIGNS (contd.)

ltem 1

4


6

150 min 300 max

Regulations: None 2 Directions: 12(3) 3 Diagrams: None

Permitted variants: Schedule 16, items 6, 9, 15, 29

illumination requirements: Schedule 17, item 4



2305

Distance ahead to a picnic area

150 yds _ 50 min 250 max

2306 Direction and distance to a picnic area


item :	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 10, 11
5	Illumination requirements: Schedule 17, Item 4



2308


Junction ahead leading to a small town or village not on a main through route, which provides parking, public toilets, refreshments and fuel during normal shop opening hours at least

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
Ļ	Permitted variants: Schedula 16, Items 12, 19 The spoor and fork (denoting reataurant), bed (denoting hotei) or tourist information "i" symbols shall be omitted where those facilities are not provided. A white pump symbol shall be substituted for the one shown where unleaded petrol is not available. In Wales the words "local services " may be omitted
5	Illumination requirements: Schedule 17, item 4



ltem	
ą	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 10 The AA or RAC logo may be added alongside the teleptone symbol. Any of the symbolic except the "P" and the "F" may be omitted. The name of a geographical area may be added at the lop.
5	Numination requirements: Schedule 17, item 4



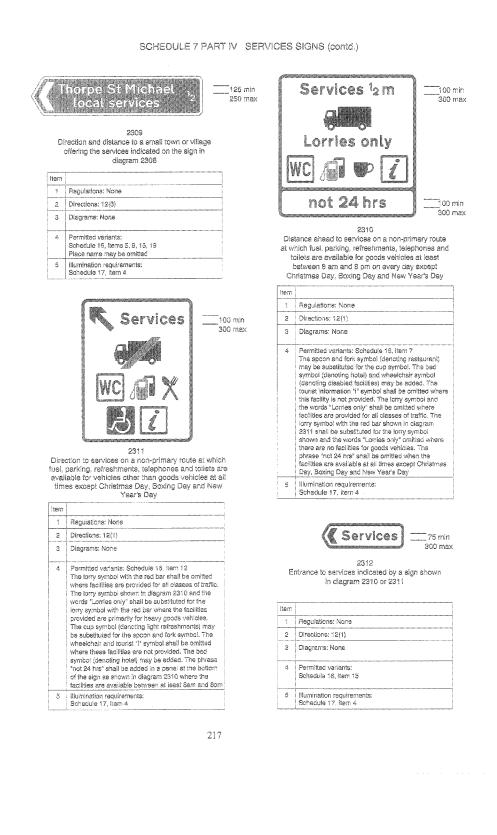

SCHEDULE 7 PART IV SERVICES SIGNS (contd.) Services 12 m _100 min Services 75 min -300 max Lorries only 2312.1 Same as diagram 2312 h 6 100 min

300 max

2313 Distance ahead to services on a primery route at which fuel, parking, refreshments, telephones and toilets are available at least between 8 am and 8 om on every day except Christmas Day, Boxing Day and New Year's Day

item	
1	Regulations: None
2	Directions: 11(1)
3	Diagrams: None
ĉ,	Permitted variants: Schedule 16, item 7 Same as diagram 2310
5	Illumination requirements: Schedule 17, item 4




75 min 300 max

2315 Entrance to services indicated by a sign shown in diagram 2313 or 2314

item	
ï	Regulations: None
2	Directions: 11(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, item 15
5	Illumination requirements: Schedule 17, Item 4

218

item	
1	Regulations: None
2	Directions: 12(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, item 12
5	litumination requirements: Schedule 17, item 4



2314

2314 Direction to services on a primary route at which fuel, parking, refreshments, telephones and tollets are available for vehicles other than goods vehicles at all times on every day except Christmas Day, Boxing Day and New Year's Day


kem	
1	Regulations: None
2	Directions: 11(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, item 12 Same as diagram 2311
5	Illumination requirements: Schedule 17, Item 4

SCHEDULE 7 PART IV SERVICES SIGNS (contd.)

75 min

300 max





2315.1 Same as diagram 2315

ltern	
1	Regulations: None
2	Directiona: 11(1)
3	Diagrams: None
4	Permitted variants: Scheoule 16, item 12
5	Illumination requirements: Schedule 17, item 4

2316 Junction ahead leading to an Automobile Association service centre

item	
1	Regulations: None
2	Directions: 12(3)
3	Diegrams: None
4	Permitted variants: Schedule 16,19ems 6, 9, 13, 14, 28 The word "Service" may be omitted
5	illumination requirements: Schedule 17, item 9





2317 Direction and distance to an Automobile Association service centre

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permittad variants: Schedule 16, itams 6, 9, 15, 28, 29
5	lliumination regultements: Schedule 17, item 9

2318 Direction and distance to an Automobile Association telephone

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, Itema 6, 9, 15, 28, 29
5	Iliumination requirements: Schedule 17, item 9



SCHEDULE 7 PART IV SERVICES SIGNS (contd.)





____50 min _____250 max


2319 Distance ahead to a Royal Automobile Club service centre

ltem	
ĩ	Regulations: None
5	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 9, 10, 11, 28 The words "Service Centre" may be omitted
ő	Illumination requirements: Schedule 17, item 9

2320 Direction and distance to a Royal Automobile Club service centre

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Dlagrams: Norie
4	Permitted variants: Schadule 16, items 6, 9, 15, 28, 29
5	illumination requirements: Schedule 17, item 9





item	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 9, 15, 28, 29
5	Illumination requirements: Schedule 17, item 9



ltern	
1	Regulations: None
2	Directions: 12(2)
3	Diagrams: None
4	Permitted variants: Schedule 16, Iteme 3, 6, 15, 28, 29 "Payphone" may be omitted or varied to "Cardphone"
8	fliumination requirements: Schedule 17, item 9

SCHEDULE 7 PART IV SERVICES SIGNS (contd.)



2323 Direction to public toilets with facilities for disabled people

ltem	
1	Regulations: None
2	Directions: 12(2)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 15, 28 The wheelchair symbol may be omitted. The words "Ladies" or "Gents" may be added
5	illumination requirements: Schedule 17, item 9

Regulation 11(1)


PART V


BOUNDARY SIGNS

(other than on motorways)

SCHEDULE 7 PART V Regulation 11(1) BOUNDARY SIGNS (other than on motorways) 70 min FORDSHIRE 280 max 2401 County or (in Scotland) regional boundary Item 1 Regulations: 13(1), 13(4) 2 Directions: 12(3) 3 Diagrams: None Permitted variants: Schedule 16, item 19 The creet or logo may be omitted or varied as appropriate. The name of the county may be varied to "England", "Scotland" or "Wales". A massage of welcome, or a phrase denoting an item of local geographical or historical interest, not exceeding 4 words may be added. The latters, border and background may be in any contrasting ociours except red. The border may be omitted. In Scotland a reference to not more than two places outside the United Kingdem with which the Scotlish local authority is winned may be added as stown in clagram 2403 Bundbadine conductments 4 Illumination requirements: Schedule 17, item 9 5



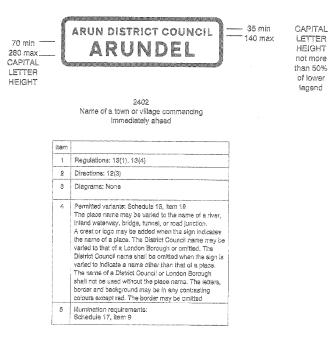


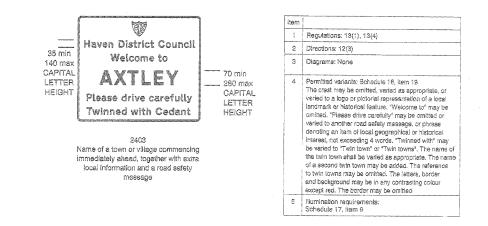


Regulation 11(1)

PART VI

DIRECTIONAL SIGNS TO PARKING PLACES

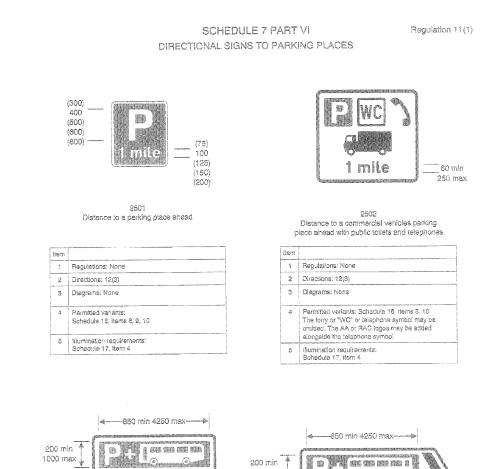

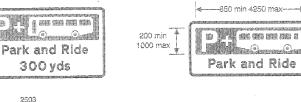



2503 Distance to a parking place ahead from which a 'Park and Ride' scheme operates

1000 max

50 min

250 max





2504

50 min

250 max

1	Hagulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 18, items 3, 8, 15, 28 Same as diagram 2508
5	Illumination requirements: Schedule 17, Item 4

SCHEDULE 7 PART VI DIRECTIONAL SIGNS TO PARKING PLACES (contd.)



2505 Directions to different types of parking place from a junction ahead

1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, itsms 3, 6, 12, 18, 28, 38 One of the following alternative legends may be used or the legend may be omitted: 1. "Free" 2. "Shoppers" 3. "Commuters" 4. "Long stay" 5. "Short stay" 6. "Pay and cleptay" 7. "Multi-storey" 8. A geographical name 9. British Reli, London Transport or a PTE symbol Any one or two of the following symbols may be added: 1. Pedal cycle shown in clegram 968 2. Bus shown in clegram 969 3. Goods vehicle shown in diagram 804.1 4. Car shown in diagram 804.2 5. Caravan drawn by car shown in diagram 804.3 6. Tourist Information "I" shown in clegram 2310 The total number of spaces in the parking place may be indicated in white figures in the bottom right hand comer of the "P" symbol as shown in clearem 2506
5	Illumination requirements: Schedule 17, Ram 4

Direction to a parking place for shoppers and showing the total number of parking places

50 min 250 max

Item 1 Regulations; None 2 Directions: 12(3) 3 Diagrams: None Permitted variants: Schedule 16, itams 3, 6, 12, 25, 38 The number of spaces may be varied or omitted. Same as diagram 2505 4 5 Illumination requirements: Schedule 17, item 4



2507 Direction to a parking place available only on the day specified

ltern	
1	Regulations: None
2	Directions: 12(3)
з	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 15, 28, 37, 38 Same as clagram 2505
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 7 PART VI DIRECTIONAL SIGNS TO PARKING PLACES (contd.)



2508 Direction and distance to a multi-storey parking place

Q

50 min

Multi-storey

250 yds

item 1 Regulations: None 2 Directions: 12(3) 3 Diagrams: None Permitted varianta: Schedule 16, items 6, 9, 15, 28, 38 Same as diagram 2505 4 Iliumination requirements: Schedule 17, item 4 5

2609 Directions to several alternative parking places with an indication of the availability of parking spaces at each one

item	
1	Regulations: None
2	Directions: 12(3), 49
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 18, 19 The name of a place may be added to or substituted for the words "Town centre". The legends "Long stay" or "Short stay" may be acced to or substituted for each of the geographical names. The word "FULL" may be varied to "CLOSED" in red latters. The arrow symbols may remain displayed when the legends "FULL" or "CLOSED" are shown. The word "Spaces" in black ters may be displayed in addition to the arrow symbols
5	Illumination requirements: Schedule 17, item 4

226

Regulation 11(1)

PART VII

DIRECTIONAL SIGNS FOR CYCLISTS AND PEDESTRIANS

SCHEDULE 7 PART VII DIRECTIONAL SIGNS FOR CYCLISTS AND PEDESTRIANS Regulation 11(1)






= 35 min 60 max

2801 Junction ahead where route to destination shown recommended for pedal cycles differs from that for other traffic

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: Nona
4	Permitted variants: Schedule 16, items 5, 9, 12, 19, 28, 29, 34
5	lliumination requirements: Schedule 17, item 9

2602 Direction and distance to destination shown of route recommended for pedal cycles, which differs from ithat for other traffic

item	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
ġ	Permitted variants: Schedule 16, items 5, 9, 15, 19, 28, 29, 34
5	Illumination requirements: Schedule 17, item 9



2603 Junction shead leading to a parking place for pedal cycles

item	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 12, 28, 29
5	Blumination requirements: Schedule 17, item 9




2604 Direction and distance to a free parking place for pedal cycles

ltern	
í	Regulations: None
2	Directions: 12(3)
3	Dlagrams: None
4	Permitted variants: Schedule 18, items 6, 9, 15, 28, 29 The word "Free" may be omitted.
5	Illumination requirements: Schedule 17, item 9



i.

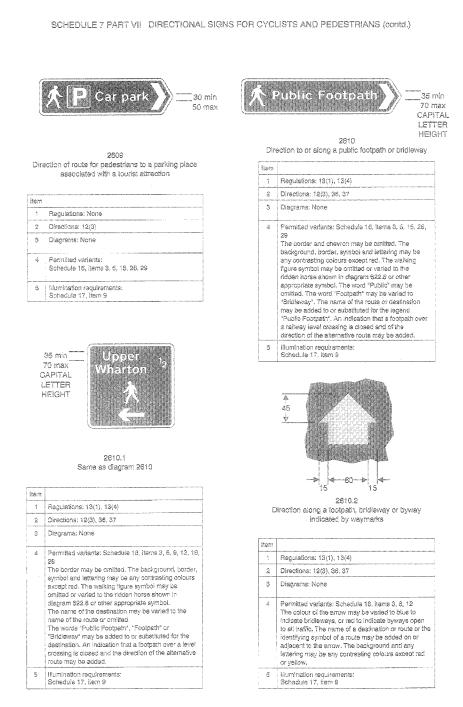

229


Regulation 11(1)

PART VIII

TEMPORARY AND EMERGENCY DIRECTIONAL SIGNS

SCHEDULE 7 PART VIII Regulation 11(1) TEMPORARY AND EMERGENCY DIRECTIONAL SIGNS 1050-Diversion 50 min Oak Farm zśn 125 max Estate 2701 2702 Direction to a new housing development Start of temporary diversion route Item ltern 1 Regulations: None ï Regulations: None 2 Directions: 12(3), 33(2) Directions: 12(3) 2 З Diagrams: Nons 3 Diagrams: None Permitted variants: Schedule 16, item 12 The arrow symbol may be replaced by the word "ends" or a distance in yards up to 400 yards to the nearest 10 yards. 4 Permitted variants: 4 Permitted variants: Schedule 16, items 3, 6, 15, 19, 28 The lorry symbol in diagram 804.1 may be added Illumination requirements: Schedule 17, item 9 õ Ilumination requirements: Schedule 17, item 4 5





60 min 📃

250 max


ltern	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, item 12 Route number may be added. Any symbol shown in Part VII of Schedule 13 may be substituted for "Diverted traffic".
5	Illumination requirements: Schedule 17, item 4



2704 Direction of temporary diversion route

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrama: None
4	Permitted variants: Schedule 16, item 15 Same as diagram 2703
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 7 PART VIII TEMPORARY AND EMERGENCY DIRECTIONAL SIGNS (contd.)



2705 Junction ahead leading to temporary diversion routes to the destinations shown

Permitted variants: Schedule 16, items 3, 5, 12, 16, 19, 20, 30

ltem

з

4

1 Regulations: None 2 Directions: 12(3)

Diagrams: None


5 Illumination requirements: Schedule 17, item 4



_____ 60 min 250 max

2708 Roundabout ahead leading to a temporary diversion route to the destination shown

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 19, 20, 30
5	Illumination requirements: Schedule 17, item 4




2707 Direction of temporary diversion route to destination shown

ltern	
٩	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 15, 19, 20, 30
5	Numination requirements: Schedule 17, Item 4




2708 Junction ahead leading to route for emergency vehicles to a temporary incident control point


ltem	
1	Regulations: 12(8)
2	Directions: 12(3)
З	Diagrams: None
4	Permitted variants: Schedule 16, item 12 "EMERGENCY VEHICLES" may be varied to "INCIDENT CONTROL"
5	lilumination requirements: Schedule 17, item 4

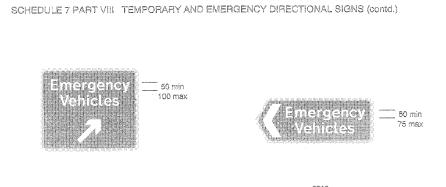

2709 Direction of route for emergency vehicles to an emergency services incident point

item	
ş	Regulations: None
2	Directions: 12(3)
з	Diagrams: None
4	Permitted variants: Schedule 16, item 12 Place name may be added
5	Illumination requirements: Schedule 17, item 4






item	
1	Regulations: 12(8)
2	Directions: None
3	Diagrains: None
4	Permitted variants: Schedule 16, items 13, 28 Symbols may be arranged vertically
5	Illumination requirements: Scheduls 17, item 2

2710 Direction of route for emergency vehicles to an emergency services incident point


ltem	
1	Regulations: None
8	Diractions: 12(3)
3	Diagrams: None
đĵ	Permitted variants: Schedula 16, Item 15 Place name may be added
5	Illumination requirements: Schedule 17, item 4



2712 Location of fire rendezvous point


ttern	
1	Regulations: 12(8)
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: The legend "No. 1" may be varied to another number, a letter or a compass point. "F.R.P." may be varied to 'R.V.P."
5	Siumination requirements: Schedule 17, Item 9


SCHEDULE 7 PART VIII TEMPORARY AND EMERGENCY DIRECTIONAL SIGNS (contd.)




2713 Direction to nearest emergency telephone box on same side of the road

ltem	
1	Regulations: 12(8)
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, item 15
5	illumination requirements: Schedule 17, item 9






ltem	
1	Regulations: 12(8), 19(4)
2	Directions: None
3	Diagrams: None
4	Permitted variants: The identification number may be varied as appropriate. The colour of the legend and symbol may be varied to black
5	lilumination requirements: Schedule 17, item 15



2713.1 Distance ahead to emergency telephone in a lay-by

ltem	
ţ	Regulations; None
2	Directions: 12(3)
3	Diagrams: 842.2, 1018.1
4	Permitted variants: Schedule 16, items 6, 9, 11, 28 The "P" symbol may be placed to the left of the orange panel or ornitted
5	Illumination requirements: Schedule 17, item 4



2715 Back of emergency telephone box

item	
1	Regulations: 12(8), 19(4)
2	Directions: None
3	Diagrams: None
4	Permitted variants: Same as diagram 2714
5	lliumination requirements: Schedule 17, item 15



SCHEDULE 7 PART VIII TEMPORARY AND EMERGENCY DIRECTIONAL SIGNS (contd.)



2716 Junction ahead leading to a temporary diversion route, the direction along which is indicated by a symbol shown in Part VII of Schedule 13 Item 1 Regulations: None 2 Directions: None 3 Diagrams: None 4 Permitted variants: Schedule 15, Item 20 The diversion symbol may be varied to any of those shown in Part VII of Schedule 15 or to a route number on numbers in which case the legend may be on an extra line; "follow" may be omitted when route numbers are shown 3 Illignetic to a soute Bendeule 17, Item 4

234

Regulation 11(1)

PART IX

OTHER NON-MOTORWAY DIRECTIONAL SIGNS

SCHEDULE 7 PART IX OTHER NON-MOTORWAY DIRECTIONAL SIGNS Regulation 11(1)




2801 Junction ahead leading to Department of Transport testing station for goods vehicles

Item	
1	Regulations: None
2	Directions: 12(3)
8	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 12, 29
5	Illumination requirements: Schedule 17, item 9

2802 Direction to Department of Transport testing station for goods vehicles

ltem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 15, 29
õ	Illumination requirements: Schedule 17, item 9




2803 Junction ahead leading to routes to Ministry of Defence establishments

Item	
1	Regulations: None
2	Directions: 12(3)
з	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 12, 16, 19
5	Illumination requirements: Schedule 17, item 4

2804 Direction to a Ministry of Defence establishment

liem	
1	Regulations: None
2	Directions: 12(3)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 15, 19
5	Mumination requirements: Schedule 17, item 4

SCHEDULE 7 PART IX OTHER NON-MOTORWAY DIRECTIONAL SIGNS (contd.)





250 max

2805

Junction ahead leading to route advised for goods vehicles, which differs from that for other traffic

Itera	
1	Regulations: None
2	Directions: 12(3)
3	Disgrams: None
4	Permitted variants: Schedule 16, items 12, 16, 20, 21, 22, 28 Destinations may be added to or substituted for the route numbers. Non-princary route numbers shall be route numbers shall be the shown in white characters on the black background.
â	illumination requirements: Schedule 17, item 4

2806 Direction to destination shown of route advised for goods vehicles, which differs from that for other traffic

ltern	
1	Regulations: None
2	Directions: 12(3)
3	Diegrams: None
4	Permitted variants: Schedule 18, Items 15, 19, 20, 21, 22, 28 Route numbers may be added to or substituted for the destingtion. Non-primary route numbers shall be shown in write characters on the black background.
5	lilumination requirements: Schedule 17, item 4



2807

Direction to destination shown along minor rural roads

item	
1	Regulations: None
2	Directions: 12(2)
3	Diagrame: Nons
4	Permitted variants: Schedule 16, items 3, 5, 15, 19
5	Illumination requirements: Schedule 17, item 9

Regulation 11(1)

PART X

MOTORWAY SIGNS

SCHEDULE 7 PART X

MOTORWAY SIGNS

Regulation 11(1)

100 min _____ M 6 2 AL

2901 Regulations in force under section 17 of the 1984 Act start to apply to the road at this point

ltem	
1	Regulations: None
2	Directions: 13(1)
3	Diagrams: None
Ą	Permitted variants: Schedule 16, fiem 20
ō	lilumination requirements: Schedule 17, item 1



2902 Direction to a motorway at the junction shown, indicating route number and destination reached

along the motorway

Permitted variants: Schedule 16, items 15, 19, 20,

Permined ventrics: Schebule 10, items 13, 19, 20, 28, 30 The molerway regulations symbol shall be onitiad and the letters and numerals in Part I of Schedule 13 used for the molorway route number where that part of the junction leads indirectly to the motorway

item 1

2

3

4

5

Regulations: None

Iliumination requirements: Schedule 17, item 1

Directions: 13(2) Diagrams: None



2902.1

Direction to a motorway at the junction shown, indicating route number and destination


ltem	
1	Regulations: None
2	Directions: 18(2)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 20, 29,
5	Illumination requirements: Schedule 17. Item 1



	n an an an ann an an an an an ann an ann an a
SCHEDULE	7 PART X MOTORWAY SIGNS (contd.)
250 min	Nottingham
400 max	
200 min	TOTE .
320 max	1 <u>25</u> 2 M
	2903
	ray junction ahead, identified by the number a black background, leading to the destination
	shown. The number of lanes on the motorway
	emains the same through the junction
Item	
1 84	guiations: None
	rections: 19(1)
	agrams: None
	rmitted varients:
Sa	hedule 16, items 7, 19, 20, 30, 34
5 (i).	mination requirements:
Sc	hedule 17, item 1
Worces	ator I
5	
400 max — Dudley	
Warlev	Stafford
	Walsall M 6
1 V 15 8 1	
interest N	A Martin Martin Contract A Martin
200 min	bml I
200 min 9	
· · · · · · · · · · · · · · · · · · ·	
Motory	2904 ay junction ahead, identified by the number
	on a black background, where the left hand
lane of a	motorway leads to another motorway and the
other tv	to lanes continue along the main motorway route
Item	
	a Jakingar (AMA)
	gulations: 13(2)
	ections: 13(1)
3 Dia	grams: None
4 Pe	mitted variants:
	redule 16, items 7, 16, 19, 20, 30, 34


202

litumination requirements: Schedule 17, item 1

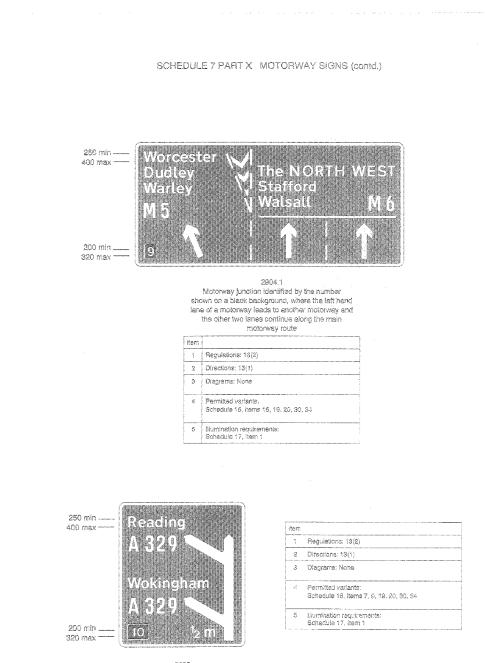

2905 Two motorway junctions ahead in quick succession, Identified by the number shown on a black background, leading to the destinations and routes shown. The number of lanes on the motorway remains the same through the junction

SCHEDULE 7 PART X MOTORWAY SIGNS (contd.)



²⁹⁰⁶ Motorway junction, identified by the number shown on a black background, leading to the destination and route shown and with an indication of the destinations reached by remaining on the motorway. The number of lanes on the motorway remains the same through the junction.

4


5

Permitted variants:


Illumination requirements: Schedule 17, Item 1

Schedule 16, items 7, 9, 19, 20, 30, 34

item	
1	Regulations: 13(2)
2	Directions: 13(1)
9	Diagrams: None
4	Permitted variants: Schedule 16, items 19, 20, 80, 84
õ	Illumination requirements: Schedule 17, item 1

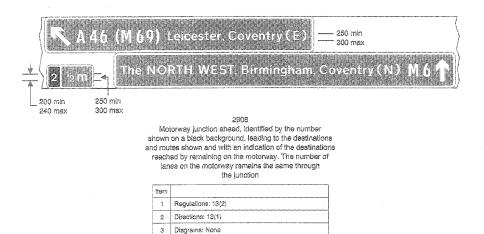

SCHEDULE 7 PART X MOTORWAY SIGNS (contd.)

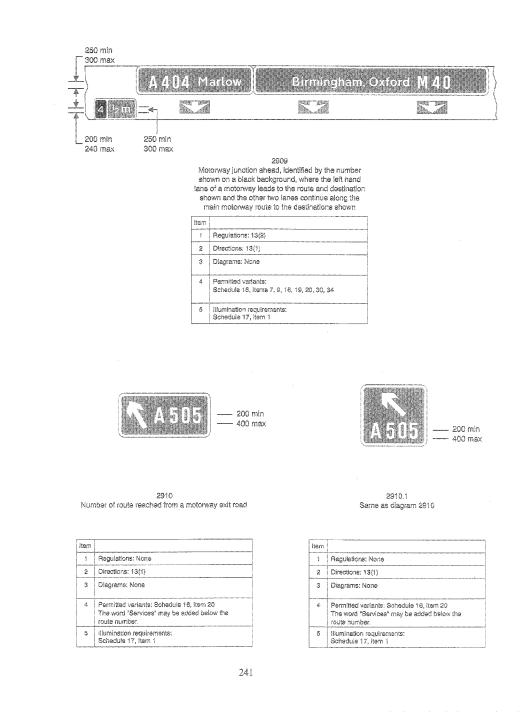

SCHEDULE 7 PART X MOTORWAY SIGNS (contd.)




2911 Route number of the motorway with destinations and distances to places along or reached from that route

ltem	
1	Regulations: None
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: Schedute 16, Itama 4, 19, 20, 30
5	litumination requirementé: Schedule 17, item 1



2912 Junction ahead with another motorway

ltem	
1	Regulations: None
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, items 4, 20
5	Illumination recuirements: Scheduls 17, item 1

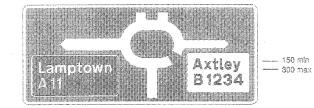

2913 Rouncabout shead leading from a motorway sxit slip road to a primary and a non-primary route

item	
1	Regulations' 13(2)
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: Schedulie 16, items 16, 18, 19, 20, 21, 22, 23, 24, 25, 26, 30, 31, 32, 34
5	tilumination requirements: Schedule 17, item 4



SCHEDULE 7 PART X MOTORWAY SIGNS (contd.)

Crawford Elkington - 250 min Gt Trimming ----- 400 max B1221 Bessey e recenced 2914 Termination of a motorway at a roundabout ahead leading to two primary routes and a non-primary route Item Ť Regulations: 13(2) 2 Directions: 13(1) з Diagrams: None Permitted variants: Schedule 16, items 16, 18, 19, 20, 21, 22, 29, 24, 25, 26, 30, 31, 32, 34



5

----- 250 min - 400 max

Illumination requirements: Schedule 17, Item 4




2915 Notorway junction ahead indicating the route to be followed for destinations not otherwise signed at that junction


item	
1	Regulations: None
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, Items 19, 20, 30, 34 "follow" and the route may be varied to "leave at next junction" or "leave at Junction" and the junction number; "Junction" may be varied to "J"
ş	Illumination requirements: Schedule 17, Item 1


2918 Absence of hard shoulder for the distance shown

ltem	
1	Regulations: None
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, Items 6 Legend may be shown on four lines
8	Elumination requirements: Schedule 17, item 4

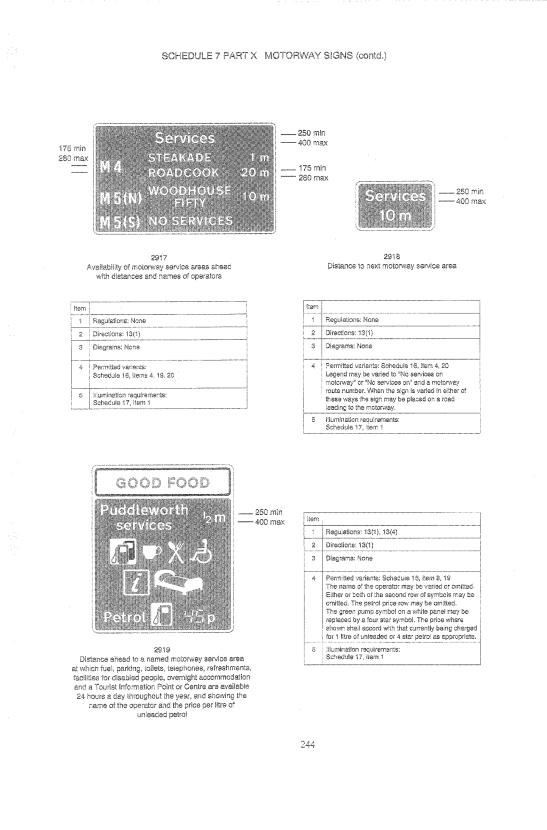



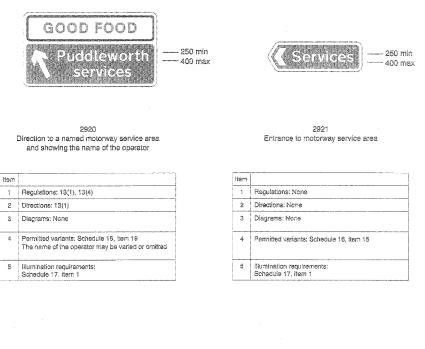



2922 Entrance for works traffic only

ltern	
ĭ	Regulations: 12(8)
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



2923 Waiting place for police vehicles only


ltern	
1	Regulations: 12(8)
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 7 PART X MOTORWAY SIGNS (contd.)



2924 Motorway junction ahead leading to the tourist attractions shown

Kem	
1	Regulations: None
Ż	Directions: 13(1)
3	Diagrams: None
4	Permitisd variants: Schedule 16, items 19, 33
5	Illumination requirements: Schedule 17, item 4

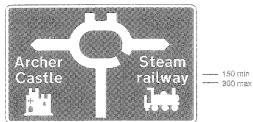


- 150 min

2925 Roundabout ahead leading from a motonway exit silo road to the tourist attractions shown


ltem	
;	Regulations: None
2	Directions: 13(1)
3	Diagrame: None
4	Permitted variants: Schedule 16, Itams 5, 6, 18, 18, 19, 28, 31, 32, 33
ő	liumination requirements: Schedula 17, item 4

SCHEDULE 7 PART X MOTORWAY SIGNS (contd.)



2926 Junction ahead from a motorway exit slip road to the iourist attractions shown

item	
1	Regulations: None
2	Directions: 19(1)
8	Diagrams: None
4	Permitted variants: Schedule 13, items 5, 12, 16, 19, 28, 29, 31, 32, 33
5	Illumination requirements: Schedule 17, item 4



Item 1 Regulations: None 2 Directions: 13(1) 3 Diagrams: None Permitted variants: Schedule 16, items 19, 33 4 5 Illumination requirements: Schedule 17, Itam 4

250 min — 300 max-


> 2927 Motorway junction ahead leading to a town or geographical area in England or Scotland containing a Tourist information Point or Centre and several tourist attractions

SCHEDULE 7 PART X MOTORWAY SIGNS (contd.)



2928 County or (in Scotland) regional boundary

Item	
1	Regulations: None
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: Schedule 16, item 19 The county's crest and either a message of welcome or a phrase denoting an item of local geographical or historical interest, not exceeding 3 words in either case, may be added
5	lilumination requirements: Schedule 17, Item 4



2930 Regulations referred to in the caption under diagram 2901 cease to apply ahead

ltem	
1	Regulations: None
2	Directions: 13(1)
З	Diagrams; None
4	Permitted variants: "1 mile" may be varied to "1/2 mile"
5	Illumination requirements: Schedule 17, item 1



— 150 min — 400 max

2929

Motorway junction ahead leading to route advised for goods vehicles to the destination shown, which differs from that for other traffic


ltem	
1	Regulations: None
2	Directions: 13(1)
з	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 19, 20, 28 Route numbers shall be shown in white characters on the black background
5	lliumination requirements: Schedule 17, item 1

1300(1950)(2800) 1300 (1950) (2800) (2800)

2931 Regulations referred to in the caption under diagram 2901 cease to apply at this point

ltem	
1	Regulations: None
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: None
5	IBumination requirements: Schedule 17, item 1

SCHEDULE 7 PART X MOTORWAY SIGNS (contd.)



150


2832 Entrance to motorway service area, maintenance compound or similar facility contained within the length of a motorway and indicating that the Regulations referred to in the caption under diagram 2801 cease to apply at this point


Item	
1	Regulations: 12(8)
2	Directions: 13(1)
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

SCHEDULE 8


Regulations 30, 31, 32


LIGHT SIGNALS FOR THE CONTROL OF VEHICULAR TRAFFIC

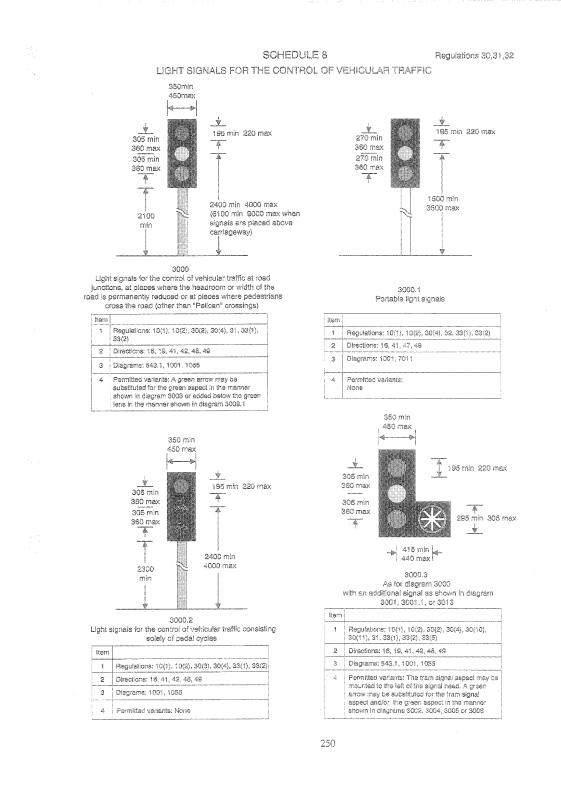


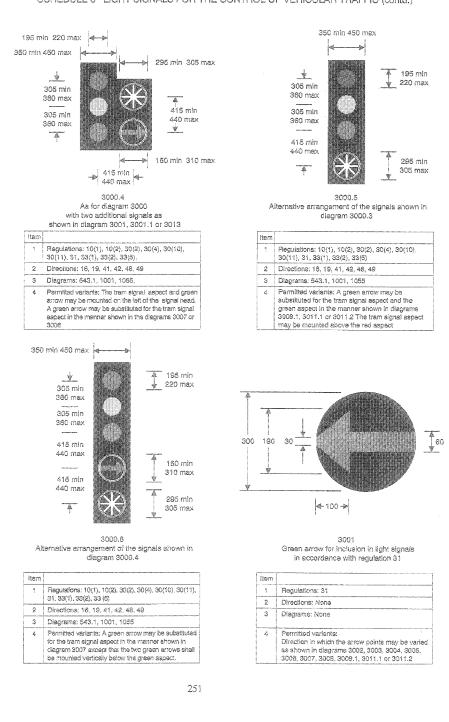

SCHEDULE 8 LIGHT SIGNALS FOR THE CONTROL OF VEHICULAR TRAFFIC (contd.)








3001.1 Same as diagram 3001

item	
1	Regulations: 31
2	Directions: None
3	Diagrams: None
4	Permitted variants: Same as diagram 3001


3002 Light signals shown in diagram 3000.3 with a green arrow shown in diagram 3001 or 3001.1 substituted for the tram signal shown in diagram 3013

ltem	
1	Regulations: 10(1), 10(2), 31, 33(1)
2	Directions: None
3	Diagrams: None
4	Permitted variants: The green arrow may be varied to the type shown in diagram 3001.1 See regulation 31 (2)



3003 Light signals shown in diagram 3000 with a green arrow shown in diagram 3001 or 3001.1 substituted for the green signal


ltem	
1	Regulations: 10(1), 10(2), 31, 33(1)
2	Directions: None
3	Diagrams: None
4	Permitted variants: The green arrow may be varied to the type shown in diagram 3001.1 See regulation 31 (3)




3004 Same as diagram 3002

ltem	
1	Regulations: 10(1), 10(2), 31, 33(1)
2	Directions: None
3	Diagrams: Nona
4	Permitted variants: The green arrow may be varied to the type shown in diagram 3001.1 See regulation 31(2)

SCHEDULE 8 LIGHT SIGNALS FOR THE CONTROL OF VEHICULAR TRAFFIC (contd.)






3005 Light signals shown in diagram 3000.3 with green arrows shown in diagrams 3001 or 3001.1 substituted for the green aspect and the tram signal shown in diagram 3013

item	
1	Regulations: 10(1), 10(2), 31, 33(1)
2	Directions: None
3	Diagrams: None
4	Permitted variants: Both green arrows may be varied to the type shown in diagram 3001.1 See regulation 31(4)




ltern	
1	Regulations: 10(1), 10(2), 31, 33(1)
2	Directions: None
з	Diagrams: None
4	Permitted variants: Both green arrows may be varied to the type shown in diagram 3001.1 See regulation 31 (4)



3007 Light signals shown in diagram 3000.4 with a green arrow shown in diagrams 3001 or 3001.1 substituted for the tram signal shown in diagram 3013


ftern	
1	Regulations: 10(1), 10(2), 31, 33(1)
2	Directions: None
з	Diagrams: None
4	Permitted variants: Both green arrows may be varied to the type shown in diagram 3001.1 See regulation 31(5) The two green arrows may be mounted below the signal head in the manner shown in diagram 3000.6



3008 Same as diagram 3007 ltam 1 Regulations: 10(1), 10(2), 31, 33(1) 2 **Directions:** None З Diagrams: None Permitted variants: Same as diagram 3007 4




SCHEDULE 8 LIGHT SIGNALS FOR THE CONTROL OF VEHICULAR TRAFFIC (contd.)



3009.1 Light signals shown in diagram 3000 with a green arrow shown in diagram 3001 or 3001.1 added below the green signal.


ltem	
١	Regulations: 10(1), 10(2), 31, 33(1)
2	Directions: None
з	Diagrams: None
4	Permitted variants: The green arrow may be varied to the type shown in diagram 3001.1 See regulation 31(3)



3011.1 Light signals shown in diagram 3000 with a green arrow shown in diagram 3001 or 3001.1 substituted for the green signal and a second arrow added below that. The arrows shall be illuminated and extinguished simultaneously.


ltem	
1	Regulations: 10(1), 10(2), 31, 33(1)
2	Directions: None
З	Diagrams: None
4	Permitted variants: Both green arrows may be varied to the type snown in diagram 3001.1 See regulation 31 (6)

SCHEDULE 8 LIGHT SIGNALS FOR THE CONTROL OF VEHICULAR TRAFFIC (contd.)



3011.2 Same as diagram 3011.1 except that the arrows shall be illuminated and extinguished separately.


tem	
1	Regulations: 10(1), 10(2), 31, 33(1)
2	Directions: None
3	Diagrams: None
4	Permitted variants: Both green arrows may be varied to the type shown in diagram 2001.1 See regulation 31(6)



3013 Light signal for the control of tramcars

tem	
1	Regulations: 10(1), 30(9), 30(10), 30(11), 33(5)
2	Directions: 41, 48
3	Diagrams: 1001, 3000.3, 2000.4, 8000.5, 3000.6
4	Permitted variants: Nona

SCHEDULE 8 LIGHT SIGNALS FOR THE CONTROL OF VEHICULAR TRAFFIC (contd.)




→ | ← 20 min 30 max

3013.1 As diagram 3013, conveying the prohibition prescribed by regulation 33(5)(a)

ltern	
1	Regulations: 10(1), 30(9), 30(10), 30(11), 33(5)
2	Directions: None
8	Diagrams: None
4	Permitted variants:


3013.2 As diagram 3013, conveying the indication prescribed by regulation 33(6)(b)

liem	
1	Regulations: 30(9), 30(10), 30(11), 33(5)
2	Directions: None
8	Diagrams: None
4	Permitted variants: None



3013.3 As diagram 3013, conveying the indication prescribed by regulation 33(5)(c)

ltem	
1	Regulations: 30(9), 30(10), 30(11), 33(5)
2	Directions: None
3	Diagrams: None
4	Permitted variants: None



3013.4 As diagram 3013, conveying the indication prescribed by regulation 33(5)(d)

item	
1	Regulations: 30(9), 30(10), 30(11), 33(5)
2	Directions: None
3	Diagrams: None
4	Permitted variants: None

ltem


ł


2

3

4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.




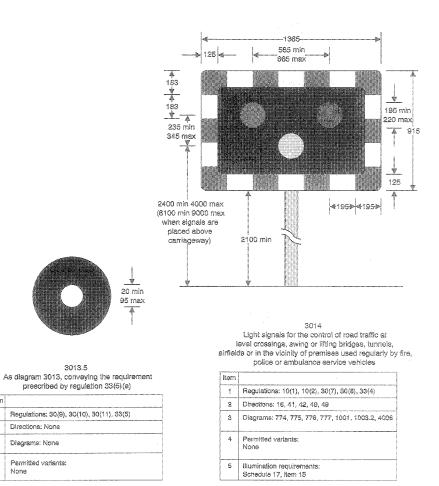


SCHEDULE 9

Regulations 37-40

LIGHT SIGNALS FOR PEDESTRIANS AND ANIMAL CROSSINGS

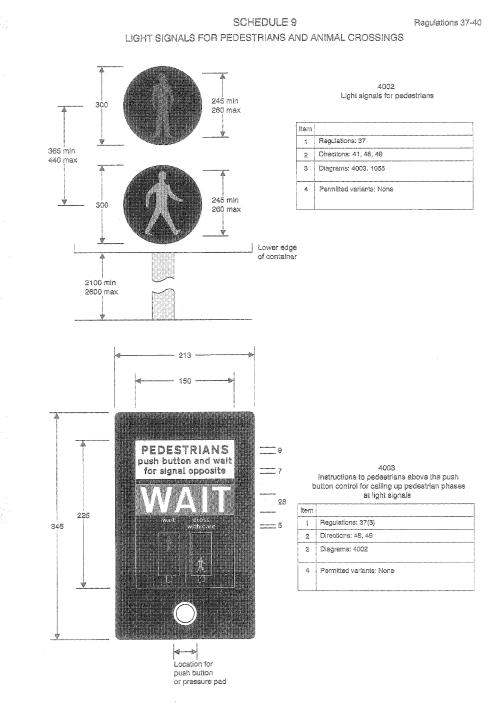




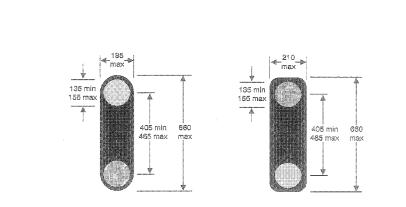

SCHEDULE 9 LIGHT SIGNALS FOR PEDESTRIANS AND ANIMAL CROSSINGS (contd.)

4004 Children likely to be crossing the road on their way to or from school ahead (Alternative types)

item	
1	Regulations: 39(2)
2	Directions: 18, 25, 41, 48, 49
3	Diagrams: 545, 546, 547.1
4	Permitted variants: Container may be coloured grey

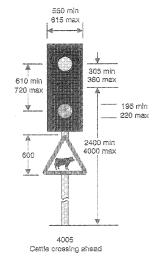

ltem	
1	Regulations: 40
2	Directions: 19, 41, 48, 49
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17 item 4 (in respect of warning sign)

SCHEDULE 9 LIGHT SIGNALS FOR PEDESTRIANS AND ANIMAL CROSSINGS (contd.)



4006 Light signal at level crossings for pedestrians

ltem	
1	Regulations: 38
2	Directions: 41, 48, 49
3	Diagrams: 1003.2, 3014
4	Permitted variants: None


Document Generated: 2023-07-10

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE 10


Regulation 34


PART I

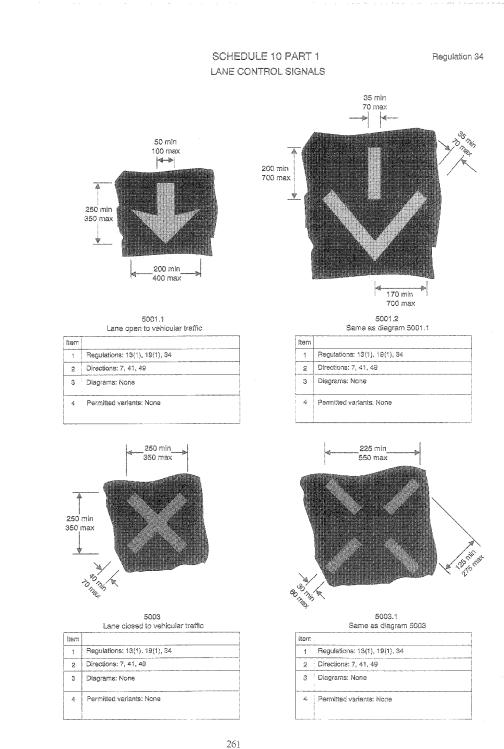

LANE CONTROL SIGNALS

SCHEDULE 10 PART 1 LANE CONTROL SIGNALS (contd.)





5005 Lane closed ahead and vehicular traffic should move to the next lane on the left

ltem	
î	Regulations: 13(1), 19(1), 34
2	Directions: 7, 41, 49
3	Diagrams: None
4	Permitted variants: None

5005.1 Same as diagram 5005

ltern	
4	Regulations: 13(1), 19(1), 34
2	Directions: 7, 41, 49
3	Diagrams: None
4	Permitted variants: None

262

Regulation 11(1)


PART II

LANE CONTROL SIGNS

SCHEDULE 10 PART II Regulation 11(1) LANE CONTROL SIGNS Lane control on Lane control 75 min -150 max----signals ahead main road ahead lane open lane open lane closed lane closed move to left ----- 75 min move to left - 150 max 5010 5011

Lane control light signals ahead as shown in diagrams 5001.1, 5003 and 5005 or diagrams 5001.2, 5003.1 and 5005.1


item	
ź	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: The diagonal white arrow symbol and the words "Move to the left" shall be omitted where the signals shown in diagram 6006 or 5005.1 are not used in the lane control system.
5	liumination requirements: Schedule 17, item 1





5012 System of lane control signals ahead

ltern	
1	Regulations: None
2	Directions: None
з	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



5013 Direction of a system of lane control light signals

Itern	
1	Regulations: None
2	Diractions: None
3	Diagrame: None
4	Permitted variants: Schedule 16, item 13
5	Illumination requirements: Schadule 17, item 4

SCHEDULE 10 PART II LANE CONTROL SIGNS (contd.)





.

5014 Distance to and direction of a system of lane control light signals

ltem	
1	Regulations: None
2	Directions: None
3	Diagrams: Nona
4	Permitted variants:Schedule 18, Items 6, 13
5	Illumination requirements: Schedule 17, item 4

5015 End of a system of lane control light signals

Regulations: 34(4)
Directions: None
Diagrams: None
Permitted variants: None
Illumination requirements; Schedule 17, item 4


SCHEDULE 11

Regulation 36

PART I


MATRIX SIGNS


(for motorways and dual carriageway roads)

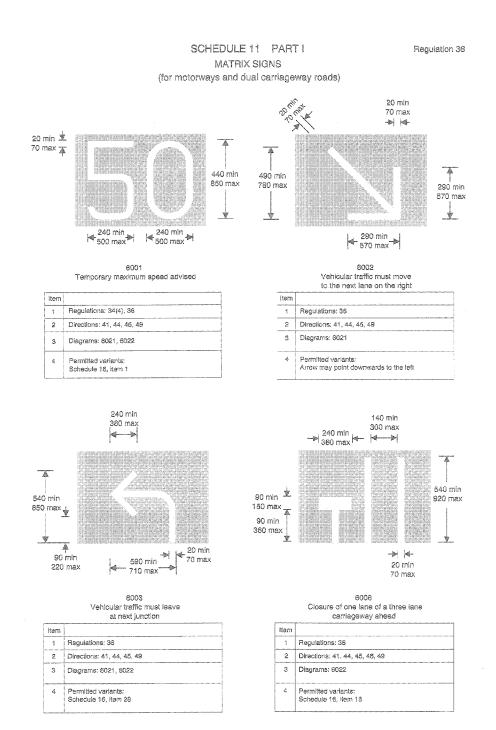


265


SCHEDULE 11 PART ! MATRIX SIGNS (contd.)









ltem	
1	Regulations: 36
2	Directions: 41, 44, 45, 48, 49
3	Diagrems: 6022
4	Permitted variants: Schedule 15, item 15












ltem	
1	Regulations: 36
2	Directions: 41, 44, 45, 46, 49
3	Diagrams: 6022
4	Permitted variants: Schedule 16, item 16







ltem	
١	Regulations: 36
2	Directions: 41, 44, 46, 49
3	Diagrams: 8031.1, 8032.1
4	Parmitted variants: None

SCHEDULE 11 PART I MATRIX SIGNS (contd.)

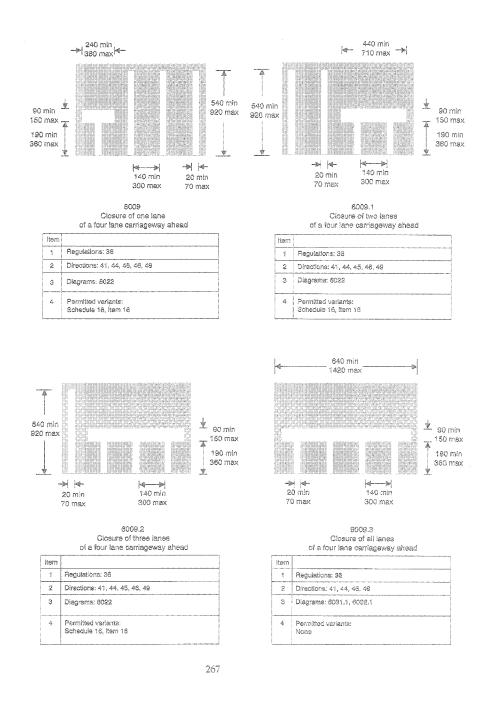


SCHEDULE 11 PART I MATRIX SIGNS (contd.)

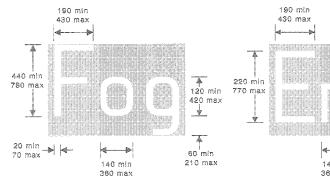




6011 Risk of fog ahead



ltem	
1	Regulations: 38
2	Directions: 41, 44, 45, 49
3	Diagrams: None
4	Permitted variants: None


SCHEDULE 11 PART I MATRIX SIGNS (contd.)

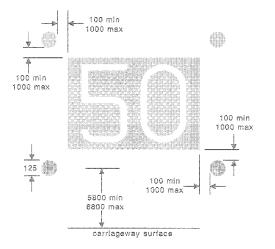


6021 Gantry mounted signal with flashing amber lamps for displaying the signs shown in diagrams 6001, 6002, 6003 or 6011

ltem	
1	Regulations: 36
2	Directions; 41, 44, 46, 49
3	Diagrams: 6001, 6002, 6003, 6011
4	Permitted variants: "50" maybe varied to any of the legends shown in diagrams 6001. 6002, 6003 or 6011

SCHEDULE 11 PART | MATRIX SIGNS (contd.)

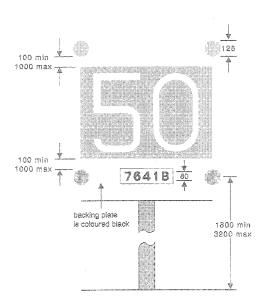



2	Directions: 41, 44, 46, 49	
3	Diagrams: 6001, 8003, 6006, 6005.1, 6008, 8009, 8009.1, 6009.2, 6011,	
4	Permitted variants: "50" may be varied to any of the legends shown in diagrams 6001, 6003, 6006, enn6 1, 6008, 6009, 6009, 1, 6009,2 or 6011	


Regulations 30 and 35

PART II

LIGHT SIGNALS

(for motorways and dual carriageway roads)


SCHEDULE 11 PART II LIGHT SIGNALS (for motorways and dual carriageway roads) Regulations 30 and 35




6023 Light signal conveying the warning prescribed in regulation 35

item	
1	Regulations: 35
5	Directions: 41, 44, 49
3	Diagrama: None
4	Permitted variants: None



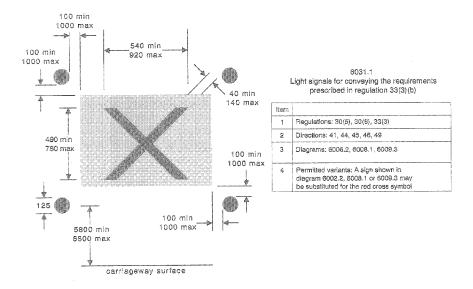

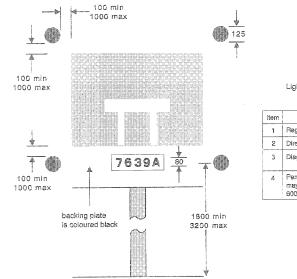

6032.1
ight signals conveying the requirements
prescribed in regulation 33(3)(a)

1	Regulations: 30(5), 30(6), 33(3)
2	Directions: 41, 44, 45, 46, 49
3	Diagrams: 6006.2, 6009.3
4	Permitted variants: The diagram 6008.1 symbol may be varied to the symbol shown in diagram 6006.2 or 6009.3

SCHEDULE 12

Regulation 11(1)

PART I

MISCELLANEOUS WARNING, INFORMATORY AND REGULATORY SIGNS FOR ROAD WORKS


Regulation 11(1)

SCHEDULE 12 PART I MISCELLANEOUS WARNING, INFORMATORY AND REGULATORY SIGNS FOR ROAD WORKS




7001 Road works or temporary obstruction of the carriageway shead


ltem	
1	Regulations: 14, 42
2	Directions: 9, 19, 31
3	Diagrams: 570, 572, 573, 645, 7001.1, 7001.2, 7021
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1



1	Regulations: None
2	Directions: 19, 31
3	Diegrams: 7001
4	Permitted variants: Schedule 16, litem 20 Direction may be varied or omitted and "On" added before route number
5	litumination requirements: Schedule 17, item 8

	Line painting			
	(100) (125) (150)			
	7001.1 Nature of road works			
	Nature of Tozo works			
tem				
1	Regulations: 14			
2	Directions: 19, 31			
Э	Diagrams: 7001			
4	Diagrams: 7001 Permitted variants: 'Line painting' may be shown on two lines or varied to: 1. 'Graas cutting' 2. 'Tree cutting' 4. 'Ditching' 5. 'Weed spraying' 6. 'Sign erection' 7. 'Sign memberance' 8. 'Ughting maintenance' 8. 'Ughting maintenance' 8. 'Overhead works' 10. 'On slip road' 11. 'Surveying' 12. 'Mobile road works' 13. 'Road sweeping' 14. 'Gully emptying' 15. 'Griting' 16. 'Sating' 16. 'Sating' 17. 'Snow ploughing' 18. 'Bianter'			
5	19. "On hard shoulder" Iliumination requirements: Schedule 17, item 8			

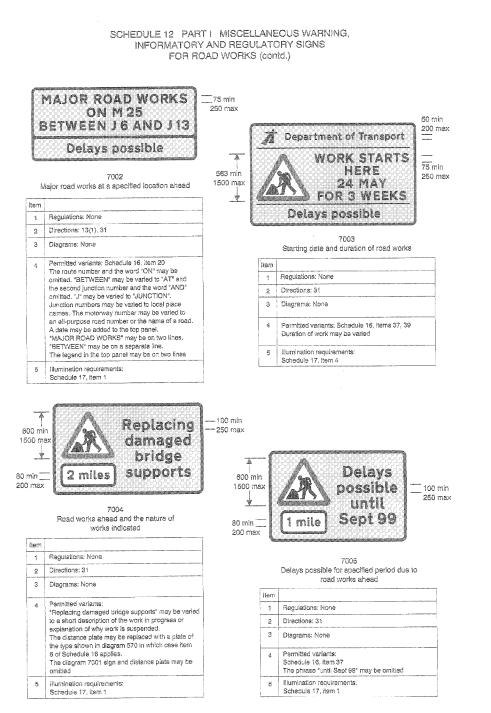

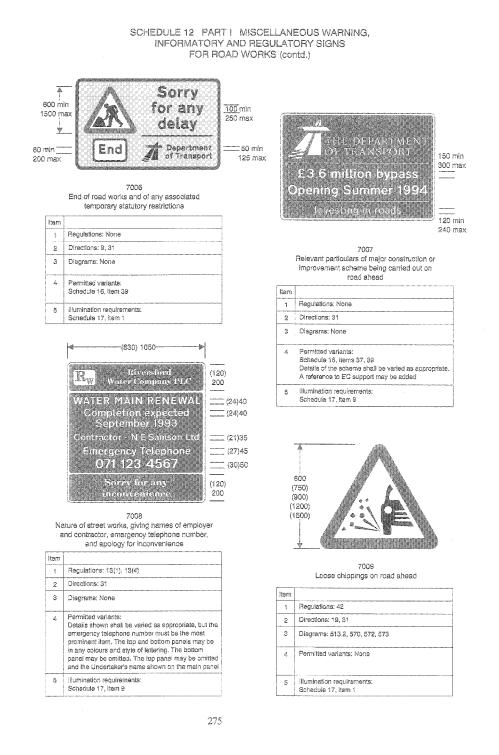


SCHEDULE 12 PART I MISCELLANEOUS WARNING, INFORMATORY AND REGULATORY SIGNS FOR ROAD WORKS (contd.)



7010

Vehicular traffic should proceed slowly owing to temporary hazard resulting from wet tar on the road

ltern	
1	Regulations: 42
2	Directions: 31
3	Diagrams: None
4	Permitted variants: "SLOW WET TAR" may be varied to: 1. "RAMP AHEAD" 2. "ROAD AHEAD CLOSED" 3. "ROAD CLOSED" (name of road may be substituted for "ROAD") 4. "TEMPORARY ROAD SURFACE" 5. "TRAFFIC CONTROL AHEAD" 6. "TRAFFIC SIGN MAINTENANCE" 7. "TRAFFIC SIGN MAINTENANCE" 8. "WORK IN CENTRE OF ROAD"
5	Illumination requirements: Schedule 17, Item 1



7011 7011 Point beyond which vehicular traffic must not proceed when required to stop by regulation 33 in accordance with the indication given by the portable light signals shown in diagram 3000.1 and when the road marking shown in diagram 1001 is not placed on the carriageway tiem 1 Regulations: 33 Directions: 31 2 3 Diagrams: 3000.1, 7023 Permitted variants: "RED LIGHT" may be varied to "STOP SIGN" 4


5	Biumination requirements:	
ų	Schedule 17, item 1	



7012 Temporary absence of road markings

ttem	
1	Regulations: 42
2	Directions: 31
3	Diagrams: None
4	Permitted variants: Schedule 16, item 6 "NO ROAD MARKINGS FOR 2 MILES" may be varied to: 1. "NO GIVE WAY MARKINGS" 2. "NO STOP WARKINGS" 3. "NO ROAD MARKINGS AT JUNCTION" 5. "NO ROAD MARKINGS AT LEVEL CROSSING"
5	illumination requirements: Schedule 17, item 1

SCHEDULE 12 PART 1 MISCELLANEOUS WARNING, INFORMATORY AND REGULATORY SIGNS FOR ROAD WORKS (contd.)



7013 Temporary sudden change in level of carriageway surface

item

3

4

1 Regulations: 42 2 Directions: 31

Diagrams: None

Permitted variants: None

5 Illumination requirements: Schedule 17, item 1



7014 Permanent change in road layout ahead

ltem	
1	Regulations: None
2	Directions: 31, 32
3	Diagrams: None
4	Permitted variants: Schedule 16, item 3 "NEW ROUNDABOUT" may be varied to: 1. "CHANGED PRIORITIES" 2. "GAP CLOSED" 3. "NEW ONE WAY SYSTEM" 4. "NEW ROAD LAYOUT" 5. "NEW TRAFFIC ISLANDS" 6. "NEW TRAFFIC ISLANDS" 6. "NEW TRAFFIC SIGNALS" 7. "SIGNAL PRIORITIES CHANGED" 8. "SIGNAL TIMINOS CHANGED" A distance in yards to the nearest 10 yards may be adde before the word "AHEAD" on a separate line where necessary
5	Illumination requirements: Schedule 17, item 4



7015 Temporary absence of hard shoulder for

distance specified

ltem	
1	Regulations: None
2	Directions: 31
3	Diagrams: None
4	Permitted variants: Schedule 16, item 6 "SHOULDER FOR" may be on two lines. Legend may be varied to "SETTING OUT ROAD WORKS AHEAD"
5	Illumination requirements: Schedule 17, item 4




7016 Zebra or Pelican crossing temporarily out of use (Sign for pedestrians)

item	
1	Regulations: None
2	Diractions: 31
з	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9

277


a da ante de la composición de la comp

SCHEDULE 12 PART I MISCELLANEOUS WARNING, INFORMATORY AND REGULATORY SIGNS FOR ROAD WORKS (contd.)




7017 Direction in which pedestrians should look for approaching traffic (Sign for pedestrians)

ltem	
1	Regulations: None
2	Directions: 31
3	Diagrams: None
4	Permitted variants: "LEFT" may be varied to "RIGHT" or "BOTH WAYS"
õ	Illumination requirements: Schedule 17, item 9



7018 Direction of temporary route for pedestrians (Sign for pedestrians)

ltem	
î	Regulations: None
2	Directions: 81
3	Diagrams: None
4	Permitted variants: Schedule 16, item 12 "USE OTHER FOOTWAY" may be added in the place of the arrow
5	lilumination requirements: Schedule 17, item 9



7019 Light signals ahead not in use

ltem	
1	Regulations: 42
2	Directions: 31
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4




200 max

7020 Variable message sign ahead not in use

anaure	2112229479.0 217	in an leac	norm	129
	or being	tested		


itam	
1	Regulations: 42
2	Directions: 31
3	Diagrams: None
4	Permitted variants: "SIGN" may be varied to "SIGNAL" "NOT IN USE" may be varied to "UNDER TEST". The legend may be on three lines
S	Illumination requirements: Schedule 17, item 4

SCHEDULE 12 PART I MISCELLANEOUS WARNING, INFORMATORY AND REGULATORY SIGNS FOR ROAD WORKS (contd.)



7021 Traffic on road ahead is being controlled by portable light signals (Indication to traffic joining that road)

ltem	
1	Regulations: 42
2	Directions: 19, 31
3	Diagrams: 7001
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 3




7023 Vehicular traffic must not proceed into a length of road where one-way working is temporarily necessary (Manually operated sign)

ltem		
1	Regulations: 10(1), 46(6)	
2	Directions: 31, 34(1)	
3	Diagrams: 7011, 7024	
4	Permitted variants: None	
5	Illumination requirements: Schedule 17, Item 5	



7022 Traffic joining a length of road being controlled by portable light signals is not controlled by such signals

Item	·
1	Regulations: 42
2	Directions: 19, 31
3	Diagrams: 562
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 3



7024 Vehicular traffic may proceed into a length of road where one-way working is tamporarily necessary (Manually operated sign)

ltem	
1	Regulations: 46(6)
2	Directions: 31, 34(1)
3	Diagrams: 7023
4	Permitted variants: None
5	litumination requirements: Schedule 17. item 5


279

Regulation 11(1)

PART II


ROAD WORKS DELINEATORS AND BARRIERS


SCHEDULE 12 PART II ROAD WORKS DELINEATORS AND BARRIERS Regulation 11(1)



7101 Edge of a route for vehicular traffic through or past a temporary obstruction (Traffic cone)

ltern	
1	Regulations: 44(1), 44(2)
2	Directions: 31, 37
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 16






Plan view of base



ltem	
1	Regulations: 11(2), 44(3)
2	Directions: 31, 37
3	Diagrams: None
4	Permitted variants: None
6	Illumination requirements: Schedule 17, item 16



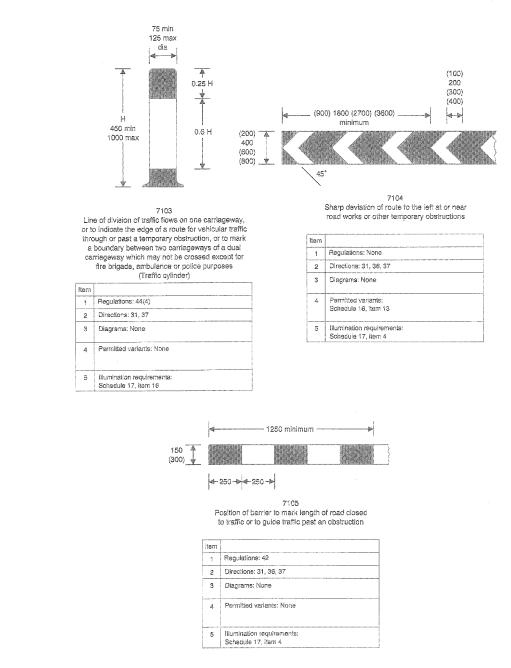

SCHEDULE 12 PART II ROAD WORKS DELINEATORS AND BARRIERS (contd.)


281


Regulation 11(1)

PART III

SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS


SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS Regulation 11(1)








ltem 1	Top panel	None	7262	7263	7264
item 2	Bottom panels	7270 7273 7275 None	7270 7271	7271 7273 None	7271 7273 7275 None



7202 Flight hand two lanes of a four lane dual carriageway closed to traffic ahead


ltem	
1	Regulations: 12(8)
2	Directions: 19, 31
3	Diagrams: 7208
4	Permitted variants: Schedule 16, Item 16
5	iliumination requirements: Schedule 17, Item 1



7203 Two lanes of carriageway open with off side contra-flow working


ltem	
i	Regulations: 12(8)
2	Directions: 19, 31
3	Diagrams: 7209
4	Permitted variants: Schedule 16, item 16
5	Iliumination requirements: Scheduls 17, item 1

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)




7203.1 Two lanes open to traffic, one of which uses the hard shoulder, with off side contra-flow working

ltem		
1	Regulations: 12(8)	
2	Directions: 7, 19, 31	
з	Diagrams: 7209	
4	Permitted variants: Schedule 16, item 16	
õ	Illumination requirements: Schedule 17, item 1	




7204 Two lanes open to traffic one of which uses the hard shoulder

item	
į	Regulations: 12(8)
2	Directions: 7, 19, 31
3	Diagrams: 7209
4	Permitted variants: Sohedule 1S, item 16
5	Illumination requirements: Schedule 17, item 1



Centre iane of a three lane single carriageway road closed with traffic on the off side of the works travelling in the opposite direction


ltem	
1	Regulations: 12(8)
2	Directions: 19, 31
3	Diagrams: 7208
4	Permitted variants: Schedule 15, Item 16
5	Illumination requirements: Schedule 17, item 1




7205 Two lanes of carriageway open ahead

item	
1	Regulations: 12(8)
2	Directions: 19, 31
3	Diegrams: 7209
4	Parmitted variants: Schedule 16, item 16
5	Illumination requirements: Schedule 17, frem 1

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)



⁷²⁰⁷ Right hand lane of a three lane dual carriageway closed ahead, traffic may use left hand lanes and hard shoulder now





7208 Distance ahead at which conditions indicated by signs shown in the diagrams in item 3 of the table start to apply


hem	
1	Regulations: None
2	Directions: 19, 31
3	Diagrams: 7202, 7206, 7207
4	Permitted variants: Schedule 16, item 6 The legend may be on two lines
5	Illumination requirements: Schedule 17, item 8




7209 Distance over which conditions indicated by signs shown in the diagrams in item 3 of the table will apply

ltem	
1	Regulations: None
2	Directions: 19, 31
3	Diagrams: 7203, 7203.1, 7204, 7205
4	Permitted variants: Schedule 16, item 6 The legend may be on one line
5	Illumination requirements: Schedule 17, item 8

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)

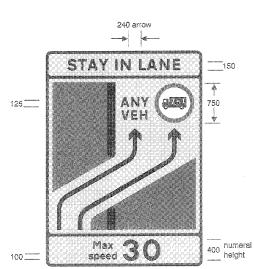



7210 Diversion of two traffic lanes to the other carriageway, with heavy goods vehicles prohibited from the right hand lane

ltem	
1	Regulations: 12(8)
2	Directions: 7, 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, frams 16, 41
5	Illumination requirements: Schedule 17, item 1

Table of combinations

item 1	Top panel	None	7263	7284
ltern 2	Botiom panels	7271 7275 Nona	7271 7274 7275 None	7271 7275 None


7211

Diversion of the two lanes open to traffic; the left hand lane uses the hard shoulder, and the right hand lane goes to the other carriageway

ltem	
٦	Regulations: 12(6)
2	Directions: 7, 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 41
5	Illumination requirements: Schedule 17, item 1

Table of combinations

item 1	Top panel	Nona	7260	7262	7263	7264
item 2	Bottom panels	7271	7272 7274 7275 None	7271	7271	7271

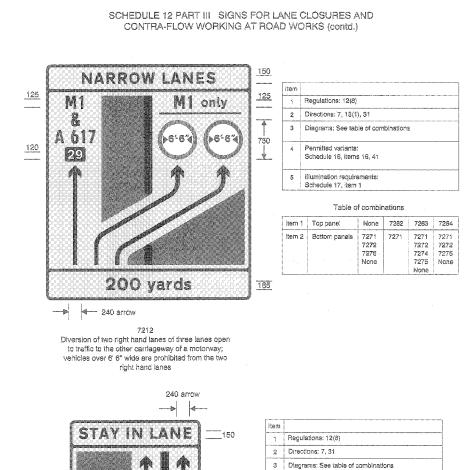

400 numeral height



Table of combinations


item 1	Top panel	None	7262	7263	7264
ltem 2	Bottom panels	7271 7272 7275 None	7271	7271 7272 7274 7275 None	7271 7272 7275 None

7213 Diversion of two lanes open to traffic; the left hand lane moves to the right hand side of the carriageway, and the right hand lane goes to the other carriageway

Max 3 speed

100

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)




7214 Diversion of left hand lane from original carrlageway to join right hand lane already diverted to the other carrlageway


	oundgowdy
ltem	
1	Regulations: 12(8)
2	Directions: 7, 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 41
5	Illumination requirements: Schedule 17, item 1

Table of combinations

ltern 1	Top panel	None	7263	7264
ltern 2	Bottom panels	7271 7272 7275 None	7271 7272 7274 7275 None	7271 7272 7275 None



7218 Right hand lane returns to right hand side of original carriageway ahead, but remains separated by works area from left hand lane



7215 Two lanes open to traffic return to original carriageway

ltem	
1	Regulations: 12(8)
2	Directions: 7, 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 41
ā	illumination requirements: Schedule 17, item 1

Table of combinations


item 1	Top panel	None	7263	7264
item 2	Bottom panels	7271 7275 None	7271 7274 7275 None	7271 7275 None

ltem	
1	Regulations: 12(8)
2	Directions: 7, 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 41
5	Illumination requirements: Schedule 17, item 1

Table of combinations

ltem 1	Тор рале!	None	7263	726
itern 2	Bottom panels	7271 7275 None	7271 7274 7275 None	727 727 Non

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)




7217 Left hand lane returns from right hand side of original carriageway to left hand side ahead and right hand iane returns from other carriageway to right hand side of original carriageway


ltem	
1	Regulations: 12(8)
2	Directions: 7, 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 41
5	Illumination requirements: Schedule 17, item 1

Table of combinations

Item 1 1	l'op panel	None	7263	7264
Item 2 B	Sottom panels	7271 7275 None	7271 7274 7275 None	7271 7275 None



7220 Destinations reached from a junction where traffic is in contra-flow on other carriageway of a motorway



7218

Left hand lane returns from other carriageway to original carriageway ahead; right hand lane continues on other carriageway

ltem	
1	Regulations: 12(8)
2	Directions: 7, 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 41
5	Illumination requirements: Schedule 17, item 1

Table of combinations


ltern 1	Top panel	None	7262	7263	7284
ltern 2	Bottom penels	7271 7272 7275 None	7271	7271 7272 7274 7275	7271 7272 7275 None

ltem	
1	Regulations: 12(8)
2	Directions: 7, 18(1), 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 20, 41 Place names may be added to the route number.
5	flumination requirements: Schedule 17, Item 1

Table of combinations

ltem 1	Top panel	None
item 2	Bottom paneis	7270 7271 None

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)

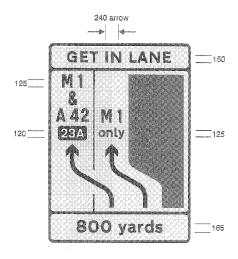

7221 Sharp bends ahead where traffic is diverted onto a temporary road for a short distance

Item	
1	Regulations: 12(8)
2	Directions: 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 26, 41
5	Illumination requiremente: Schedule 17, item 1

Table of combinations

Item 1	Top panel	None	7262	7263	7264
Item 2	Bottom panels	7271 7275 None	7271	7271 7274 7275 None	7271 7275 None


7230 Diversion of traffic from 19ft and centre lanes of a motorway carriageway to use hard shoulder and left hand lane; hard shoulder is to be used by traffic leaving at the liuncian spacified

	junction specified
ltem	
1	Regulations: 12(6)
2	Directions: 7, 13(1), 31
3	Diagrams: See table of combinations
4	Pennitted variants: Schedule 16, items 16, 41
5	Illumination requirements: Schedule 17, item t

Table of combinations

ltern 1	Top panel	None	7280	7262	7283	7284
ltem 2	Bettom panels	7271	7272 7274	7271	7271	7271
		1	7275			
			None			

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)




7231 Return of traffic from hard shoulder and left lane of carriageway to left and centre lanes

ltem	
1	Regulations: 12(8)
2	Directions: 7, 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 18. Items 15, 41
5	Illumination requirements: Schartula 17 fram 1

Table of combinations

Item 1	Top panel	Nona	7261	7262	7283	7284
item 2	Bottom panels	7271	7272 7274 7275 None	7271	7271	7271




7232 Return of traffic from hard shoulder and left lane of carriageway to use three lanes


ltem	
1	Regulations: 12(8)
2	Directions: 7, 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 41
5	Illumination requirements: Schedule 17, item 1


Table of combinations

Item 1	Top panel	None	7261
item 2	Bottom panels	7271	7272 7275 None



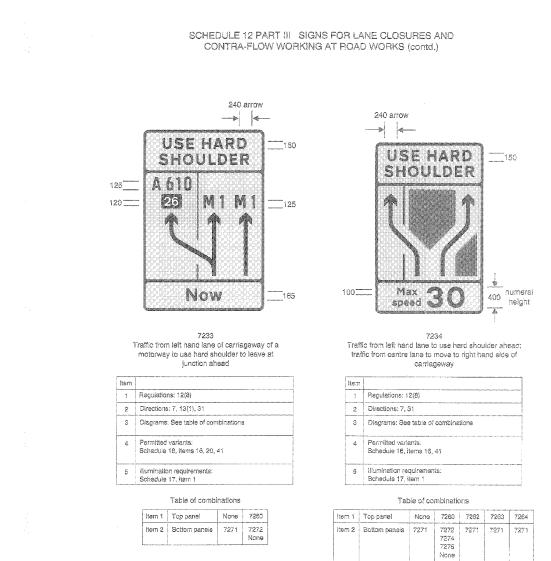

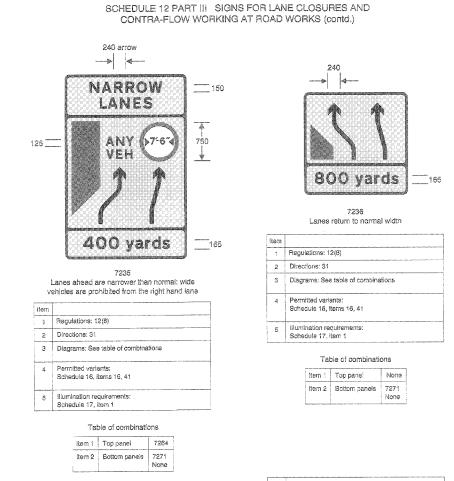



7237
Diversion of traffic from left and centre lanes
to centre and right hand lanes





Table of combinations

item 1	Top panel	None	7263	7264
Item 2	Bottom panels	7271 7275 None	7271 7274 7275 None	7271 7275 None

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)




7238 Diversion of traffic from centre lane to right hand lane; traffic in the left hand lane is unaffected


ltem	
1	Regulations: 12(8)
2	Directions: 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 41
5	Illumination requirements: Schedule 17, item 1

Table of combinations

item 1	Top panel	None	7262	7288	7284
Item 2	Bottom panels	7271 7272 7275 None	7271	7271 7272 7274 7275 None	7271 7272 7275 None



7240 Destination reached from a junction where permanent sign is obscured by presence of road works on an all-purpose road



7239 Traffic diverted into right hand lane to rejoin centre lane

Item	
1	Regulations: 12(8)
2	Directions: 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16. Items 16, 41
5	Illumination requirements: Schedule 17. Rem 1

Table of combinations


Nem 1	Top panel	None	7263	7264
Item 2	Bottom panels	7271 7272 7275 None	7271 7272 7274 7275	7271 7272 7275 None
		None		275 Ione

tem	
1	Regulations: 12(8)
2	Directions: 12(3), 31
3	Diagrams: See table of combinations
4	Permitted variants: Schedule 16, items 16, 20, 41
5	illumination requirements: Schedule 17, item 1

Table of combinations


item 1	Top panel	None
item 2	Bottom paneis	7270 7271 None

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)




7250 Near side traffic lane diverges from main carriageway at a junction as part of temporary traffic management scheme

ltem	
1	Regulations: 12(8)
2	Directions: 19, 31
3	Diagrams: 7256
4	Permitted variants: Sohedule 16, item 16
5	illumination requirements: Schedule 17, Item 1



7251 Additional traffic lanes joining from the right at a junction as part of temporary traffic management scheme

ltem	
1	Regulations: 12(8)
2	Directions: 19, 31
3	Dlagrams: 7256
4	Permitted variants: Schedule 16, Item 16
5	illumination requirements: Schedule 17, item 1




7252

Traffic joining from the left at a junction as part of temporary traffic management scheme. Traffic on the main carriageway has priority

item	
1	Regulations: 12(3)
2	Directions: 19, 31
3	Diagrams: 7256
4	Permitted variants: Schedule 16, item 16
õ	Illumination requirements: Schedule 17. item 1



SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)




7253

Traffic joining main carriageway at a junction as part of temporary traffic management scheme; traffic on the main carriageway has priority


ltem	
1	Regulations: 12(8)
2	Directions: 19, 31
3	Diagrams: 7256
4	Permitted variants: Schedule 16, item 16
ö	(llumination requirements: Schedule 17, item 1

(240) 320 (400) |**⊲−**▶|




7255 Additional traffic iane available at a junction as part of temporary traffic management scheme

ltem		
1	Regulations: 12(8)	
2	Directions: 19, 31	
3	Diagrams: 7256	
4	Permitted variants: Schedule 16, item 16	
5	Iliumination requirements: Schedule 17, item 1	



7254 Additional traffic lane joining from the left at a junction as part of temporary traffic management


item	
1	Regulations: 12(8)
2	Directions: 19, 31
3	Diagrams: 7256
4	Permitted variants: Schedule 16, item 18
ő	Illumination requirements: Schedule 17, Item 1



7258 Distance ahead at which the change in road layout occurs

ltem	
1	Regulations: 12(8)
2	Directions: 19, 31
3	Dir ns: 7250, 7251, 7252, 7253, 7254, 7255
4	Permitted variants: Schedule 16, item 8
5	Illumination requirements: Schedula 17, item 8

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)





7260 Panel to appear at top of road works sign allowing traffic to use hard shoulder as indicated on main part of sign

ltern	
1	Regulations: None
2	Directions: 7, 31
3	Diagrams: 7211, 7230, 7233, 7234
4	Permitted variants: Lagend may be shown on one line
5	Illumination requirements: Schedule 17, item 1

7261 Panel to appear at top of road works sign instructing traffic using hard shoulder to rejoin main carriageway

item	
1	Regulations: None
2	Directions: 7, 31
3	Diagrams: 7231, 7232
4	Permitted variants: Legend may be shown on one line
5	Illumination requirements: Schedule 17, item 1

GET IN LANE

7262 Panel to appear at top of road works sign instructing traffic to get into the appropriate lane as indicated on main part of sign

item	
1	Regulations: None
2	Directions: 7, 31
3	Diagrams: 7201, 7211, 7212, 7213, 7218, 7221, 7230, 7231, 7234, 7238
4	Permitted variants: Legend may be shown on two lines
5	Illumination requirements: Schedule 17, item 1



7263 Panei to appear at top of road works sign instructing

troffic to	romain in	appropriate	Inne	
HOUSE CO	100030000000000000000000000000000000000	ahorohitara	102110	

item	
ĭ	Regulations: None
2	Directions: 7, 31
3	Diagrams: 7201, 7210, 7211, 7212, 7213, 7214, 7215, 7216, 7217, 7218, 7221, 7230, 7231, 7234, 7237, 7238, 7239
4	Permitted variants: Legend may be shown on one line
5	Illumination regulaements: Schedule 17, item 1

296

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.) NARROW 1 mile LANES 165 7264 7270 Panel to appear at bottom of road works sign indicating distance in miles to junction indicated on signs shown Panel to appear at top of road works sign indicating that traffic lanes are narrower than normal in diagrams in item 3 of the table ltem item 1 Regulations: None 1 Regulations: None Directions: 31 Directions: 31 2 2 Diagrams: 7201, 7210, 7211, 7212, 7213, 7214, 7215, 7216, 7217, 7216, 7221, 7230, 7231, 7234, 7235, 7237, 7238, 7239 3 Diagrams: 7201, 7220, 7240 Э 4 Permitted variants: Permitted variants: "1 mile" may be varied to "2/3 mile" Ľ, Legend may be shown on one line lliumination requirements: Illumination requirements: 5 5 Schedule 17, item 1 Schedule 17, Item 1 200 yards 165 165

7271

Panel to appear at bottom of road works sign indicating distance in yards to point at which condition indicated by signs shown in diagrams in item 2 of the table start to apply


ltem	
1	Regulations: None
2	Directions: 31
3	Diagrems: 7201, 7210, 7211, 7212, 7213, 7214, 7215, 7216, 7217, 7218, 7220, 7221, 7230, 7231, 7232, 7233, 7234, 7235, 7236, 7237, 7238, 7239, 7240
4	Permitted variants: Schedule 16, item 11 "200" may be varied to the appropriate distance to the nearest 50 yards. The legend may be on two lines. "yards" may be varied to "yota"
5	Illumination requirements: Schedule 17, item 1

Now


7272

Panel to appear at bottom of road works sign indicating that the change to the road layout indicated by sign shown in diagrams in item 3 of the table occurs at that point

ltern	
1	Regulations: None
2	Directions: 31
3	Diagrams: 7211, 7212, 7213, 7214, 7215, 7218, 7230, 7231, 7232, 7233, 7234, 7238, 7239
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1

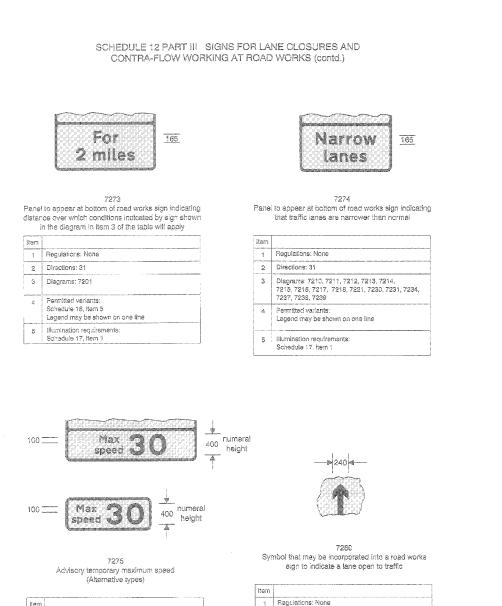

item	
1	Regulations: None
2	Directions: 31
3	Diagrams: 7201, 7210, 7211, 7212, 7213, 7214, 7215, 7216, 7217, 7218, 7221, 7230, 7231, 7232, 7234, 7237, 7238, 7239
4	Permilted variants: Schsdule 16, Item 1
5	Illumination requirements: Schedule 17, item 1



298

2

з

Directions: 31

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)



7281 Symbol that may be incorporated into a road works sign to indicate a fane open to any vehicle

ltem 1

2

3

4

Б

Regulations: None


Diagrams: Same as 7280

Permitted variants: None

illumination requirements:

Directions: 31

Not applicable




-∌|240|∢-

7282

Symbol that may be incorporated into a road works sign to indicate a lane subject to a temporary prohibition on goods vehicles exceeding the maximum gross weight shown


hem	
1	Regulations: None
2	Directions: 7, 31
з	Diagrams: Same as 7290
4	Permitted variants: Same as diagram 622.1A
5	Illumination requirements: Not applicable



7283

Symbol that may be incorporated into a road works sign to indicate a lane subject to a temporary width restriction


item	
1	Regulations: None
2	Directions: 7, 31
3	Diagrams: Same as 7280
Ą	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Not applicable



7284 Symbol that may be incorporated into a road works sign to indicate a lane subject to a temporary height resultion

ltem	
1	Regulations: None
2	Directions: 7, 31
3	Diagrams: Same as 7260
4	Permitted variants; Schedule 16, item 1 The height limit roundel may be varied to the one shown in diagram 629.2A
5	Illumination requirements: Not applicable

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)



7285 Symbol that may be incorporated into a road works sign on an all-purpose road to indicate that a lane

leads to a particular destination

Permitted variants: Schedule 16, item 20

Place names may be added to or substituted for the route number. The angle of the arrow may be varied to point at 45° upwards to the left

lter i

> 2 3


4

5

Regulations: None Directions: 31

Diagrams: Same as 7280

lilumination requirements: Not applicable



7286

Symbol that may be incorporated into a road works sign on a motorway to indicate that a lane leads to a particular destination at the junction shown

ltem	
1	Regulations: None
2	Directions: 31
3	Diagrams: Same as 7280
4	Permitted variants: Schedule 16, item 29 Same as 7285. The angle of the arrow may be varied to 45° pointing upwards to the left
5	illumination requirements: Not applicable



7287 Symbol that may be incorporated into a road works sign to indicate a lane is closed

ltem	
1	Regulations: None
2	Directions: 31
3	Diagrams: 7201
4	Permitted variants: None
5	lliumination requirements: Not applicable




7288

Symbol that may be incorporated into a road works sign to indicate that traffic is moving in the opposite direction to traffic in other lanes which are segregated

ltem	
1	Regulations: None
2	Directions: 31
3	Diagrams: 7201, 7214, 7218
4	Permitted variants: None
5	Illumination requirements: Not applicable

SCHEDULE 12 PART III SIGNS FOR LANE CLOSURES AND CONTRA-FLOW WORKING AT ROAD WORKS (contd.)



7290 Mandatory speed limit ahead at road works


item	
١	Regulations: None
2	Directions: 7, 31
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1 The distance legend may be shown on one line and "m" substituted for "mile"
5	Illumination requirements: Schedule 17, item 1

Regulation 11(1)

PART IV


SIGNS FOR ROAD WORKS ENTRANCES AND EXITS

SCHEDULE 12 PART.IV SIGNS FOR ROAD WORKS ENTRANCES AND EXITS Regulation 11(1)



7301 Temporary access to a construction or road works site


ltem	
1	Regulations: None
2	Directions: S1
3	Diagrams: 506.1
4	Permitted variants: "WORKS ACCESS" may be varied to "WORKS TRAFFIC ONLY" or "NO WORKS TRAFFIC"
5	illumination requirements: Schedule 17, item 4



7303

Direction to be taken by road works or construction traffic at a junction ahead

item	
1	Regulations: None
2	Directions: 31
3	Diagrams: None
4	Permitted variants: Schedule 16, item 12
5	Illumination regulaements: Schedule 17, item 4



7302 • Temporary exit from a construction or road works site

ltem	
4	Regulations: None
2	Directions: 31
3	Diagrams: 506.1
4	Permitted variants: None
5	liumination requirements: Schedule 17, Item 4



— 75 min — 250 max

7304 Direction to be taken by road works or construction traffic at a junction or works entrance ahead

Item	
4	Regulations: None
2	Directions: 31
3	Diagrams: None
4	Permitted variants: Schedule 16, item 12
6	lilumination requirements: Schedule 17, item 4

SCHEDULE 12 PART IV SIGNS FOR ROAD WORKS ENTRANCES AND EXITS (contd.)





100 min 250 max

7305 Direction to be taken by road works or construction traffic at a junction or works entrance

item	
1	Regulations: None
5	Directions: S1
3	Diagrams: None
4	Permitted variants: Schedule 16, item 15
5	Iliumination requirements: Schedule 17, item 4

7306 Direction to be taken by road works or construction traffic to an access to a works site ahead

item	
1	Regulations: None
2	Directions: 31
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 16
5	Illumination requirements: Schedule 17. Item 4



250 max

7307 Exit from a works site ahead

ltem	
r S	Regulations: None
2	Directions: 31
з	Diagrams: None
4	Permitted variants: Schedule 18, item 6
6	liumination requirements: Schedule 17, item 4


303

Regulation 11(1), 14

PART V


SIGNS MOUNTED ON ROAD WORKS VEHICLES

SCHEDULE 12 PART V SIGNS MOUNTED ON ROAD WORKS VEHICLES Regulation 11(1), 14





7401.1 Nature or effect of mobile road works





item

Requistions: 14



ltem	
4	Regulations: 14
2	Directions: 19, 31
s	Diagrams: None
4	Permitted variants: See diagram 7401.1
5	Numination requirements: Schedule 17, item 5


 2
 Directions: 19, 31


 3
 Diagrams: 740 i

 4
 Permitted variants: 'Lane closed ahead' may be varied to: 1. "Surveying' 2. "Line paining' 3. "On hard shoulder" 4. "Weed spraying" 5. "Mobile works" "Laren" may be varied to "Lanes" Legend may be on one line Plate may be enchangular

 5
 Hilumination requirements: Schedule 17, Itom 8

SCHEDULE 12 PART V SIGNS MOUNTED ON ROAD WORKS VEHICLES (contd.)





7402

Lanes closed to traffic ahead by vehicles carrying out mobile road works (Alternative types)

Permitted variants: Schedule 16, item 16 *450 yds* may be varied to an alternative distance to the nearest 50 yards or omitted

ltern 1

2

3

4

5

Regulations: 14


Diagrams: None

Illumination requirements: Schedule 17, Item 5

Directions: 31

2500-

4



7403 Other traffic to keep to the right of vehicles carrying out mobile road works (Alternative types)

item	
1	Regulations: 14, 26(4)
2	Directions: 31
3	Diagrams: None
4	Permitted variants: Arrow may point downwards to the left
5	Illumination requirements: Schedule 17, item 5

305

.

SCHEDULE 12 PART V SIGNS MOUNTED ON ROAD WORKS VEHICLES (contd.)



37.5 min 150 max

7404 Nature of work being done by vehicle working on the highway

 Item

 1
 Regulations: 14

 2
 Directions: 31

 3
 Diagreme: None

 4
 Permitted varients: "HIGHWAY" may be varied to "MOTORWAY"

> illumination requirements: Schedule 17, item 9

5

SCHEDULE 13


Regulation 13(1)

PART I

PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS


(for use on a sign or parts of a sign with red, blue, brown, black or green background and on the signs shown in diagrams 2714 and 2715)


SCHEDULE 13 PART I Regulation 13 (1)
PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS
(for use on a sign or parts of a sign with a red, blue, brown, black or green
background and on the signs shown in diagrams 2714 and 2715)

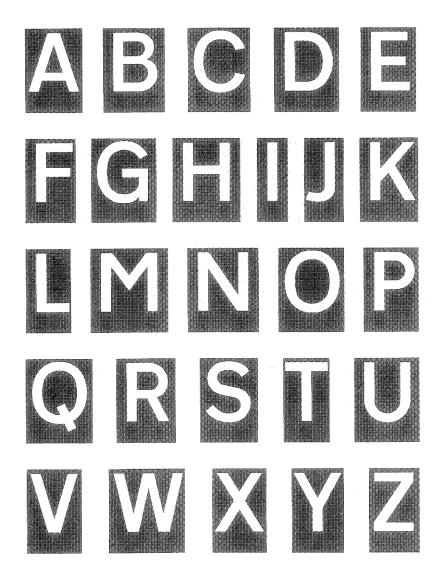

SCHEDULE 13 PART I PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS (contd.)


(for use on a sign or parts of a sign with a red, blue, brown, black or green background and on the signs shown in diagrams 2714 and 2715)

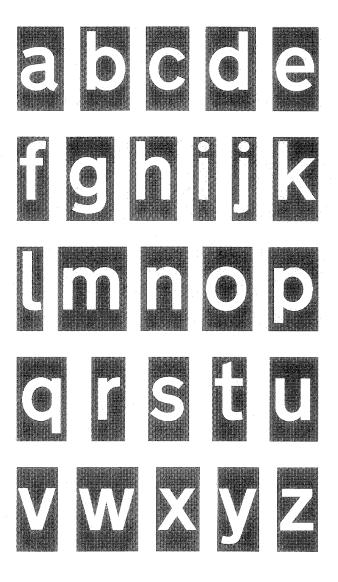

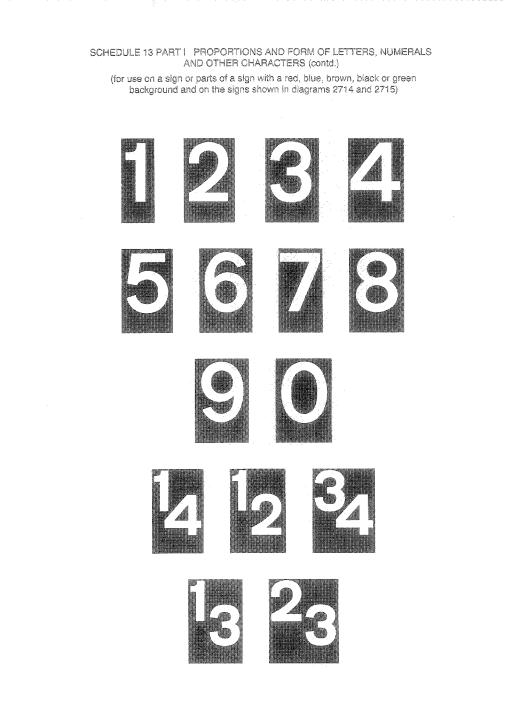

SCHEDULE 13 PART I PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS (contd.)

(for use on a sign or parts of a sign with a red, blue, brown, black or green background and on the signs shown in diagrams 2714 and 2715)

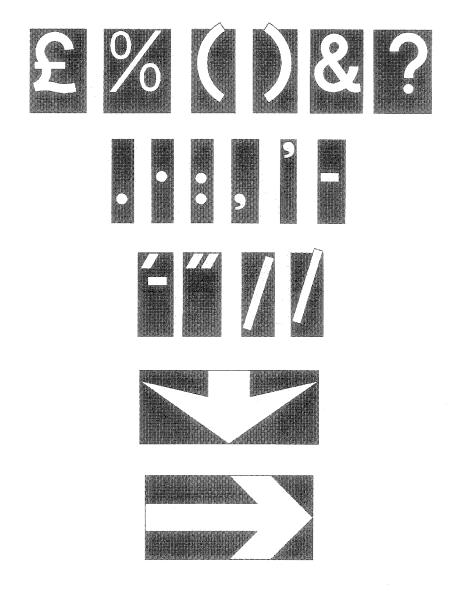

310


Regulation 13(1)

PART II

PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS

(for use on a sign or parts of a sign with a white, yellow or orange background and on the signs shown in diagrams 2714 and 2715)


SCHEDULE 13 PART II Regulation 13 (1)
PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS
(for use on a sign or parts of a sign with a white, yellow or orange
background other than the signs shown in diagrams 2714 and 2715)

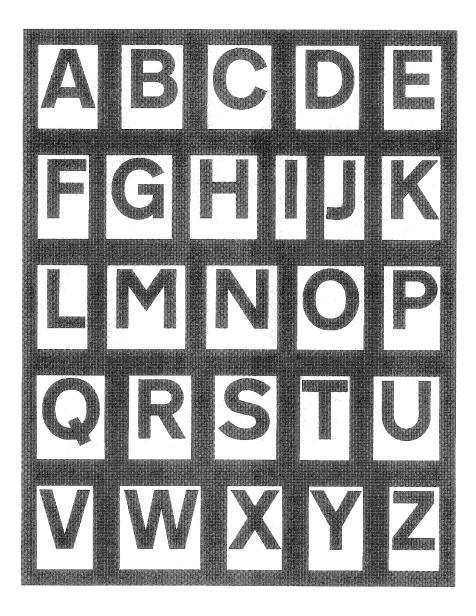


SCHEDULE 13 PART II PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS (contd.)

(for use on a sign or parts of a sign with a white, yellow or orange background other than the signs shown in diagrams 2714 and 2715)

SCHEDULE 13 PART II PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS (contd.)

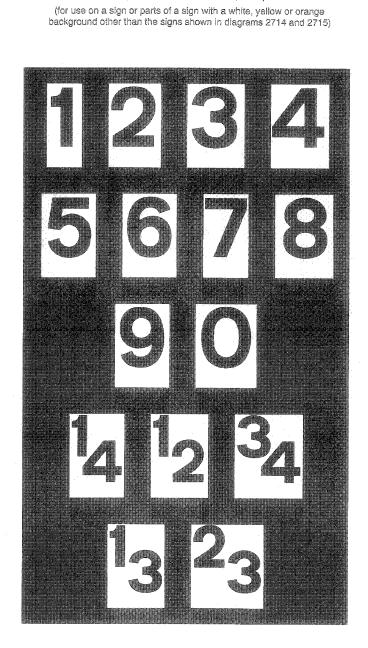

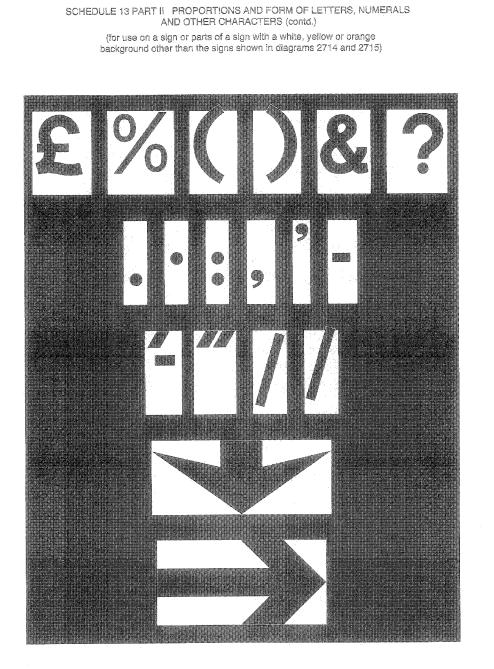


314

Regulation 13(3)

PART III

PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS

(for route numbers on permanent motorway signs with blue backgrounds)

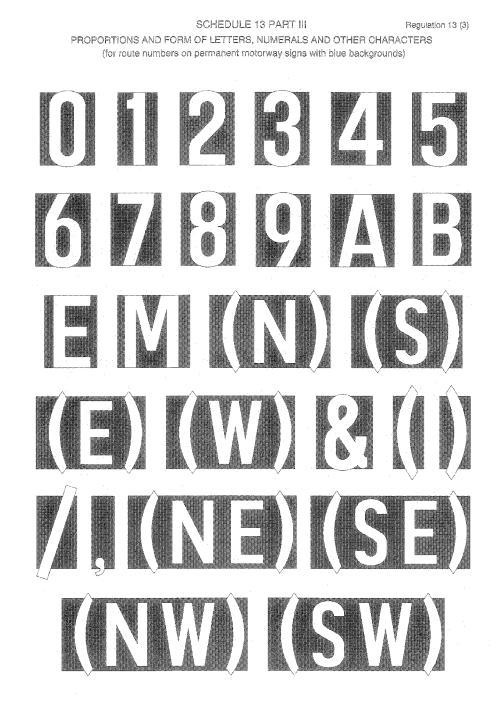


Regulation 13(3)

PART IV

PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS

(for route numbers on temporary motorway signs with yellow backgrounds)

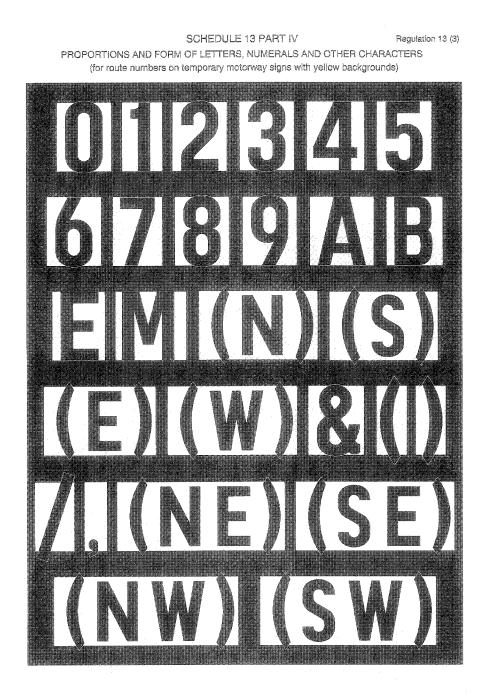


Regulation 13(5)

PART V

PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS FOR USE ON VARIABLE MESSAGE SIGNS

(where the characters shown in Parts I, II, III and IV cannot be used because of the method of construction or operation of the sign)

SCHEDULE 13 PART V Regulation 13(5)
PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER
CHARACTERS FOR USE ON VARIABLE MESSAGE SIGNS
(where the characters shown in Parts I, II, III and IV cannot be used because
of the method of construction or operation of the sign)

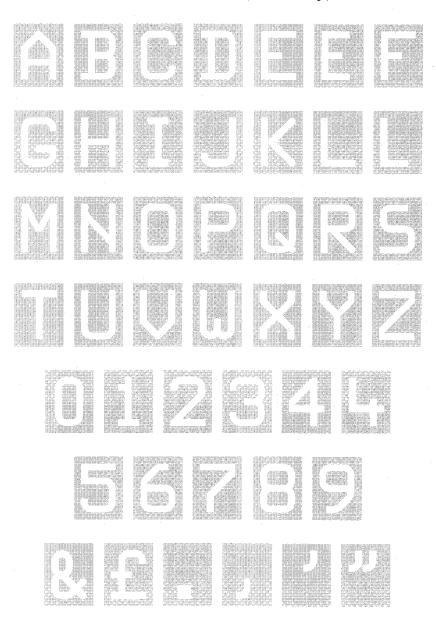

Regulation 13(6)

PART VI


PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS FOR USE IN THE ROAD MARKINGS SHOWN IN SCHEDULE 6

(a) with a height of 1.6 metres)

SCHEDULE 13 PART VI Regulation 13(6) PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS FOR USE IN THE ROAD MARKINGS SHOWN IN SCHEDULE 6 (a) with a height of 1.6 metres ЩĪ 4 **->**|**⊲**-70 See and the second s 1600 H ł 111 h Ø 1 TIT THE ╓ f .11 1 D

(b) with a height of 2.8 metres)

SCHEDULE 13 PART VI Regulation 13(8) PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS FOR USE IN THE ROAD MARKINGS SHOWN IN SCHEDULE 6 (b) with a height of 2.8 metres -- **IP** | -- 70 2800 ļ 350 Â

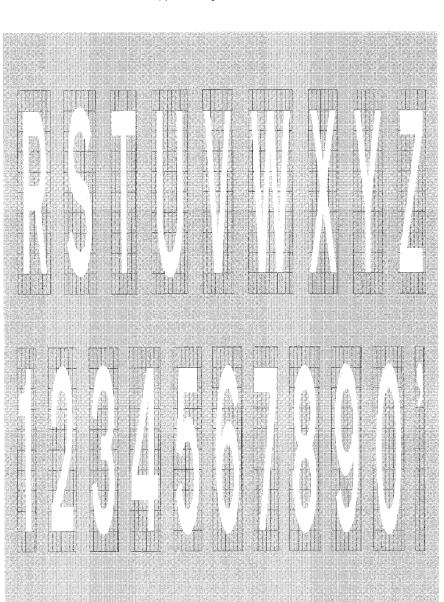

SCHEDULE 13 PART VI PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS FOR USE IN THE ROAD MARKINGS SHOWN IN SCHEDULE 6 (contd.) (b) with a height of 2.8 metres

(c) for use in the road markings shown in diagrams 1027.1, 1028.2, 1028.3, 1028.4, 1029 and 1033

SCHEDULE 13 PART VI Regulation 13(6) PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS FOR USE IN THE ROAD MARKINGS SHOWN IN SCHEDULE 6 (c) for use in the road markings shown in diagrams 1027.1, 1028.2, 1028.3, 1028.4, 1029 and 1033

321

Regulation 13

PART VII

PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS


(Symbols for use on directional signs to indicate diversion routes)

SCHEDULE 13 PART VII Regulation 13 PROPORTIONS AND FORM OF LETTERS, NUMERALS AND OTHER CHARACTERS (Symbols for use on directional signs to indicate diversion routes)










(
68	
00	l naaceoo lii so
11.30	000000000000000000000000000000000000000
99	a metholu Jakala 5-1








SCHEDULE 14

Regulation 13(8)

PART I

PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN ENGLAND, SCOTLAND AND WALES

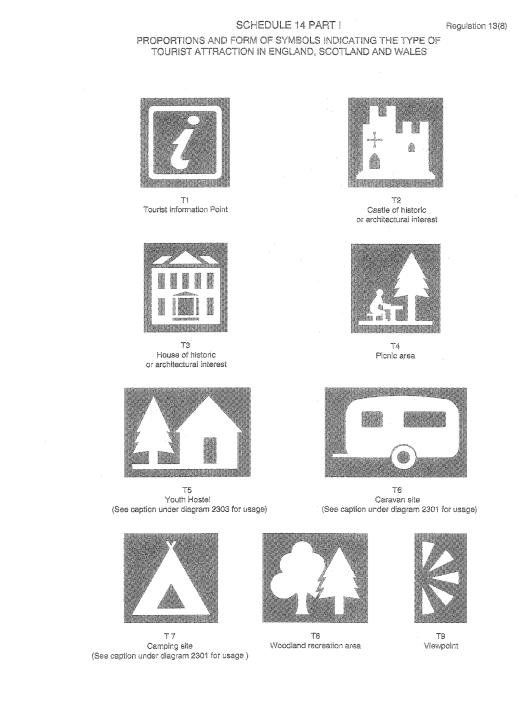

Regulation 13(8)

PART II

PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN ENGLAND AND WALES

SCHEDULE 14 PART II Regulation 13(8) PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN ENGLAND AND WALES




T101 National Trust property



T104 Water sport activities



T107 Wildlife park



T110 Agricultural museum



T102 Flower garden




T105 Church of historic or architectural interest



T108 Windmill of historic or architectural interest




T111 Equestrian centre



T103 Preserved or tourist railway or railway museum



T106 Cathedral of historic or architectural interest



T109 Zoo



T112 Country park

SCHEDULE 14 PART II PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN ENGLAND AND WALES (contd.)



T113 Bird garden



T116 Historic dockyard or attraction of maritime interest




T119 Farm park



T122 Butterfly farm



T114 Pleasure or theme park (Both trees may be of the same type, and either or both trees may be omitted)



T117 Air museum




T120 Pottery or craft centre



T123 Canal-side attraction



T115 Nature reserve



T118 Beach



T121 Prehistoric site or monument



T124 Industrial heritage museum or attraction

SCHEDULE 14 PART II PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN ENGLAND AND WALES (contd.)



T125 Watermill of historic or architectural interest



T126 Aquarium or oceanarium




T127 Site with Roman remains



T128 Shire horse centre




T131 Spa, spring or fountain of particular interest



T129 Motor museum



T132 Farm trail



T130 Craft centre or forge



T133 Vineyard

Regulation 13(8)


PART III

PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN ENGLAND ONLY

SCHEDULE 14 PART III


Regulation 13(8)

PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN ENGLAND ONLY



T201 Tourist attraction recognised by a regional tourist board of the English Tourist Board

Regulation 13(8)



T202 Property in the care of English Heritage



T203 Museum or art gallery

PART IV

PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN SCOTLAND ONLY

SCHEDULE 14 PART IV Regulation 13(8) PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN SCOTLAND ONLY



T301 Tourist attraction recognised by the Scottish Tourist Board (The thistle symbol may be shown in white on a brown sign indicating a National Tourist Route)

Regulation 13(8)



T302 Property in the care of the Historic Buildings and Monuments Directorate



T303 National Trust for Scotland property (The words "National Trust for Scotland" may be added and the symbol varied to white on a brown background)


PART V

PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN WALES ONLY

SCHEDULE 14 PART V PROPORTIONS AND FORM OF SYMBOLS INDICATING THE TYPE OF TOURIST ATTRACTION IN WALES ONLY



T401 Tourist attraction recognised by the Wales Tourist Board



T402 Museum or art gallery

SCHEDULE 15

Regulation 46

Regulation 13(8)

LEGENDS FOR USE ON VARIABLE MESSAGE SIGNS

PART I

SIGNS AUTOMATICALLY ACTIVATED BY VEHICULAR TRAFFIC

1. One of the following legends may be displayed on a sign which is activated automatically by a particular type of vehicle approaching the equipment which controls the sign

- (a) "OVERHEIGHT VEHICLE DIVERT" with
 - (i) an arrow;
 - (ii) "USE" and a route number; or
 - (iii) "FOLLOW" and a symbol shown in Part VII of Schedule 13;
- (b) "OVERHEIGHT VEHICLE TURN BACK";
- (c) "HIGH VEHICLE USE MIDDLE OF ROAD"; or
- (d) "ONCOMING VEHICLE IN MIDDLE OF ROAD".

PART II

LEGENDS GIVING WARNINGS OF ADVERSE WEATHER OR OTHER TEMPORARY HAZARDS

2. A legend shown in an item in column (2) of the Table may be used only in conjunction with one of the legends shown in any item in column (3).In addition one of the legends shown in any item in column (4) may also be displayed. The information indicated in square brackets may be omitted. The number of a motorway junction should be shown on the sign in the format of the letter "J" followed by the number of the junction.

(1) Item	(2) Type of hazard	(3) Location of hazard (for use with any item in column (2))	(4) Additional information (optional-for use with any appropriate combination of items in columns (2) and (3))
1.	"HIGH WINDS"	A route number, including abbreviated compass point directions where appropriate	"[LONG] DELAYS"
2.	"SNOW"	"AT" and a place name, the name of a bridge or tunnel, or a junction name or number	A number and "HR DELAYS"
3.	"FOG"	"AFTER" and a place name, the name of a bridge or tunnel, or a junction name or number	["CARS", "HGV'S", "CARAVANS" or "M'CYCLES"] "USE" and a route number or numbers, including abbreviated compass point directions where appropriate
4.	"FLOODS"	A number and "MILES AHEAD"	["CARS", "HGV'S", "CARAVANS" or "M'CYCLES"] "FOLLOW" and a symbol shown in Part VII of Schedule 13 or a place name
5.	"QUEUE"	"AHEAD"	["CARS", "HGV'S", "CARAVANS" or "M'CYCLES"] and "LEAVE AT NEXT JCT", "LEAVE AT"

Table

(1)	(2)	(3)	(4)
Item	Type of hazard	Location of hazard (for use with any item in column (2))	Additional information (optional-for use with any appropriate combination of items in columns (2) and (3))
			and a junction name or number
6.	"ACCIDENT"		"SLOW DOWN"
7.	"SETTING OUT ROAD WORKS"		

PART III

INFORMATION ON DIVERSION ROUTES

3. One of the legends shown in any item in column (3) of the Table may be used in conjunction with a legend shown in any item in column (2). The information indicated in square brackets may be omitted. The number of a motorway junction should be shown on the sign in the format of the letter "J" followed by the number of the junction.

	I M M M	
(1) Item	(2) Basic Message	(3) Alternative route information (optional-for use with any item in column (2))
1.	A route number, including abbreviated compass point direction where appropriate, or junction name including abbreviated compass point directions where appropriate	"[ALTERNATIVE ROUTE] USE" and a route number or numbers, or number and the word "CLOSED".
2.	"ROAD CLOSED"	"[ALTERNATIVE ROUTE] FOLLOW" and a symbol shown in Part VII of Schedule 13 or a place name
3.	[Name] "BRIDGE CLOSED"	"FOR" and a place name "USE" and a route number or numbers, including abbreviated compass point directions where appropriate
4.	[Name] "TUNNEL CLOSED"	"FOR" and a place name "FOLLOW" and a symbol shown in Part VII of

Table

(1)	(2)	(3)
Item	Basic Message	Alternative route information (optional-for use with any item in column (2))
		Schedule 13 or another place name
5.	"ROAD WORKS"	"LEAVE AT NEXT JCT", "LEAVE AT" and a junction name or number

PART IV

OTHER LEGENDS

- 4. The following legends may also be displayed on a variable message sign
 - (a) "SIGNAL UNDER TEST"
 - (b) "SIGN UNDER TEST"

In either case the message may be used with a pattern displayed which has no particular meaning but which is designed to test the functioning of the sign or signal.

SCHEDULE 16

Regulation 17

PERMITTED VARIANTS

(1)	(2)	(3)
Item	Diagram numbers	Permitted variant
1.	513.2, 523.1, 524.1, 530, 531.1, 532.2, 532.3, 629, 629.1, 629.2, 629.2A, 669.1 (other than in respect of distance), 670, 672, 673, 675, 780, 780.1 (in respect of height), 780.2, 6001, 7275, 7283, 7284, 7290 (in respect of speed limit)	Numerals may be varied but (with the exception of 0.5 tonne and one decimal place of a metre indicating a height, width or length) no fractions or decimal places shall be used.
2.	629, 629.1, 780, 780.1 (in respect of height), 780.2	Metric units to one decimal place of a metre may be substituted for imperial units.
3.	2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2033, 2101, 2102, 2104, 2105, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2118, 2119, 2120, 2121, 2122, 2127, 2131, 2132, 2133, 2134, 2205, 2213, 2214, 2216, 2322, 304	

(1)	(2)	(3)
Item	Diagram numbers 2323, 2504, 2505, 2506, 2507, 2603, 2605, 2606, 2607, 2608, 2609, 2610, 2610.2, 2701, 2705, 2706, 2707, 2801, 2802, 2803, 2804, 2807, 2925	Permitted variant
4.	2911, 2912, 2917, 2918	Numerals indicating distance may be varied with distances being expressed in miles to the nearest mile.
5.	527, 583.1, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2030.1, 2033, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2118, 2119, 2120, 2121, 2122, 2125, 2126, 2127, 2128, 2131, 2132, 2206, 2207, 2209, 2213, 2214, 2309, 2601, 2602, 2705, 2706, 2707, 2803, 2804, 2807, 2925, 2926, 7273	Numerals indicating distance may be varied with distances being expressed in miles except that the fractions ³ / ₄ , ¹ / ₂ and ¹ / ₄ may be used for distances of less than 3 miles.
6.	502, 503, 547.3, 548.1, 556.2, 557.2, 557.3, 557.4, 570, 572, 573, 669 and 669.1 (in respect of distance), 780.1 (in respect of distance), 818.1, 876, 2010, 2123, 2133, 2134, 2201, 2202, 2203, 2204, 2205, 2216, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2610.1, 2610.2, 2701, 2713.1, 2801, 2802, 2916, 5014, 7012, 7015, 7208, 7209, 7306, 7307	 Numerals indicating distance may be varied with— (a) distances of over 3 miles being expressed in miles to the nearest mile; (b) distances of ½ mile or more but less than 3 miles being expressed to the nearest ¼ mile with the fractions ¾, ½ and ¼ being used; and (c) distances of less than ½ mile being expressed in yards to the nearest 10 yards; "yards" or "YARDS" and the abbreviation "yds" may be used interchangeably.
7.	832.6, 832.7, 2011, 2012, 2013, 2017, 2020, 2021, 2101.1, 2115, 2116, 2117, 2310, 2313, 2903, 2904, 2905, 2908, 2909	Numerals indicating distance to a junction ahead may be varied by the substitution of the figure 1 or the fractions $\frac{1}{3}$ or $\frac{2}{3}$ as appropriate for the location of the sign.

(1) Itam	(2) Diagram numbers	(3) Permitted variant
<i>Item</i> 8.	2919	" ¹ / ₂ m" may be varied to "1 ¹ / ₂ m" or "1/3m".
9.	556.2, 573, 2020, 2021, 2103, 2106, 2107, 2112, 2116, 2117, 2125, 2126, 2202, 2203, 2204, 2206, 2207, 2302, 2304, 2306, 2309, 2316, 2317, 2318, 2319, 2320, 2321, 2501, 2508, 2601, 2602, 2604, 2610.1, 2713.1, 2905, 2908, 2909	
10.	669, 669.1, 2201, 2301, 2303, 2305, 2307, 2319, 2501, 2502, 2503	The indication of distance may be replaced by an arrow pointing horizontally to the left or to the right as appropriate.
11.	637, 637.1, 637.3, 638, 639.1A, 650.1, 650.2, 651, 660, 660.3, 660.4, 660.5, 661, 661.1, 662, 669, 669.1, 2201, 2205, 2301, 2303, 2305, 2319, 2503, 2713.1, 7271	An arrow may be added to the sign, pointing to the left or to the right as appropriate.
12.	780.1, 2003, 2005, 2006, 2019, 2028, 2029, 2103, 2106, 2107, 2111, 2114, 2127, 2131, 2133, 2135, 2202, 2206, 2210, 2213, 2215, 2216, 2308, 2311, 2312.1, 2314, 2315.1, 2505, 2506, 2509, 2601, 2603, 2610.2, 2702, 2703, 2705, 2708, 2709, 2801, 2803, 2805, 2902.1, 2926, 2929, 7018, 7303, 7304	varied.
13.	515, 515.1, 553, 557.3, 557.4, 573, 606, 638.1, 639, 640, 640.2A, 644, 788, 810, 962, 962.1, 962.2, 2316, 2610.1, 2711, 5013, 5014, 7104	The direction of the arrow or chevron may be varied with the arrow or chevron pointing horizontally to the left or to the right. The arrow may also point vertically upwards.
14.	557.4, 638.1, 639, 640, 640.2A, 780.1, 962, 962.1, 962.2, 2316	The arrow may be omitted from the sign.
15.	832.9, 2026, 2027, 2125, 2126 2132, 2134, 2136, 2137, 2203, 2204, 2207, 2208, 2211, 2212, 2214, 2302, 2304, 2306, 2309, 2312, 2315, 2317, 2318, 2320, 2321, 2322, 2323, 2504, 2507, 2508, 2602, 2604, 2605, 2606, 306	points may be reversed.

(1) Item	(2) Diagram numbers	(3) Permitted variant
1000	2607, 2608, 2609, 2610, 2701, 2704, 2707, 2710, 2713, 2802, 2804, 2806, 2807, 2902, 2921, 7305	
16.	817, 817.2, 868, 868.1, 872, 873, 874, 875, 877, 960, 960.1, 2001, 2002, 2003, 2004, 2005, 2007, 2008, 2009, 2010, 2017, 2018, 2019, 2021, 2022, 2023, 2024, 2025, 2029, 2033, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2127, 2216, 2505, 2509, 2705, 2706, 2803, 2805, 2904, 2904.1, 2909, 2913, 2914, 2925, 2926, 6006, 6006.1, 6008, 6009, 6009.1, 6009.2, 7201, 7202, 7203, 7203.1, 7204, 7205, 7206, 7207, 7210, 7211, 7212, 7213, 7214, 7215, 7216, 7217, 7218, 7220, 7221, 7230, 7231, 7232, 7233, 7234, 7235, 7236, 7237, 7238, 7239, 7240, 7250, 7251, 7252, 7253, 7254, 7255, 7306, 7402	Route symbols, or the number of arrows, or symbols indicating which lanes are open or closed to traffic, may be varied.
17.	504.1, 506.1, 507.1	The thickness of the route symbols may be varied to indicate which is the major road at the junction ahead.
18.	2001, 2002, 2004, 2007, 2008, 2009, 2010, 2022, 2023, 2024, 2025, 2033, 2101, 2102, 2104, 2105, 2108, 2109, 2110, 2112, 2113, 2113.1, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2913, 2914, 2925	The thickness of the route symbols may be varied to reflect the status of the routes indicated.
19.	674, 1035, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2030.1, 2033, 2034, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 307	The destination, other place name or junction name shown may be varied. The words "Other routes" or "Ring road" may be substituted for the destination. The phrases "via toll road", "Byway to" and "Single track road" may be used in addition to the destination.

(1)	(2)	(3)
Item	Diagram numbers	Permitted variant
	2112, 2113, 2113, 1, 2114, 2115, 2115, 1, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2131, 2132, 2133, 2134, 2138, 2201, 2202, 2203, 2206, 2207, 2209, 2210, 2211, 2213, 2214, 2215, 2216, 2308, 2309, 2401, 2402, 2403, 2509, 2601, 2602, 2605, 2607, 2608, 2610, 1, 2701, 2705, 2706, 2707, 2803, 2804, 2806, 2807, 2902, 2903, 2904, 2904, 1, 2905, 2906, 2908, 2909, 2911, 2913, 2914, 2915, 2917, 2919, 2920, 2924, 2925, 2926, 2927, 2928, 2929	
20.	2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2030.1, 2031, 2033, 2034, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2125, 2126, 2127, 2128, 2129, 2131, 2132, 2138, 2705, 2706, 2707, 2716, 2805, 2806, 2901, 2902, 2902.1, 2903, 2904, 2904.1, 2905, 2906, 2908, 2909, 2910, 2910.1, 2911, 2912, 2913, 2914, 2915, 2917, 2918, 2929, 7001.2, 7002, 7220, 7233, 7240, 7285, 7286	Identification numbers of routes may be added where not shown. The identification numbers of any route may be varied or omitted. A compass point ("North", "South", "East" or "West") may be added to the route number, shown in brackets in the same colour as the route number. Superseded route numbers may be retained provided they are cancelled with a diagonal red bar. Any motorway junction numbers may be varied or omitted. The junction number may be shown in either the bottom left hand or top left hand corner of a sign on a motorway.
		The emergency diversion route symbols shown in Part VII of Schedule 13 may be added.
21.	2001, 2002, 2003, 2004, 2005, 2007, 2008, 2009, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025*, 2026*, 2027*, 2028*, 2029, 2031*, 308	 (a) (a) Where a route leads directly onto a motorway, route number, destinations and motorway symbol shall be

Diagram numbers 2033, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2116, 2117, 2118, 2119, 2120, 2121*, 2122*, 2123*, 2124*, 2125*, 2126*, 2127*, 2128*, 2129*, 2131*, 2132*, 2138*, 2805*, 2806*, 2913*, 2914* *Permitted variant (a) does not apply to these signs.		d variant shown in white or a blue panel and the motorway junction number may be shown in white or a black patch or the blue panel ir the manner shown ir diagrams 2023 and 2104. Where the route leads indirectly to
	(c)	a motorway, the motorway route number with or without a compass point ("North", "South", "East" or "West") shall be shown in brackets in white on a blue patch. The blue patcl shall have a white border on signs with green or black backgrounds. The emergency diversion route symbols shown in Part VII of
2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123*, 2124*, 2125*, 2126*, 2127, 2128*, 2131*, 2132*, 2138*, 2805*, 2806*, 2913, 2914 *Permitted variant (a) does not apply to these signs.	(a) (b)	(a) Where route leads directly onto a primary route the destinations sha appear in white letter and the route number in yellow both o a green panel. Th green panel sha have a white borde on signs with blu backgrounds. Where a route leads indirectly to
	2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123*, 2124*, 2125*, 2126*, 2127, 2128*, 2131*, 2132*, 2138*, 2805*, 2806*, 2913, 2914 *Permitted variant (a) does not	2101, 2101.1, 2101.2, 2102, (a) 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123*, 2124*, 2125*, 2126*, 2127, 2128*, 2131*, 2132*, 2138*, 2805*, 2806*, 2913, 2914 *Permitted variant (a) does not product of these signs

with or without

(1) Item	(2) Diagram numbers	(3) Permitted variant
11000	Diugrum numbers	a compass point ("North", "South", "East" or "West") shall be shown in brackets in yellow on a green patch. The green patch shall have a white border on signs with black backgrounds.
		 (c) The emergency diversion route symbols shown in Part VII of Schedule 13 may be added.
23.	2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2029, 2033, 2913, 2914	Where a route leads directly onto a non-primary route, the destination, and route number if appropriate, shall appear in black letters on a white panel.
24.	2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2033, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2108, 2110, 2111, 2113, 2114, 2115, 2115.1, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2203, 2607, 2913, 2914	A symbol shown in Schedule 14, or the name of a tourist attraction, or such a symbol and such a name together may be shown in white on a brown panel. The direction in which the symbol faces and the relative positions of the symbol and name shall be reversed as necessary. The brown panel shall have a white border on signs with green or blue backgrounds.
25.	2001, 2002, 2003, 2004, 2005, 2006, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2022, 2023, 2024, 2026, 2027, 2028, 2029, 2033, 2101, 2101.1, 2101.2, 102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2118, 2119, 2122, 2123, 2124, 2127, 2913, 2914	The white lorry symbol shown in diagram 2805 may be incorporated on a black panel to indicate a route recommended for goods vehicles. The lorry symbol may be reversed. The black panel shall have a white border on signs with green or blue backgrounds.

(1)	(2) Diamana la m	(3) Demoisted a maint
<u>Item</u> 26.	Diagram numbers 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 019, 2022, 2023, 2024, 2026, 2027, 2028, 2029, 2033, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113.1, 2114, 2115, 2115.1, 2118, 2119, 2120, 2122, 2123, 2124, 2127, 2913, 2914	Permitted variant Directions to a Ministry of Defence establishment may be shown, with destinations appearing in black letters on a white panel with a red border as shown in diagram 2113. There shall be a white rim round the red border on signs with green or blue backgrounds.
27.	2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2017, 2018, 2019, 2022, 2023, 2024, 2033, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2118, 2119, 2120, 2122, 2123, 2124, 2127	A route recommended for pedal cyclists may be shown, with destinations appearing in white letters together with a white cycle symbol on a blue panel as shown in diagram 2105. The blue panel shall have a white border on signs with a green background.
28.	505.1, 506.1, 507.1, 512, 512.1, 512.2, 513, 517, 559, 609, 789, 789.1, 789.2, 823, 824, 825, 950, 962, 962.1, 962.2, 963, 963.1, 963.2, 1039, 1057, 2004, 2005, 2007, 2105, 2106, 2107, 2108, 2109, 2112, 2113, 2113.1, 2120, 2135, 2136, 2137, 2201, 2202, 2206, 2207, 2208, 2215, 2216, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2503, 2504, 2505, 2506, 2507, 2508, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2610.1, 2711, 2713.1, 2805, 2806, 2925, 2926, 2929, 6003, 7221	The symbol may be reversed. Where a bus symbol faces left a door shall be shown at the front of that side; when the symbol is reversed to face right a window shall be substituted for the door.
29.	2003, 2004, 2005, 2027, 2105, 2106, 2107, 2109, 2111, 2112, 2113, 2113.1, 2118, 2119, 2133, 2134, 2137, 2202, 2204, 2210, 2211, 2213, 2214, 2215, 2216, 2304, 2306, 2317, 2318, 2320, 2321, 2322, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2701, 2801, 2802, 2902, 2902.1, 2926	The relative positions of the symbol and other legend may be reversed.

(1) <i>Item</i>	(2) Diagram numbers	(3) Permitted variant
30.	2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2024, 2026, 2027, 2028, 2029, 2030, 2030.1, 2033, 2034, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2116, 2117, 2118, 2120, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2138, 2605, 2705, 2706, 2707, 2902, 2903, 2904, 2904.1, 2905, 2906, 2908, 2909, 2911, 2913, 2914, 2915	The aircraft symbol shown in diagram 2011 may be incorporated either with or without the name of an airport. The direction in which the symbol points may be varied. The symbol shall be coloured white when placed on a green or blue background and be coloured black when placed or a white or yellow background.
31.	2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2033, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2118, 2119, 2120, 2121, 2122, 2125, 2126, 2127, 2202, 2203, 2913, 2914, 2925, 2926	A sign shown in diagram 523.1, 524.1, 528, 529, 530, 554 ("Ford" or "Gate"), 612, 613, 616, 617 (with 618.1 "No vehicles"), 619, 619.1, 619.2, 622.1A (with symbol reversed where appropriate), 622.5 (with symbol reversed where appropriate), 626.2 (prohibitory roundel only), 629, 629.1 (with symbol reversed where appropriate), 629.2, 629.2A, 770, 771, 772, 779, the red bar shown in 816, 952 (with symbol reversed where appropriate), 953 (with 953.2) or 953.1 (with 953.2) may be incorporated as a symbol, and the plate shown in diagram 572 may also be incorporated as a panel beneath the symbol to indicate the distance to the hazard or prohibition indicated by the symbol.
		A white border shall be added round the red triangle or roundel and the black border omitted from the plate shown in diagram 572 when the symbol or plate are placed on a green, brown or blue

(1)	(2)	(3)
Item	Diagram numbers	Permitted variant background on that part of the sign. Such a sign may be omitted from a diagram where it is shown.
32.	2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2014, 2015, 2016, 2017, 2018, 2019, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2033, 2101, 2101.1, 2101.2, 2102, 2103,	The following legend may be incorporated to show the route avoiding a hazard or prohibition indicated by the appropriate symbol referred to in item 31—
	2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113, 1, 2114, 2115, 2115, 1	"avoiding steep hill";
	2113.1, 2114, 2115, 2115.1, 2118, 2119, 2120, 2121, 2122, 2125, 2126, 2127, 2131, 2132,	"avoiding swing bridge";
	2123, 2120, 2127, 2131, 2132, 2202, 2203, 2913, 2914, 2925, 2926	"avoiding lifting bridge";
	2720	"avoiding low bridge";
		"avoiding weak bridge";
		"avoiding ford";
		"avoiding gated road";
		"avoiding toll road";
		"avoiding town centre";
		"avoiding level crossing";
		"alternative route for goods vehicles";
		"alternative route for light vehicles only";
		"alternative route for heavy vehicles";
		"alternative route for high vehicles"; or
		"alternative route for long vehicles".
33.	2004, 2005, 2107, 2109, 2112, 2113.1, 2201, 2202, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2608, 2924, 2925, 2926, 2927 313	The symbol denoting the type of tourist attraction may be omitted or varied to any one of the symbols shown in Schedule 14 or other

(1) Item	(2) Diagram numbers	(3) Permitted variant
		approved symbol, except that the symbols shown in diagrams T4 (picnic area), T5 (youth hostel), T6 (caravan park) and T7 (camping site) shall not be used on a motorway. The symbol shall be reversedwhere appropriate.
34.	2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020,	The following symbols (shown in the manner specified) may be substituted for or added to the place name—
	2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2033, 2034, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2138, 2202, 2203, 2601, 2602, 2605, 2607, 2903*, 2904*, 2904.1*, 2905*, 2906*, 2908*, 2909*, 2913, 2914, 2915* *In respect of symbol No.1 only.	 The white on red double arrow symbol indicating British Railways shown in diagram 2134. A white border shall be added round the symbol when placed on a green, brown on blue background on that part of the sign. The red circle and crossbar indicating London Transport shown in diagram 2133. The symbol shall be shown on a white rectangular patch when placed on a green brown or blue background or that part of the sign.
		3. A symbol representing a Passenger Transport Executive Where necessary a white border or rectangular patch may be used to ensure adequate contras between the colour of the symbol and the background or that part of the sign.
		4. The parking symbol shown in diagram 2505. A white border shall be added round the blue symbol wher placed on a green or brown background on that part of the sign.
		5. The telephone symbol shown in diagram 2322. The symbol shall be coloured black when placed on a white or yellow background and be
	214	

(1) Item	(2) Diagram numbers	(3) Permitted variant
	2	coloured white when placed on a green, brown or blue background on that part of the sign.
		6. The disabled person symbol shown in diagram 2323. The symbol shall be coloured black when placed on a white or yellow background and be coloured white when placed on a green, brown or blue background on that part of the sign.
		7. The "WC" symbol denoting toilets shown in diagram 2323. The symbol shall be coloured black when placed on a white or yellow background and be coloured white when placed on a green, brown or blue background on that part of the sign.
		8. The "H" symbol and associated plate denoting hospital shown in diagram 827.1 or 827.2. The associated plate may be placed either below or to the right of the "H" symbol. A white border shall be added round the blue or red symbol when placed on a green background on that part of the sign.
		9. The ferry boat symbol shown in diagram 2007 or 2120 as appropriate. The symbol shall be coloured black with white vehicles when placed on a white or yellow background and be coloured white with black vehicles when placed on a green, brown, black or blue background on that part of the sign.
		10. The white on blue "Park and Ride" symbol shown in diagram 2503 with the words "Park and Ride". A white

(1) Itam	(2) Diagram numbers	(3) Powmitted waviant
Item	Diagram numbers	Permitted variant border shall be added round the blue symbol when placed on a green or brown background on that part of the sign.
35.	2001, 2002, 2003, 2007, 2008 2009, 2011, 2012, 2015, 2016 2017, 2019, 2020, 2022, 2024 2025, 2033, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2004, 2005, 2013,2021, 2023 or 2105, 2106, 2107, 2108, 2109, 2111, 2110 2112, 2113, 2113.1, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121	, be indicated in a panel at the
36.	2001, 2002, 2003, 2004, 2005 2008, 2009, 2017, 2019, 2022 2023, 2024, 2033, 2101, 2102 2103, 2104, 2105, 2106, 2107 2108, 2109, 2110, 2111, 2112 2113, 2113.1, 2114, 2115, 2118, 2119, 2120	near the boundary of a town,village or suburb, the namealone of that town, village or
37.	618, 618.1, 618.2, 618.3, 637.2, 637.3, 638.1, 639, 639.1A, 640, 640.2A, 640.3, 640.4, 642.2, 646, 650.1, 650.2, 660.5, 661.1, 662, 663, 663.1, 665, 667.1, 668.1, 961, 972, 974, 975, 2507, 7003, 7005, 7007	
38.	618.2, 618.3, 620, 620.1, 660, 660.3, 660.4, 661, 661.2, 661.3, 962, 962.1, 962.2, 250, 2506, 2507, 2508	
39.	7003, 7006, 7007	The words "Department of Transport" or "The Department of Transport" may be varied to "The Highways Agency", "The Welsh Office", "The Scottish Office" or the name of the appropriate traffic authority in England or Wales or roads authority in Scotland and the

(1)	(2)	(3)
Item	Diagram numbers	Permitted variant
		Department of Transport logo varied accordingly.
40.	781	The number of bells may be increased or decreased according to the width of the road over which the sign is placed. The colour of the bells may be varied.
41.	7201, 7210, 7211, 7212, 7213, 7214, 7215, 7216, 7217, 7218, 7220, 7221, 7230, 7231, 7232, 7233, 7234, 7235, 7236, 7237, 7238, 7239, 7240	shown in diagrams 7280 to
42.	515.1, 515.1A	The number of elements making up the sign face may be varied.

SCHEDULE 17

Regulations 18, 19

ILLUMINATION OF SIGNS

(1)	(2)	(3)
Item	Diagram numbers	Method of Illumination
1.	501, 504.1, 505.1, 506.1, 507.1, 510, 512, 512.1, 512.2, 513, 516, 517, 520, 521, 522, 523.1, 524.1, 528, 529, 529.1, 530, 531.1, 532.2 (in respect of the triangle symbols), 532.3 (in respect of the triangle symbols), 543 (other than when used with 547.6), 544 (other than when used with 547.5), 544.1, 544.2, 545, 555, 601.1, 602, 606 (other than when used as described in item 6 or item 7), 609, 610 (other than when used as described in item 7), 611 (other than when used as described in item 7), 611.1, 612 (other than when used as described in item 6), 613 (other than when used as described in item 6), 614 (other than when used as described in item 6), 615, 616 (other	 (1) Where the sign is erected on a road within 50 metres of any lamp lit by electricity which forms part of a system of street-lighting furnished by means of at least three such lamps placed not more than 183 metres apart, that sign shall be illuminated by a means of internal or external lighting either for so long as that system is illuminated, or throughout the hours of darkness, unless it is erected temporarily for any of the following reasons— (a) for the purpose of a temporary statutory provision; (b) by reason of some emergency; or (c) if that road is a road subject to a speed

(1) Itam	(2) Diagram numbers	(3) Mothod of Illumination
Item	Diagram numbers than when used as described in item 7), 617 (other than when used with 618), 618.2, 618.3, 618.3A, 618.4, 619, 619.1, 619.2, 622.1A, 622.2, 622.4, 626.2, 629, 629.1, 629.2, 629.2A, 632, 642 (if the diameter is more than 450mm). 652, 669, 669.1, 770, 771, 772, 779, 782, 784, 790, 818, 818.1, 818.1A, 868, 868.1, 872, 873, 874, 875, 950 (other than when used with 950.1), 952, 953, 953.1, 2901, 2902, 2902.1, 2903, 2904, 2904.1, 2905, 2906, 2908, 2909, 2910, 2910.1, 2911, 2912, 2915, 2917, 2918, 2919, 2920, 2921, 2929, 2930, 2931, 5010, 5011, 7001, 7002, 7004, 7005, 7006, 7009, 7010, 7011, 7012, 7013, 7201, 7202, 7203, 7203.1, 7204, 7205,7206, 7207, 7210, 7211, 7212, 7213, 7214, 7215, 7216, 7217, 7218, 7220, 7221, 7230, 7231, 7232, 7233, 7234, 7235, 7236, 7237, 7238, 7239, 7240, 7250, 7251, 7252, 7253, 7254, 7255, 7260, 7261, 7262, 7263, 7264, 7265, 7266, 7270, 7271, 7272, 7273, 7274	Method of Illumination limit of 30 mph or under, by reason of the execution of works, or of any obstruction on the road. (2) Where any such sign is erected in such a manner that it is not required to be illuminated throughout the hours of darkness by a means of internal or external lighting, it shall be illuminated by the use of retroreflecting material in accordance with the provisions of regulation 19.
2.	2711	The sign shall be internally illuminated.
3.	955 (other than when used as described in item 7), 956, 957	 (1) Where the sign is a terminal sign and is erected on a road within 50 metres of any lamp lit by electricity which forms part of a system of street-lighting furnished by means of at least three such lamps placed not more than 183 metres apart, that sign shall be illuminated by a system is illuminated, or throughout the hours of darkness. (2) Where the sign is erected in such a manner that it is not required to

(1) Item	(2) Diagram numbers	(3) Method of Illumination
1.0.11		be illuminated throughout the hours of darkness by a means of internal or external lighting, it shall be illuminated by the use of retroreflecting material in accordance with the provisions of regulation 19.
4.	 515, 515.1, 515.1A, 528.1, 548, 549, 550, 550.1, 551, 551.1, 551.2, 552, 553.1, 554, 554.1, 554.2, 556, 556.1, 557, 558, 558.1, 559, 562, 574, 581, 582, 583, 633, 642 (if the diameter is 450mm or less), 646, 647, 663, 663.1, 664, 665, 666, 774, 775, 777, 783, 785, 786, 787, 788, 789, 789.1 789.2, 801, 811, 816, 817, 820, 821, 822, 823, 824, 825, 827.1, 827.2, 829.1, 829.2, 829.3, 829.4, 830, 830.1, 830.2, 830.3, 831, 831.1, 832, 832.1, 832.2, 832.3, 832.4, 832.5, 832.6, 832.7, 832.8, 832.9, 832.10, 877, 950 (when used with 950.1), 951, 958, 958.1, 959, 959.1, 960, 960.1, 962, 962.1, 962.2, 964, 969, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2030.1, 2031, 2032, 2033, 2034, 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2312.1, 2313, 2314, 2315, 2315.1, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2702, 	

(1)	(2)	(3)
Item	Diagram numbers 2703, 2704, 2705, 2706, 2707, 2708, 2709, 2710, 2713.1, 2716, 2803, 2804, 2805, 2806, 2913, 2914, 2916, 2922, 2923, 2924, 2925, 2926, 2927, 2928, 2932, 5012, 5013, 5014, 5015, 7003, 7014, 7015, 7019, 7020, 7104, 7105, 7301, 7302, 7303, 7304, 7305, 7306, 7307	Method of Illumination
5.	543 (when used with 547.6), 544 (when used with 547.5), 557.1, 7023, 7024, 7401, 7402, 7403	The sign shall be illuminated by a means of internal or external lighting throughout the hours of darkness.
6.	606, 612, 613, 614	Where the sign is fixed to light signals prescribed by regulation 30, or by regulation 30 as varied by regulation 31, it shall be illuminated by a means of internal lighting at all times except when the light signals to which it is fixed are being maintained or repaired.
7.	606, 610, 611, 616, 955	Where the sign is mounted in a bollard fitted with a means of lighting it internally, the sign shall be illuminated throughout the hours of darkness by that means of internal lighting.
8.	502, 503, 511, 513.1, 513.2, 518, 519, 525, 526, 527, 530.1, 531.2, 543.1, 546, 547.1, 547.2, 547.3, 547.4, 547.5, 547.6, 547.7, 548.1, 553, 553.2, 554.3, 556.2, 557.2, 557.3, 557.4, 558.2, 563, 563.1, 570, 572, 573, 575, 583.1, 607, 608, 615.1, 618, 618.1, 620, 620.1, 627.1, 643, 644, 645, 773, 778, 778.1, 780, 780.1, 780.2, 804.1, 804.2, 804.3, 811.1, 817.2, 876, 950.1, 953.2, 954, 954.1, 954.2, 954.3, 954.4, 961, 7001.1, 7001.2, 7021, 7022, 7208, 7209, 7256, 7401.1	See regulation 20.
9.	530.2, 532.2 and 532.3 in respect of parts of the	The sign or plate may be left unlit, or be illuminated

(1)	(2)	(3)
Item	Diagram numbers	Method of Illumination
	signs other than the triangle symbols, 617 when used with 618, 622.5, 622.6, 625.1, 636, 636.1, 637, 637.1, 637.2,	either by means of internal or external lighting or by the use of retroreflecting material.
	637.3, 638, 638.1, 639, 639.1A, 640, 640.1, 640.2A, 640.3, 640.4, 640.5, 642.2, 642.3, 650.1, 650.2, 651, 660, 660.3, 660.4, 660.5, 661, 661.1, 661.2, 661.3, 661.4, 662, 667, 667.1, 667.2, 668, 668.1, 668.2, 810, 814.1, 814.2, 814.3, 814.4, 816.1, 826, 826.1, 833, 834, 835, 836, 857, 857.1, 864, 865, 963, 963.1, 963.2, 963.3, 965, 966, 967, 968, 968.1, 970, 971, 972, 973, 973.1, 974, 975, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2401, 2402, 2403, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2610.1, 2610.2, 2701, 2712, 2713, 2801, 2802, 2807, 7007, 7008, 7016, 7017, 7018, 7404	
10.	670, 671, 672, 673 (if the diameter is 600mm, 900mm or 1500mm)	(1) Where the sign is terminal sign and is erected o a trunk or principal road withi 50 metres of a street lamp lit b electricity, it shall throughou the hours of darkness—
		 (a) be continuously illuminated by means of internal or external lighting and may also be illuminated by the use of retroreflecting material; or (b) while the street lamp is lit, be continuousl illuminated by mean of external lighting and shall also be

(1) Item	(2) Diagram numbers	(3) Mathod of Illumination
110111	Diagram numbers	Method of Illumination use of retroreflecting material.
		(2) If any sign is required to be illuminated in the manner and at the times described in paragraph (1) above—
		 (a) every sign shown in the same diagram as the first-mentioned sign which is erected at or near the same point on the road or the same junction for the same purpose as the first- mentioned sign shall be continuously illuminated throughout the same period by the same means of lighting as the first-mentioned sign; and
		(b) if any of the signs is illuminated by the use of retroreflecting material, every other such sign shall be similarly illuminated
11.	670, 671, 672, 673, 674, 675	If the sign is not required by item 10 to be illuminated by lighting throughout the hours of darkness or throughout such hours while a street lamp is lit, it may be illuminated— (a) throughout the hours of darkness by means of internal or external lighting; or (b) throughout any period during the hours of darkness by the use of retroreflecting material; and if so illuminated paragraph (2) of item 10 shall apply as if the sign were a sign required by paragraph (1) of item 10 to be illuminated by lighting throughout the hours
	322	· -

(1) Item	(2) Diagram numbers	(3) Method of Illuminationof darkness or throughout such hours while a street lamp is lit.
12.	$\begin{array}{c} 1001, 1002.1, 1003, 1003.1,\\ 1003.2, 1003.3, 1003.4, 1004,\\ 1004.1, 1005, 1005.1, 1008,\\ 1008.1, 1009, 1010, 1012.1,\\ 1012.2, 1012.3, 1013.1,\\ 1013.3, 1014, 1017, 1018.1,\\ 1019, 1020.1, 1022, 1023,\\ 1024, 1024.1, 1025, 1025.1,\\ 1025.2, 1025.3, 1026, 1026.1,\\ 1027.1, 1028.2, 1028.3,\\ 1028.4, 1029, 1032, 1033,\\ 1035, 1036.1, 1036.2, 1037.1,\\ 1038, 1039, 1040, 1040.2,\\ 1040.3, 1040.4, 1040.5, 1041,\\ 1042, 1043, 1044, 1045, 1046,\\ 1048, 1048.1, 1049, 1049.1,\\ 1050, 1055, 1057, 1058, 1059,\\ 1060, 1060.1, 1061, 1061.1,\\ 1063\end{array}$	See regulation 28.
13.	560, 561	See regulation 21.
14.	776	The sign shall be illuminated by an intermittent red light flashing at a rate of not less than 54 nor more than 90 flashes per minute.
15.	515.2, 532.2, 605.2, 2714, 2715, 3014 (in respect of the backing board)	The parts of the sign coloured other than black or orange shall be illuminated by the use of retroreflecting material in accordance with the provisions of regulation 19. Any parts of the sign coloured orange may be so illuminated. The part of the sign in diagram 605.2 coloured yellow shall be fluorescent, except as provided in regulation 19(4).
16.	7101, 7102, 7103	See regulation 44.

SCHEDULE 18

Regulation 4

INTERPRETATION OF "UNLADEN VEHICLE"

1. In these Regulations "unladen vehicle" means, subject to paragraph 3 of this Schedule—

- (a) a motor vehicle not drawing a trailer or otherwise forming part of a combination of vehicles; or
- (b) a combination of vehicles comprising one motor vehicle drawing one or more trailers,

in relation to which the conditions specified in paragraph 2 below are satisfied.

- 2. The conditions mentioned in paragraph 1 above are—
 - (a) that the motor vehicle is a motor car, a heavy motor car, or a motor tractor;
 - (b) that no goods or burden are being carried in the motor vehicle or if the motor vehicle is drawing one or more trailers, in that combination of vehicles; and
 - (c) that not more than 2 persons (excluding the driver) are being carried in the motor vehicle or, if the motor vehicle is drawing one or more trailers, in that combination of vehicles.
- 3. For the purposes of this Schedule—
 - (a) in the case of a motor vehicle so constructed that it is fitted with a crane, dynamo, plant or other special appliance or apparatus which is a permanent or essentially permanent fixture, the appliance or apparatus is not to be deemed to constitute goods or burden of any description; and
 - (b) water, fuel or accumulators used for the purpose of the supply of power for the propulsion of a vehicle or, as the case may be, of any vehicle by which a trailer is drawn, and loose tools and loose equipment are not to be deemed to constitute goods or burden of any description.

PART II

THE TRAFFIC SIGNS GENERAL DIRECTIONS 1994

Citation and commencement

- 1. This Part of this Instrument—
 - (a) may be cited—
 - (i) as the Traffic Signs General Directions 1994, and
 - (ii) together with Part I above, as the Traffic Signs Regulations and General Directions 1994; and
 - (b) shall come into force on 12th August 1994.

Revocations

2. The Instruments specified in Appendix 2 to this Instrument, so far as they consist of or comprise directions, are hereby revoked except that for the purposes of the Traffic Signs (Welsh and English Language Provisions) Regulations and General Directions 1985(1) the revocations of the Directions marked with an asterisk in Appendix 2 shall have no effect.

Interpretation

3.—(1) In these Directions—

⁽**1**) S.I.1985/713.

"the 1971 Regulations" means the "Zebra" Pedestrian Crossings Regulations 1971(2); "controlled parking zone" has the meaning given in direction 23;

"former Directions" means the Directions revoked by these Directions;

"the Regulations" means the Traffic Signs Regulations 1994(3),

and the expressions listed in paragraph (2) have the same meaning as in the Regulations.

(2) Those expressions are—

"the 1981 Regulations";

"the 1984 Act";

"automatic level crossing";

"central reservation";

"cycle lane";

"dual carriageway road";

"hours of darkness";

"level crossing";

"manually operated";

"maximum gross weight";

"motorway";

```
"national speed limit";
```

"non-primary route";

"pedal cycle";

"pedestrian zone";

"plate";

"primary route";

"principal road"; "road marking";

"route";

"sign";

"speed limit";

"stud";

"temporary statutory provision";

"traffic lane"; and

"variable message sign".

References in the Directions

4. In these Directions, unless it is expressly provided otherwise or the context otherwise requires,

(a) a reference to a numbered direction is a reference to the direction so numbered in these Directions;

(**2**) S.I. 1971/1524.

⁽³⁾ Part I of this Instrument.

- (b) a reference to a numbered paragraph is a reference to the paragraph so numbered in the direction in which the reference occurs;
- (c) a reference to a sub-paragraph followed by a number or letter is a reference to the subparagraph bearing that number or letter in the direction in which the reference occurs;
- (d) a reference to a numbered diagram is a reference to the diagram so numbered in a Schedule to the Regulations;
- (e) a reference to a sign shown in a diagram in a Schedule to the Regulations includes a reference to that sign as varied in accordance with the Regulations;
- (f) a reference to a numbered regulation or Schedule is a reference to the regulation of, or to the Schedule to, the Regulations so numbered; and
- (g) in any direction which includes a table, references to a table are to the table in that direction.

Saving

5. Any sign, which immediately before the coming into force of these Directions was placed on or near any road in conformity with the former Directions, so long as it continues to conform with those Directions as though they had not been revoked, shall be treated as if placed in conformity with these Directions, notwithstanding any provision of these Directions to the contrary.

Signs to be placed only at sites approved by the Secretary of State

6. A sign shown in diagram 601.1, or in diagram 1040 or 1040.2 (when either is varied to include a continuous white line bounding the hatched marking), shall not be placed for the first time at any site except with the approval of the Secretary of State.

Signs to be placed only to indicate the effect of a statutory prohibition

7.—(1) Except as provided by paragraph (3), the signs to which this paragraph applies may be placed on or near a road only to indicate the effect of an Act, order, regulation, byelaw or notice ("the effect of a statutory provision") which prohibits or restricts the use of the road by traffic.

- (2) Paragraph (1) applies to—
 - (a) the signs shown in diagrams 606, 607, 609, 612, 613, 614, 616, 617, 618, 618.1, 618.2, 618.3, 618.3A, 618.4, 619, 619.1, 619.2, 620, 620.1, 622.1A, 622.2, 622.4, 622.5, 622.6, 625.1, 626.2, 627.1, 629, 629.1, 629.2, 629.2A, 632, 636, 636.1, 637, 637.1, 637.2, 637.3, 638, 638.1, 639, 639.1A, 640, 640.2A, 640.3, 640.4, 640.5, 642, 642.2, 642.3, 643, 644, 646, 647, 650.1, 650.2, 651, 652, 660, 660.3, 660.4, 660.5, 661, 661.1, 661.2, 661.3, 661.4, 662, 663, 663.1, 664, 665, 666, 667, 667.1, 667.2, 668, 668.1, 668.2, 669, 669.1, 670, 671, 672, 673, 674, 675, 804.1, 804.2, 804.3, 810, 951, 952, 953, 953.1, 953.2, 954, 954.1, 954.2, 954.3, 954.4, 955, 956, 957, 958, 958.1, 959, 959.1, 960, 960.1, 961, 962, 962.1, 962.2, 963, 963.1, 963.2, 963.3, 964, 969, 974, 975, 1017, 1018.1, 1019, 1020.1, 1025.1, 1025.3, 1028.2, 1028.3, 1028.4, 1032, 1033, 1036.1, 1036.2, 1037.1, 1046, 1048, 1048.1, 1049, 1049.1, 1050, 2003, 2007, 2009, 2010, 2107, 2108, 2123, 2124, 5001.1, 5001.2, 5003, 5003.1, 5005, 5005.1, 7201, 7203.1, 7204, 7207, 7210, 7211, 7212, 7213, 7214, 7215, 7216, 7217, 7218, 7220, 7230, 7231, 7232, 7233, 7234, 7260, 7261, 7262, 7263, 7282, 7283 and 7284; and
 - (b) any sign which, by virtue of regulation 17 and item 31 of Schedule 16, incorporates as a symbol a sign shown in a diagram specified in sub-paragraph (a).

(3) The sign shown in a diagram whose number is specified in an item in column (2) of the Table may be placed at the place or in the circumstances specified in column (3) of that item notwithstanding that it does not in those circumstances indicate the effect of a statutory provision.

(1)	(2)	(3)
Item	Diagram	Circumstances
1.	606	On the central island of a roundabout or in combination with a plate of the type shown in diagram 608.
2.	609	On a road approaching its junction with a dual carriageway road or in combination with a plate of the type shown in diagram 608.
3.	616, 1046	At a site which has been approved by the Secretary of State.
4.	629.2, 629.2A	On— (a) a road which passes under or through a bridge, tunnel or other structure which limits the height of vehicles using that road; or (b) any such bridge, tunnel or other structure.
5.	2003, 2007, 2009, 2107, 2108	 When including a symbol represented in— (a) any diagram in Schedule 1; or (b) diagram 629.2 or 629.2A in the circumstances specified in item 4 above.
6.	669, 669.1	When placed to indicate that the prohibition indicated by the sign shown in diagram 629.2 or 629.2A is ahead, provided that that sign has been placed in the circumstances specified in item 4 above.

Table

(4) The sign shown in diagram 626.2 may be placed only to indicate the effect of a statutory provision which restricts the use of a road carried by a bridge or other structure—

- (a) in the case of vehicles required to be marked with their maximum gross weight, to any vehicle with a maximum gross weight not exceeding that indicated on the sign; or
- (b) in the case of vehicles not required to be marked with their maximum gross weight but required to be marked with their unladen weight, to any vehicle with an unladen weight not exceeding the maximum gross weight indicated on the sign.

The placing of certain signs to indicate the beginning of a restriction, requirement, prohibition or speed limit

8.—(1) This direction applies to a sign which is shown in diagram 616, 617, 618, 618.1, 618.2, 618.3, 618.3A, 619, 619.1, 619.2, 620, 620.1, 622.1A, 622.4, 622.5, 622.6, 625.1, 626.2, 627.1, 629, 629.1, 629.2, 629.2A, 632, 642, 646, 663, 663.1, 665, 667, 667.1, 668, 668.1, 670, 672, 674, 951, 952, 953, 953.1, 955, 956 or 957 and which is placed to indicate the point at which a restriction, requirement, prohibition or speed limit applying to traffic on a road (in this direction called "the relevant road") begins.

(2) Subject to paragraphs (3) and (4), a sign to which this direction applies shall be placed on the relevant road at or as near as practicable to the point referred to in paragraph (1)—

- (a) where the road has only one carriageway, on each side of the carriageway of the road; or
- (b) where the road has more than one carriageway, on each side of each carriageway in relation to which the restriction, requirement, prohibition or speed limit begins.

(3) Where the relevant road has one carriageway, signs to which this direction applies need only be placed on one side of the relevant road to indicate the point at which a restriction, requirement, prohibition (but not a speed limit) begins—

- (a) where the restriction, requirement or prohibition applies only to traffic on one side of the relevant road; or
- (b) at a junction where—
 - (i) traffic proceeding on another road on which it is permitted to proceed only in one direction turns into the relevant road; or
 - (ii) the relevant road is less than 5 metres wide.

(4) Where a length of road which passes under or through a bridge, tunnel or other structure is subject to a prohibition on vehicles exceeding a particular height, the sign shown in diagram 629.2 or 629.2A may be placed on the bridge, tunnel or other structure to indicate the prohibition in addition to or instead of the signs placed as required by paragraph (2).

The placing of certain signs to indicate the end of a restriction, requirement, prohibition or speed limit

9.—(1) When a sign shown in diagram 618.4, 622.2, 645, 647, 664, 666, 667.2, 668.2, 673, 675 or 964 is placed to indicate the point at which traffic on a road ceases to be subject to a restriction, requirement, prohibition or speed limit, the sign shall be placed on the road as near as practicable to that point.

(2) Where a length of road ceases to be subject to a speed limit and becomes subject to a national speed limit, the sign shown in diagram 671 shall be placed at or as near as practicable to the point where the speed limit ends and a national speed limit begins, except in a case where a restriction of speed has been imposed under section 14 of the 1984 Act by reason of works which are being or are proposed to be executed on or near the road in which case

- (a) the sign shown—
 - (i) in diagram 7006; or

(ii) in diagram 7001 when placed in combination with the plate shown in diagram 645;

- shall be placed as indicated above in this paragraph; and
- (b) the sign shown in diagram 671 may also be so placed.

(3) When a sign shown in diagram 671, 673 or 675 is placed to indicate the point at which traffic on a road ceases to be subject to a speed limit—

- (a) where the road has only one carriageway, one such sign shall be placed on each side of the carriageway of the road; or
- (b) where the road has more than one carriageway, one such sign shall be placed on each side of each carriageway on which the speed limit ends.

Repeater signs

10.—(1) Paragraph (2) applies to the signs shown in diagrams 614, 632, 636, 636.1, 637, 637.1, 637.2, 637.3, 638, 638.1 when the arrow is omitted, 639 when the arrow is omitted, 640 when the arrow is omitted, 642, 646, 670, 672, 956, 957, 959, 959.1, 960, 960.1 and 961.

(2) Signs to which this paragraph applies shall be placed at regular intervals along a road which is subject to a restriction, requirement, prohibition or speed limit which can be indicated by the signs, except that the sign shown in diagram 670 shall not be placed along a road which is—

- (a) in England and Wales a restricted road as defined by section 82 of the 1984 Act and in Scotland a road as respects which there is in force an order prohibiting the driving of motor vehicles at a speed exceeding 30 miles per hour and on which there is provided a system of carriageway lighting furnished by means of lamps placed not more than 185 metres apart; or
- (b) a motorway on which a national speed limit is in force.

(3) The sign shown in diagram 671 shall be placed at regular intervals along the length of a road (other than a motorway) on which—

- (a) there is a system of street or carriageway lighting furnished by lamps lit by electricity placed not more than 183 metres apart in England and Wales or not more than 185 metres apart in Scotland; and
- (b) a national speed limit is in force.

Signs to be placed only on specified types of road

11.—(1) The signs shown in diagrams 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2030, 2030.1, 2032, 2033, 2034, 2313, 2314, 2315 and 2315.1 may be placed only on or near a primary route.

(2) The signs shown in diagrams 2026, 2027, 2028 and 2029 may be placed only on a primary route, or on a non-primary route at a junction with a primary route.

12.—(1) The signs shown in diagrams 2101, 2101.1, 2101.2, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2113.1, 2114, 2115, 2115.1, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2128, 2130, 2131, 2133, 2135, 2138, 2310, 2311, 2312 and 2312.1 may be placed only on or near a non-primary route.

(2) The signs shown in diagrams 2125, 2126, 2127, 2132, 2134, 2136, 2137, 2322, 2323 and 2807 may be placed only on or near a non-primary route, or on a primary route at a junction with a non-primary route.

(3) The signs shown in diagrams 1012.3, 2031, 2129, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2316, 2317, 2318, 2319, 2320, 2321, 2401, 2402, 2403, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2610.1, 2610.2, 2701, 2702, 2703, 2704, 2705, 2706, 2707, 2708, 2709, 2710, 2712, 2713.1, 2801, 2802, 2803, 2804, 2805, 2806 and 7240 may not be placed on a motorway.

13.—(1) The signs shown in diagrams 832.3, 1012.2, 1042, 2901, 2903, 2904, 2904.1, 2905, 2906, 2908, 2909, 2910, 2910.1, 2911, 2912, 2913, 2914, 2915, 2916, 2917, 2918, 2919, 2920, 2922, 2923, 2924, 2925, 2926, 2927, 2928, 2929, 2930, 2931, 2932, 7002, 7212, 7220, 7230 and 7233 may be placed only on or near a motorway.

(2) The signs shown in diagrams 2902 and 2902.1 may be placed only on a motorway or on another road at a junction with a motorway.

14.—(1) The signs shown in diagrams 823, 824, 825, 868, 868.1, 872, 873, 874, 875 and 876 may be placed only on or near—

- (a) a motorway when the colour of the background of the sign is blue;
- (b) a primary route when the colour of the background of the sign is green; or
- (c) a non-primary route when the colour of the background of the sign is white.

(2) The sign shown in diagram 877 may be placed only on or near—

- (a) a primary route when the colour of the background of the sign is green; or
- (b) a non-primary route when the colour of the background of the sign is white.

Signs to be placed only in conjunction with specified road markings (except signs for prohibitions and restrictions on waiting etc)

15.—(1) Save as provided in paragraph (2), a sign shown in a diagram whose number appears and is placed in the circumstances (if any) or is in the form (if any) specified in an item in column (2) in the Table may be placed on a road only in conjunction with a road marking shown in a diagram whose number appears and is in the form (if any) specified in column (3) of that item.

(1) Item	(2) Sign diagram number	(3) Road marking diagram number
1.	557.1	1060, 1060.1, 1061 or 1061.1
2.	601.1	1002.1 and 1022
3.	602	1003 and 1023
4.	611.1 if placed in conjunction with diagram 602	1003, 1003.4 and 1023
5.	611.1	1003.3 and 1003.4
6.	957	1057
7.	959	1048 and 1049
8.	959.1	1049 varied to a width of 150 millimetres and 1057
9.	960	1048 and 1049
10.	960 varied to include pedal cycle symbol	1048.1 and 1049
11.	960.1	1049 varied to a width of 150 millimetres and 1057

(2) The provisions of paragraph (1) requiring the placing of a sign shown in diagram 601.1, 602 or 611.1 in conjunction with a road marking shall not apply during the execution of works on a road near the sign—

- (a) if those works necessitate the temporary removal of the marking; or
- (b) if the sign is erected only temporarily in connection with the execution of works on a road.

Road markings to be placed only in conjunction with other road markings or specified signs (except road markings for prohibitions and restrictions on waiting etc)

16.—(1) A road marking shown in a diagram whose number appears and is placed in the circumstances (if any) specified in an item in column (2) of the Table may be placed on the carriageway of a road only in conjunction with a road marking or sign shown in a diagram whose number appears and is in the form (if any) specified in column (3) of that item.

(1)	(2)	(3)
Item	Road marking diagram number	Road marking or sign number
1.	1001 unless placed at a site where traffic is from time to time controlled by a constable	3000, 3000.1, 3000.2, 3000.3, 3000.4, 3000.5, 3000.6 or 3014
2.	1002.1 and 1022	601.1
3.	1003.3	611.1 and 1003.4
4.	1003.4	611.1
5.	1022	601.1 and 1002.1
6.	1023	1003
7.	1024.1	1010 and 1014
8.	1048	1049 and either 959 or 960
9.	1048.1	1049 and 960 varied to include the pedal cycle symbol
10.	1049	957 and 1057, or 1048 and either 959 or 960, or 1048.1 and 960 varied to include the pedal cycle symbol, or 1057 and either 959.1 or 960.1
11.	1049.1	957 and 1057
12.	1050	964 and 1049
13.	1057	955, 956, 957, 959.1, 960.1 or 967
14.	1058	1057
15.	1059	1057
16.	1060, 1060.1, 1061, 1061.1 unless 557.1 placed in a zone	

(1) Item	(2) Road marking diagram number	(3) Road marking or sign number
	indicated by the sign shown in diagram 674	

(2) A road marking shown in diagram 1003, 1023 or 1049 when varied in size to conform with any of the smaller dimensions prescribed for it may be placed on the carriageway only in conjunction with the marking shown in diagram 1057 and with one or more of the signs shown in diagrams 955, 957, 959.1, 960.1 and 967.

(3) The road marking shown in diagram 1009 when varied in size to conform with the smallest dimensions prescribed for it may be placed on the carriageway only to mark the junction of a cycle track and another road and in conjunction with the road markings shown in diagrams 1003 and 1023 and having the smaller dimensions prescribed for them.

The placing of the signs shown in diagrams 615 and 811

17. The signs shown in diagrams 615 and 811 may be placed on a road only in conjunction with one another.

Signs to be placed only in combination with specified plates or other signs

18.—(1) A sign shown in a diagram whose number appears and is placed in the circumstances (if any) specified in an item in column (2) of the Table may be placed on a road only in combination with a plate shown in the diagram whose number appears in column (3) of that item.

(1)	(2)	(3)
Item	Sign diagram number	Plate diagram number
1.	501 when placed in advance of the sign shown in diagram 601.1	502
2.	501 when placed in advance of the sign shown in diagram 602	503
3.	544.2	547.4
4.	553.1	553.2
5.	554.2	554.3
6.	556.1	556.2
7.	557.1	557.2, 557.3 or 557.4
8.	562	563, 563.1 or 7022
9.	583	583.1
10.	615	615.1
11.	617	618 or 618.1
12.	779	780, 780.1 or 780.2
13.	811	811.1

(1)	(2)	(3)
Item	Sign diagram number	Plate diagram number
14.	953	953.2
15.	953.1	953.2

(2) The sign shown in diagram 545 may be placed on a road only in combination with a plate shown in diagram 546, 547.1, 547.2, 547.3 or 547.7 or the sign shown in diagram 4004.

(3) A sign shown in diagram 515.1A or 515.2 may be placed on a road only in combination with the sign shown in diagram 606.

Plates to be placed only in combination with specified signs

19. A plate shown in a diagram whose number appears and is in the form (if any) specified in an item in column (2) of the Table may be placed on a road only in combination with a sign shown in a diagram whose number appears and is placed in the circumstances (if any) specified in column (3) of that item.

(1)		(2)
(1) Item	(2) Plate diagram number	(3) Sign diagram number
<u>1.</u>	502	501
2.	503	501
3.	511	504.1, 505.1, 506.1, 507.1, 510, 512, 512.1, 512.2, 513, 516, 517, 520, 523.1, 524.1, 528 or 556
4.	511 when varied to "HEAVY PLANT CROSSING"	504.1, 505.1, 506.1, 507.1, 512.1 or 512.2
5.	513.1	512, 512.1, 512.2 or 513
6.	513.2	512, 512.1, 512.2, 513 or 7009
7.	518	516, 517 or 520
8.	519	516 or 517
9.	525	523.1 or 524.1
10.	526	512, 512.1, 512.2, 513, 523.1, 524.1 or 554.1
11.	527	523.1 or 524.1
12.	530.1	530
13.	530.2	530, 629.2 or 629.2A
14.	531.2	531.1
15.	543.1	543, 3000, 3000.3, 3000.4, 3000.5 or 3000.6
16.	546	545

(1) Item	(2) Plate diagram number	(3) Sign diagram number
17.	547.1	545
18.	547.2	545
19.	547.3	544.1 or 545
20.	547.4	544.2
21.	547.5	544
22.	547.6	543
23.	547.7	545
24.	548.1	548 when placed in advance of the sign shown in diagram 4005
25.	553	552
26.	553.2	553.1
27.	554.3	554.2, 622.1A, 622.4, 629, 629.1 or 632
28.	556.2	556.1
29.	557.2	557.1
30.	557.3	557.1
31.	557.4	557.1
32.	558.2	558
33.	563	562
34.	563.1	562
35.	570	513, 516 when placed in combination with 518 or 519, 517 when placed in combination with 518 or 519, 521, 523.1, 524.1, 548, 549, 550, 550.1, 51, 551.1, 551.2, 553.1, 554.2, 556, 556.1, 557, 558, 558.1, 559, 581, 582, 614, 615, 632, 642, 811, 7001 or 7009
36.	572	504.1, 505.1, 506.1, 507.1, 516, 517, 520, 521, 522, 523.1, 524.1, 528, 529, 529.1, 530, 531.1, 543, 544, 544.1, 544.2, 545, 552, 554, 555, 562, 770, 771, 772, 782, 950, 7001 or 7009
37.	573	516, 517, 523.1, 524.1, 528, 529, 529.1, 530, 531.1, 543,

(1) Itom	(2) Plate diagram number	(3) Sign diagnam number
Item	Plate diagram number	Sign diagram number 544, 544.1, 544.2, 545, 552, 554, 555, 562, 770, 771, 772, 782, 950, 7001 or 7009
38.	575	516, 517, 528 or 529.1
39.	583.1	583
40.	607	606 or 609
41.	608	501, 601.1, 602, 606, 609 or 610
42.	615.1	615
43.	618	617
44.	618.1	617
45.	620	619, 619.1, 619.2, 622.1A, 622.5, 622.6, 629, 629.1 or 952
46.	620.1	619 or 619.1
47.	627.1	626.2
48.	643	636 or 642
49.	644	636 or 642
50.	645	614, 615, 632, 642, 811 or 7001
51.	773	529, 529.1, 558, 770, 771 or 772
52.	778	602
53.	778.1	602
54.	780	779
55.	780.1	779
56.	780.2	779
57.	804.1	801
58.	804.2	801
59.	804.3	801
60.	811.1	811
61.	817.2	523.1 and either 523 or 526, or 554.1 and 526
62.	876	868, 868.1, 872, 873, 874 or 875
63.	950.1	950
64.	953.2	953 or 953.1

(1)	(2)	(3)
Item	Plate diagram number	Sign diagram number
65.	954	606, 609, 612, 613, 616, 629 or 629.1
66.	954.1	606, 609, 612, 613, 616, 629 or 629.1
67.	954.2	606, 609, 612, 613, 616, 629, 629.1 or 952
68.	954.3	606, 609, 612 or 613
69.	954.4	606, 609, 612, 613 or 816
70.	961	958, 958.1, 959 or 959.1
71.	7001.1	7001
72.	7001.2	7001
73.	7021	7001
74.	7022	562
75.	7208	7202, 7206 or 7207
76.	7209	7203, 7203.1, 7204 or 7205
77.	7256	7250, 7251, 7252, 7253, 7254 or 7255
78.	7401.1	7401

(2) A plate shown in diagram 954.3 or 954.4 shall not be placed in combination with the sign shown in diagram 616.

Placing of road markings and signs to indicate prohibitions and restrictions on waiting, loading and unloading and parking

20.—(1) Subject to paragraphs (2) and (3)—

- (a) the road marking shown in diagram 1018.1 may be placed on a side of a road only for the purpose of indicating a statutory prohibition or restriction on the waiting of vehicles which applies on that side of the road at all times of day on every day of the year or on every day in a period of at least four consecutive months;
- (b) the road marking shown in diagram 1017 may be placed on a side of a road only for the purpose of indicating a statutory prohibition or restriction on the waiting of vehicles which is not a restriction of the kind mentioned in sub-paragraph (a).

(2) In this direction, references to a statutory prohibition or restriction on the waiting of a vehicle do not include references to any such prohibition or restriction imposed—

- (a) on waiting for the purpose of loading or unloading goods from a vehicle or picking up or setting down passengers from a vehicle;
- (b) expressly to limit the duration of waiting of vehicles within a particular period; or
- (c) on the waiting of goods vehicles (as defined by section 192(1) of the Road Traffic Act 1988(4)) but of no other class of vehicle.

^{(4) 1988} c. 52.

(3) A road marking shown in diagram 1017 or 1018.1 shall not be placed on a road on which a marking shown in diagram 1025.1 or 1025.3 is placed, or on which the marking shown in diagram 1027.1 is placed in conjunction with the sign shown in diagram 642.2 unless the restrictions indicated by the marking shown in diagram 1017 or 1018.1 apply on that road at times other than those indicated on the sign shown in diagram 642.2.

21.—(1) The road marking shown in diagram 1020.1 may be placed on a side of the carriageway of a road only for the purpose of indicating a statutory prohibition or restriction on the waiting of vehicles for the purpose of their being loaded or unloaded which applies on that side of the road at all times of the day on every day of the year or on every day in a period of at least four consecutive months.

(2) The road marking shown in diagram 1019 may be placed on a side of the carriageway of a road only for the purpose of indicating a statutory prohibition or restriction on the waiting of vehicles for the purpose of their being loaded or unloaded (but not for indicating a statutory prohibition or restriction which expressly limits the duration of waiting by vehicles within a particular period for that purpose) which is not a restriction of the kind mentioned in paragraph (1).

22.—(1) Except where it is placed to indicate the effect of a temporary statutory provision, a sign shown in a diagram whose number appears in column (2) of an item in the Table shall not be placed except—

- (a) on or near the side of a road, and
- (b) in conjunction with, and on the same side of the road as, a road marking which is shown in a diagram and is in the form (if any) indicated in column (3) of that item.

(1)	(2)	(3)
Item	Sign diagram number	Road marking diagram
1.	637	1018.1
2.	637.3	1018.1
3.	638	1020.1
4.	638.1	1019
5.	639	1017
6.	639.1A	1017 and 1028.4 (when no legend appears) or 1033
7.	640	1017 and 1019
8.	642.2	1027.1
9.	642.3	1018.1 and 1020.1
10.	650.1	1028.2 when indicating "TAXIS"
11.	650.2	1028.2 when indicating "TAXIS"
12.	660	1028.3 when varied to indicate "LARGE OR SLOW VEHICLES ONLY", 1028.4 when indicating "DOCTOR"

(1)	(2)	(3)
Item	Sign diagram number	Road marking diagram
		or when no legend appears, or 1033
13.	660.3	1028.4 when indicating "DOCTOR" or when no legend appears, or 1033
14.	660.4	1028.3 when varied to indicate "LOADING ONLY", or 1033
15.	660.5	1028.4 when no legend appears, 1032 or 1033
16.	661	1028.3 or 1033 when either road marking is indicating "DISABLED" or when no legend appears
17.	661.1	1028.4 when no legend appears, 1032 or 1033
18.	661.2	1028.4 when no legend appears, 1032 or 1033
19.	662	1028.4 when no legend appears, 1032 or 1033
20.	974	1025.1 or 1025.3
21.	975	1025.1 or 1025.3 when either marking is varied to "BUS STAND"

(2) Subject to paragraph (3) the sign shown in diagram 637.2 may be placed only on a road within a pedestrian zone where a sign shown in diagram 618.2, 618.3 or 618.3 A is placed at each entrance into the zone for vehicular traffic.

(3) The sign shown in diagram 637.2 shall not be used on a road within the pedestrian zone to which the sign relates except in conjunction with—

- (a) the road marking shown in diagram 1017 or 1018.1 unless—
 - (i) the road does not comprise a carriageway and footway which are separately defined;
 - (ii) the entry of vehicular traffic into the pedestrian zone is restricted at the same times as those at which the waiting of vehicles is prohibited as indicated on the upper panel of the sign in diagram 637.2; and
 - (iii) the prohibition on the waiting of vehicles applies uniformly throughout every road in the zone, and
- (b) where there is a prohibition on the loading and unloading of vehicles, the road marking shown in diagram 1019 or 1020.1 unless—
 - (i) the road does not comprise a carriageway and footway which are separately defined;
 - (ii) the entry of vehicular traffic into the pedestrian zone is restricted at the same times as those at which the loading and unloading of vehicles is prohibited as indicated on the lower panel of the sign in diagram 637.2; and

(iii) the prohibition on the loading and unloading of vehicles applies uniformly throughout every road in the zone.

23.—(1) Subject to paragraph (2) a road marking shown in a diagram whose number appears and is in the form (if any) specified in an item in column (2) of the Table may be placed on the carriageway only in conjunction with, and on the same side of the road as, a sign shown in a diagram whose number appears and is in the form specified (if any) in column (3) of that item.

(1) Item	(2) Road marking diagram number	(3) Sign diagram number
1.	1017	637.2, 639, 639.1A or 640
2.	1018.1	637, 637.2, 637.3 or 642.3
3.	1019	637.2, 638.1 or 640
4.	1020.1	637.2, 638 or 642.3
5.	1025.1	974 or 975
6.	1025.3	974 or 975
7.	1028.2 when indicating "TAXIS"	650.1 or 650.2
8.	1028.2 when varied to "BUSES" or "COACHES"	969
9.	1028.3 when indicating "DISABLED" or when no legend appears	661
10.	1028.3 when varied to "LARGE OR varied to" Large or slow "SLOW VEHICLES ONLY vehicles only"	660
11.	1028.3 when varied to "LOADING ONLY"	660.4
12.	1028.4 when indicating "DOCTOR" varied to "Doctor permit holders only"	660
13.	1028.4 when no legend appears	639.1A, 660, 660.3, 660.5, 661.1, 661.2, 661.3, 662 or 801
14.	1033 when indicating "DISABLED"	661

Table

(2) Paragraph (1) shall not apply to a road marking placed on a road within a controlled parking zone, except where the road marking is placed to indicate restrictions different from the restrictions indicated on a sign shown in diagram 663 or 663.1 placed at the entrances for vehicular traffic into the zone.

(3) In this direction and direction 24, "controlled parking zone" means either-

- (a) an area—
 - (i) in which, except where parking places have been provided, every road has been marked with one or more of the road markings shown in diagrams 1017, 1018.1, 1019 and 1020.1; and
 - (ii) into which each entrance for vehicular traffic has been indicated by a sign shown in diagram 663 or 663.1; or
- (b) an area—
 - (i) in which at least one of the signs shown in diagram 640.2A has been placed on each side of every road; and
 - (ii) into which each entrance for vehicular traffic has been indicated by a sign shown in diagram 665.

24. A sign shown in diagram 663, 663.1, 664, 665 or 666 may be placed only at the boundary of a controlled parking zone.

Signs to be placed only at specified sites or for specified purposes

25. The sign shown in diagram 545, when placed in combination with the plate shown in diagram 547.1, or with a plate shown in either diagram 546 or 547.1 together with the sign shown in diagram 4004, may be placed only near a school crossing place as defined by regulation 39(2).

26. The sign shown in diagram 551.1 may be placed on or near a road only—

- (a) at a site which is approved as a migratory toad crossing by or on behalf of the Secretary of State; and
- (b) during February, March, April and May in each year.

27. The sign shown in diagram 574 may be placed only in or near an infected place or area for the purposes of the Animal Health Act 1981(5) and shall be removed as soon as it ceases to be in or near such a place or area.

28. A sign shown in diagram 830, 830.1, 831 or 832, except when varied to contain the words "WEIGHT CHECK", and the sign shown in diagram 830.3 except when placed in connection with a weight check, may be placed only in connection with a traffic census the taking of which on a road has been approved—

- (a) by the traffic authority for that road;
- (b) by the chief officer of police of the police area in which the road is situated; and
- (c) by or on behalf of the Secretary of State.

29. A sign shown in diagram 833, 834, 835 or 836 may be placed only to regulate the movement of vehicular traffic into and out of premises with more than one access to a road.

30. The sign shown in diagram 957 may be placed on a road only when the road has been divided into a part reserved for the use of pedal cycles only and a part reserved for use by pedestrians only by either or both of the following means—

- (a) the road marking shown in diagram 1049 (when that marking is varied to be 150 millimetres wide) or 1049.1;
- (b) the presence on the road of works such as distinctive colouring of the surface of each part, a kerb or other device.

^{(5) 1981} c. 22

Restrictions on the placing of temporary signs

31. The signs shown in any diagram in Schedule 12 other than diagrams 7014 and 7103 may be placed only in connection with the execution of works on or near a road or a temporary obstruction thereon, and any such sign so placed and any other sign shown in a diagram in Schedules 1 to 11 so placed shall not be retained on or near the road after the completion of the works or the removal of the obstruction, as the case may be, unless—

- (a) it is a sign of the type shown in diagram 7009, in which case that sign may be retained on or near a road after the completion of the works for so long as the traffic authority for the road thinks fit; or
- (b) it is a sign of the type shown in diagram 7012 bearing the words "NO GIVE WAY MARKINGS" or "NO STOP MARKINGS", in which case that sign shall be removed as soon as the road markings have been replaced and in any event not later than 28 days after the completion of the works.

32. A sign shown in diagram 790 or 7014 may be placed on or near a road only in connection with works involving an alteration in the layout of the carriageway or involving the removal of or a change in the road markings or other traffic signs placed on or near a road or, in the case of the sign shown in diagram 790, at an automatic railway level crossing, and may be retained for not more than 3 months after completion of those works.

33.—(1) No sign of the kind referred to in regulation 41 may be retained at any place for more than six months (or such longer period as the Secretary of State may approve) after the placing of the sign there or in any event after the sign has ceased to be needed at that place.

(2) The sign shown in diagram 2701 may be retained on or near a road for not more than six months after completion of the housing development to which it refers.

34.—(1) A sign shown in diagram 7023 or 7024 may be placed on or near a road only where oneway working is necessary owing to a temporary closure to vehicular traffic of a part of the width of the carriageway of the road.

(2) A sign shown in diagram 829.1, 829.2, 829.3, 829.4 or 1063 may be placed on or near a road only by a constable in uniform or a person acting under the instructions or authority of the chief officer of police.

(3) A sign shown in diagram 554 (when varied to "Flood" or "No smoking"), 554.2 (when placed in conjunction with the plate shown in diagram 554.3), or 562 (when placed in combination with the plate shown in diagram 563 varied to "Accident", "Census", "Dust cloud", "Fallen tree", "Overhead cable repairs" or "Smoke") may be retained only on or near a road for so long as the hazard indicated by the sign continues to exist or is expected to recur in the near future.

(4) The sign shown in diagram 950 may be placed in combination with the plate shown in diagram 950.1 only while the training or testing of child cyclists is in progress.

Placing of signs varied to show metric units

35.—(1) Where the indication given by a sign shown in diagram 629, 629.1, 780, 780.1 or 780.2 is varied in accordance with regulation 17 and item 2 of Schedule 16, that sign may be placed only in combination with another sign of the same type whose indication has not been so varied.

(2) Paragraph (1) shall apply when a sign shown in diagram 629 or 629.1 is incorporated as a symbol into another sign.

Mounting and backing of signs

36.—(1) Where a sign shown in a diagram (other than the diagrams referred to in paragraphs (2) to (4) or direction 38 or 39) in Schedules 1 to 5, 7, Part II of Schedule 10, Schedule 12 or a sign prescribed in regulation 41 is mounted on a post specially provided for the purpose ("the post"), that part of the post which extends above ground level shall be coloured grey or black, except that—

- (a) where the post is made of aluminium, concrete, galvanised metal or wood, the post may retain its natural colour; and
- (b) where the post is not likely to be readily visible to pedestrians if wholly coloured grey or black, a yellow or white band not less than 140 nor more than 160 millimetres deep may be provided on the post, the lower edge of the band being not less than 1500 nor more than 1700 millimetres above ground level.

(2) Where a beacon or lamp of a kind prescribed by regulation 42 or 43 is mounted on a structure specially provided for the purpose, the structure shall be coloured grey, red, white or yellow, or in alternate bands of red and white or of black and white.

(3) The post provided for the mounting of the sign shown in diagram 605.2 shall be coloured in alternate black and yellow bands each 300 millimetres deep with a black band uppermost below the bottom of the sign face, and the yellow bands may be illuminated by means of retroreflecting material.

(4) A post or other support provided for the mounting of a sign shown in diagram 651, 970, 971, 972, 973, 973.1, 2610, 2610.1, 2610.2, 7104 or 7105 may be of any colour.

37.—(1) The back of any sign shown in a diagram in Schedules 1 to 5, 7, Part II of Schedule 10 or in Schedule 12, or prescribed in regulation 41, other than a sign shown in diagram 651, 970, 971, 972, 973, 973.1, 2610, 2610.1, 2610.2, 7101, 7102, 7103, 7104 or 7105, and the back of any backing board or other fitting provided for the assembly of such a sign including any container enclosing apparatus for the illumination of that sign, shall be coloured—

- (a) black if the sign is mounted on the same post as that on which light signals prescribed in regulation 30(2) (or those signals as varied by regulation 31) or light signals prescribed in regulation 30(3) and regulation 32 are mounted; or
- (b) grey, black or in a non-reflective metallic finish in any other case, except that—
 - (i) information about sites for placing and the ownership of the sign may be indicated on the back of the sign in characters not exceeding 15 millimetres in height; and
 - (ii) information about the manufacture of the sign required in order to comply with British Standard Specification BS 873 or an equivalent specification of a European Economic Area State, occupying an area not exceeding 30 square centimetres, may be indicated on the back of the sign in characters not exceeding 5 millimetres in height.

(2) The back of a sign shown in diagram 7104 or 7105 shall be coloured grey, red, white, black or yellow, except that—

- (a) information about sites for placing and the ownership of the sign may be indicated on the back of the sign in characters not exceeding 15 millimetres in height; and
- (b) information about the manufacture of the sign required in order to comply with British Standard Specification BS 873 or an equivalent specification of a European Economic Area State, occupying an area not exceeding 30 square centimetres, may be indicated on the back of the sign in characters not exceeding 5 millimetres in height.

(3) The back of a sign shown in diagram 651, 970, 971, 972, 973, 973.1, 2610, 2610.1 or 2610.2 may be of any colour.

(4) The front of any backing board for a sign mounted otherwise than as described in paragraph (1)(a) shall be coloured either grey or yellow.

(5) Any sign shown in a diagram in Schedules 1 to 5, 7, Part II of Schedule 10, or Schedule 12 which has a red or black border may have a white edge added not less than 10 nor more than 20 millimetres wide, outside that border.

(6) In this direction "backing board" in relation to a sign includes any background against which the sign is displayed.

Mounting of the sign shown in diagram 781

38. The sign shown in diagram 781 shall be mounted on two posts and so much of each post as extends above ground level shall be coloured black and white in alternate horizontal bands, each band being not less than 250 nor more than 335 millimetres deep.

Mounting of the signs shown in diagrams 560 and 561

39.—(1) A sign shown in diagram 560 or 561 shall be so placed that the top of the sign is not less than 550 nor more than 1000 millimetres above the surface of the adjacent carriageway.

(2) Where a sign shown in diagram 560 or 561 is mounted on a post specially provided for the purpose that part of the post which extends above ground level shall be coloured black and white in alternate horizontal bands, each band being not less than 225 nor more than 350 millimetres deep.

- (3) The signs shown in diagrams 560 and 561 shall be so erected as to display—
 - (a) the colour red on the left hand edge of the carriageway as viewed by the drivers of approaching vehicles; and
 - (b) the colour white on the right hand edge of the carriageway when so viewed, unless the edge is the edge of the carriageway of a dual carriageway road when the colour amber shall be displayed.

Mounting of refuge indicator lamps

40.—(1) Save as provided in paragraph (2), where the lamp prescribed in regulation 45 is mounted on a post specially provided for the purpose—

- (a) if the post is placed on a street refuge or central reservation of a zebra crossing and yellow globes are attached to or mounted on the post—
 - (i) the part of the post between ground level and the point where the yellow globes are mounted or attached shall be coloured black and white in alternate horizontal bands, the lowest band visible to approaching traffic being coloured black and not less than 275 millimetres nor more than 1 metre deep, and each other band being not less than 275 nor more than 335 millimetres deep; and
 - (ii) beyond the point referred to in sub-paragraph (a)(i) any remaining part of the post shall be coloured in accordance with sub-paragraph (b); and
- (b) if the post—
 - (i) is a post placed as mentioned in sub-paragraph (a) but yellow globes are not attached to or mounted on it; or
 - (ii) is placed elsewhere than on a zebra crossing,

the post shall be coloured grey or black but with two white bands (each band being not less than 275 nor more than 335 millimetres deep) so arranged that—

(i) at least 275 nor more than 335 millimetres extend between the nearest edges of the two bands; and

(ii) the upper edge of the uppermost band is not less than 275 nor more than 335 millimetres below the lowest part of the lamp,

and the white bands may be internally illuminated.

(2) Where a post of the kind mentioned in paragraph (1) consists of aluminium, concrete or galvanised metal it may remain in its natural colour.

(3) In this paragraph "zebra crossing" has the same meaning as in the 1971 Regulations and "yellow globes" means globes in relation to which Part II of Schedule 2 to the 1971 Regulations is complied with.

Mounting and backing of light signals, matrix signs and warning lights

41.—(1) Light signals such as are prescribed in regulations 30, 31, 32, 34, 35, 37 and 38, the matrix signals prescribed in regulation 36 and the warning lights prescribed in regulations 39(2) and 40 may be placed on or near a road only if they are so placed that they face the stream of traffic to which they are intended to convey the warnings, information, requirements, restrictions or prohibitions prescribed by the Regulations.

(2) The containers enclosing the lamps of each of the types of light signals, matrix signs or warning lights mentioned in paragraph (1) shall be coloured black except that, if those containers enclose lamps of the light signals prescribed in paragraph (5) or (7) of regulation 30, or in regulation 34 or 35, the matrix signs prescribed in regulation 36 or the warning lights prescribed in regulation 39(2) and 40, they may be coloured grey instead of black.

(3) Any of the kinds of light signals mentioned in paragraph (1) other than the signals prescribed in regulation 30(7) may be mounted on a backing board, which shall be coloured black and may have a white border not less than 45 nor more than 55 millimetres wide.

(4) In the case of the light signals prescribed in of regulation 30(7) the back of the backing board shown in diagram 3014 may be coloured black or grey.

(5) In the case of the matrix signs prescribed in regulation 36, an identification number may be shown on the front of the backing board below the signal in the manner shown in diagram 6022.

(6) Without prejudice to paragraph (7), where light signals prescribed in any of the regulations specified in paragraph (1) or shown in a diagram in Part I of Schedule 10 or in Schedule 11 are mounted on a post specially provided for the purpose, that part of the post which extends above ground level shall be coloured grey or black and may have one yellow or white band not less than 140 nor more than 160 millimetres deep, the lower edge of the band being not less than 1500 nor more than 1700 millimetres above ground level.

(7) The light signals, matrix signs or warning lights prescribed in regulation 32, instead of being mounted on a post coloured in accordance with paragraph (6), may be mounted on a post coloured yellow (but having no yellow or white band as specified in paragraph (6)) or on a tripod coloured yellow.

Placing of road marking shown in diagram 1001 in conjunction with light signals

42.—(1) The light signals prescribed in paragraph (2), (3) or (7) of regulation 30 may be placed only in conjunction with the road marking shown in diagram 1001, except that this paragraph shall not apply while works which necessitate the temporary removal of that road marking are being executed on a road near the light signals.

(2) Where both primary and secondary signals within the meaning of regulation 33(6) have been erected, the references in paragraph (1) to light signals shall be construed as references to—

- (a) both the primary and the secondary signals;
- (b) the primary signals operating alone; or

(c) the secondary signals operating alone,

as the case may be.

Placing of road marking shown in diagram 1014 in conjunction with the road marking shown in diagram 1013.1 or 1013.3

43.—(1) At least one road marking of the type shown in diagram 1014 shall be placed in conjunction with a road marking of the type shown in diagram 1013.1 or 1013.3 on the length of carriageway which extends backwards from the commencement of any continuous line marked on the carriageway as a part of the road marking shown in diagram 1013.1 or 1013.3, such commencement being viewed in the direction of travel of a vehicle driven so as to have and keep that continuous line on the right hand or off side thereof in accordance with regulation 26(2)(b).

(2) If more than one road marking of the type shown in diagram 1014 is placed on a length of carriageway, then the road markings shall be so spaced apart that one follows in line behind the other.

Placing of light signals prescribed in regulation 30(5) and in regulation 35 and signs and light signals shown in Schedule 11

44. The light signals prescribed in regulation 30(5) and regulation 35 and the signs and light signals shown in any diagram in Schedule 11 may be displayed only on or near—

- (a) a motorway; or
- (b) a dual carriageway road.

45. The light signals prescribed in regulation 30(5) shall not be displayed over or in relation to a traffic lane at the same time as any sign shown in diagram 6001, 6002, 6003, 6006, 6006.1, 6008, 6009, 6009.1, 6009.2, 6011 or 6012 is also being displayed over or in relation to that same traffic lane and at the same place on that lane.

46. A sign shown in diagram 6021 or 6031.1 may be displayed only over a traffic lane and a sign shown in diagram 6006, 6006.1, 6006.2, 6008, 6008.1, 6009, 6009.1, 6009.2, 6009.3, 6022 or 6032.1 may be displayed only at the side of the carriageway to which the indications given by the sign relate, or projecting over part of that carriageway, so as to communicate information to drivers in all traffic lanes.

Placing of light signals prescribed in regulation 32

47. Portable light signals may be placed for the control of vehicular traffic only at a site approved by the traffic authority except—

- (a) where the signals are being operated and maintained by and are under the regular supervision of a constable during the progress of a temporary scheme of traffic control;
- (b) on a length of road along which-
 - (i) there is no junction carrying vehicular traffic to or from it; and
 - (ii) the width of the carriageway is temporarily restricted so as to carry only one line of traffic;
- (c) at a level crossing when work in relation to that crossing is being carried out; or
- (d) on a road adjacent to the temporary site of road, building or engineering works used for the movement of vehicles, materials, plant or equipment within the site of the works.

Placing of various light signals

48.—(1) The light signals shown in diagram 4004 may be placed only in conjunction with the sign shown in diagram 545 when placed in conjunction with the plate shown in diagram 546 or 547.1.

(2) The light signals shown in diagram 4005 may be placed on or near a road only when the sign shown in diagram 548 in conjunction with the plate shown in diagram 548.1 is placed in advance of those signals.

(3) The light signals shown in diagram 4006 may be placed only in conjunction with the light signals shown in diagram 3014.

(4) The sign shown in diagram 4003 may be placed only in conjunction with the light signals shown in diagram 4002 for the purpose of conveying to pedestrians the indications specified in diagram 4003.

(5) The light signals shown in diagram 4002 may be placed only in conjunction with the light signals prescribed in paragraphs (2) or (3) of regulation 30.

(6) The light signal shown in diagram 776 may be placed only at or near a level crossing and the legend shall be displayed to road traffic in black letters on a red background which is internally illuminated by means of electricity only when a railway vehicle or tramcar has just passed over the level crossing and another is approaching.

Approval of signs and signals

49.—(1) Save as provided in this direction, the light signals prescribed in regulations 30, 31, 32, 34, 35, 37 and 38, the matrix signs prescribed in regulation 36, the warning lights prescribed in regulations 39(2) and 40, the audible and tactile signals prescribed in regulation 37, a sign shown in diagram 618.3A, 776 or 2509, any light signals or signs shown in a diagram in Schedule 11, variable message signs and any other signs not continuously in use over a period of 24 hours and which are capable of being brought into and taken out of use by the operation of any electrical or other apparatus may be placed on or near a road only if at the time that they are first placed—

- (a) the signal, sign or any apparatus (including the content of all instructions stored in, or executable by it) used in connection with the signal or sign is approved in writing in accordance with the relevant requirements laid down by the Secretary of State; and
- (b) in the case of signals prescribed in regulation 30(7) or regulation 38 the signals are to be erected at or near a level crossing, and the site for, and the number and disposition of, those signals has first been approved in writing by or on behalf of the Secretary of State.

(2) Paragraph (1)(b) shall not apply to signals displayed to indicate the effect of Orders made by the Secretary of State under—

- (a) section 66 of the British Transport Commission Act 1957(6);
- (b) section 124 of the Transport Act 1968(7); or
- (c) section 1 of the Level Crossings Act 1983(8).

(3) If, after a signal or sign has been placed in accordance with an approval under paragraph (1), the signal, sign or any apparatus used in connection with the signal or sign is altered, the signal or sign shall not be further used unless that alteration is approved in writing by or on behalf of the Secretary of State.

(4) Paragraphs (1) and (3) shall not apply to variable message signs which are only manually operated without any assistance by electrical or mechanical means.

^{(6) 5 &}amp; 6 Eliz. 2 c.xxxiii.

⁽**7**) 1968 c. 73.

^{(8) 1983} c. 16.

(5) When any signal or sign has been placed in accordance with an approval under paragraph (1), the signal, the sign or any apparatus used in connection with the signal or sign, including any alterations approved in accordance with paragraph (3), shall be regarded as continuing to be approved until notice is given in writing by the Secretary of State—

- (a) to the traffic authority; and
- (b) either—
 - (i) to the supplier of the equipment; or
 - (ii) where an alteration has been approved in accordance with paragraph (3), to the person who carried out the alteration,

of a date after which the signal, sign or apparatus is no longer to be so regarded.

(6) Where notice is given under paragraph (5) that a signal, sign or any apparatus used in connection with the signal or sign shall no longer be regarded as being approved that signal, sign or apparatus shall be removed from the road on or before the date given in the notice.

Approval of studs

50.—(1) Studs incorporating reflectors, retroreflecting material or a steady or intermittent light source may be placed on a road only if such studs are approved in writing in accordance with requirements laid down by the Secretary of State.

(2) When any stud has been placed in accordance with an approval under paragraph (1), the stud shall be regarded as continuing to be approved until notice is given in writing by the Secretary of State to the supplier and to the traffic authority of a date after which the stud is no longer to be so regarded.

(3) Where notice is given under paragraph (2) that a stud is no longer to be regarded as being approved that stud shall be removed from the road on or before the date given in the notice.

Special directions by the Secretary of State

51. Nothing in these Directions shall be taken to limit the power of the Secretary of State acting as the appropriate Minister by any special direction to dispense with, add to or modify any of the requirements of these Directions in their application to any particular case.

APPENDIX 1

EXERCISE OF POWERS

1. The Regulations in Part I of this Instrument are made by the Secretary of State for Transport, the Secretary of State for Scotland and the Secretary of State for Wales—

- (a) acting jointly, in exercise of the powers conferred on them by section 64 of the Road Traffic Regulation Act 1984(9) and section 36(5) of the Road Traffic Act 1988(10); and
- (b) acting severally, in relation to England, to Scotland and to Wales respectively, in exercise of the powers conferred on them by section 28 of the said Act of 1984 and of all other enabling powers.

2. The Directions in Part II of this Instrument are given by the said Secretaries of State acting jointly, in exercise of the powers conferred on them by sections 65 and 85(2) of the said Act of 1984.

^{(9) 1984} c. 27. Section 64(5) was amended by the Road Traffic (Consequential Provisions) Act 1988, Schedule 3; section 65(1) was substituted by the New Roads and Street Works Act 1991, Schedule 8, paragraph 28; section 65(1A) was inserted by the Road Traffic Act 1991, Schedule 4, paragraph 29; and section 85(2) was amended by the New Roads and Street Works Act 1991, Schedule 8, paragraph 62. For the meaning of "the Ministers", in section 64(1)(a) and section 65(1), and of "prescribed", see section 142(1).

^{(10) 1988} c. 52.

APPENDIX 2

INSTRUMENTS REVOKED

Regulation 2 and Direction 2

Traffic Signs (Speed Limits) Regulations and General Directions 1969(11) Traffic Signs (Speed Limits) (Amendment) Regulations and General Directions 1977(12) *Traffic Signs Regulations and General Directions 1981(13) *Traffic Signs (Amendment) Regulations 1982(14) *Traffic Signs General (Amendment) Directions 1982(15) *Traffic Signs General (Amendment) Directions 1983(16) *Traffic Signs (Amendment) Regulations 1983(17) *Traffic Signs (Amendment) Regulations and General Directions 1984(18) Traffic Signs (Amendment) Regulations 1986(19) Traffic Signs (Amendment) Regulations and General Directions 1989(21) Traffic Signs (Amendment) Regulations and General Directions 1989(21) Traffic Signs (Amendment) Regulations and General Directions 1989(22)

Signed by authority of the Secretary of State for Transport

20th May 1994

Robert Key Parliamentary Under Secretary of State Department of Transport

Signed by authority of the Secretary of State for Scotland

James Douglas-Hamilton Parliamentary Under Secretary of State Scottish Office

25th May 1994

(11)	S.I. 1969/1487.
(12)	S.I. 1977/952.
(13)	S.I. 1981/859.
(14)	S.I. 1982/1879.
(15)	S.I. 1982/1880.
(16)	S.I. 1983/1086.
(17)	S.I. 1983/1088.
(18)	S.I. 1984/966.
(19)	S.I. 1986/1859.
(20)	S.I. 1987/1706.
(21)	S.I. 1989/2139.
(22)	S.I. 1990/704.

26th May 1994

John Redwood Secretary of State for Wales