SCHEDULE 12

Regulation 3, Direction 3

Directional signs

PART 1

General provisions applying to Parts 2 to 20

- 1. Information of a description in column 2 of a sign table in Parts 3, 5, 7, 9, 11, 12, 14, 15, 16, 17, 18, or 20 of this Schedule, or a combination of any such descriptions, must be conveyed by a sign (a "directional sign") consisting of the legend or symbol, or a combination, provided for in respect of that description or descriptions in accordance with the provisions of this Part and Parts 2 to 20 on an appropriate background.
- **2.** Subject to paragraph 4, an appropriate background for a sign of a description specified in column 2 of an item in the Part 2 sign table is one of the colour and type shown in either diagram A or B of the item.
- **3.** A legend on a directional sign must be of a height provided for in column 4 of the Part 2 sign table (unless in relation to a particular legend it is provided elsewhere that the legend is to be a different height) and the sign must be of a size appropriate to accommodate its elements (including any legend).
 - 4. An appropriate background may differ from diagram A or B in that—
 - (a) a diagram A sign background may be divided into separate panels;
 - (b) a diagram B sign background may be reversed to point to the left; and
 - (c) the background at item 8 or 9 of the sign table in Part 2 (signs for cyclists and pedestrians respectively) may be varied in accordance with column 4 at that item.
- **5.** Where a sign indicates a road or route and that road or route is temporarily closed, a board coloured red and displaying in white lettering the words "Road temporarily closed" or "Route temporarily closed" may be fixed to the sign, or to that part of the sign where that road or route is indicated, in order to cancel temporarily the indication.
- **6.**—(1) A sign with a background provided for at item 5, 8 or 9 of the Part 2 sign table need not be illuminated.
- (2) Sub-paragraph (1) does not apply to a sign with an item 5 background when placed on a motorway or if the sign—
 - (a) gives directions to a leisure facility of a description at item 5, 6, 7, 10, 11 or 12 of the Part 14 sign table; or
 - (b) includes the legend "Tourist hostel".
- 7. A directional sign which only conveys directions to a telephone or public toilets (or both) need not be illuminated.
- **8.** Where a diagram A sign with a background provided for at item 1 in the Part 2 sign table is mounted above the carriageway of a motorway within 50 metres of any lamp which forms part of a system of street-lighting, the illumination requirements for the sign are—
 - (a) where that system of street-lighting is illuminated throughout the hours of darkness, the sign must be illuminated by internal or external lighting for so long as that system is illuminated and may also be reflectorised; or
 - (b) where that system of street-lighting is not illuminated throughout the hours of darkness—

- (i) the sign must be illuminated by internal or external lighting for so long as that system is illuminated or and must also be reflectorised, or
- (ii) the sign must be illuminated throughout the hours of darkness by internal or external lighting and may also be reflectorised.

Sign background for directional signs for motorways, primary routes, non-primary routes, cyclists and pedestrians

Sign table — Schedule 12, Part 2

		F		
(1)	(2)	(3)	(4)	
Itei	n Description	Sign background	Height of legend and variants	
1	Sign placed on or near a		An x-height that is not less than 100 mm and not more than 400 mm	
	motorway or placed on or near another road			
	at a junction indicating a route leading directly to a	A	В	
	motorway (Type A and B)			
2	Sign placed on or near a primary		An x-height that is not less than 50 mm and not more than 300 mm	
	route (Type A and B)			
		A	В	
3	Sign placed on or near a non-primary route		An x-height that is not less than 50 mm and not more than 300 mm	
	(Type A and B)		>	
		Α	В	
4	Sign placed on a motorway,		An x-height that is not less than 50 mm and not more than 400 mm	
	primary or non- primary route showing only)	
	parking place destinations	Α	В	

(1)	(2)	(3)	(4)
Itei	n Description (Type A and B)	Sign background	Height of legend and variants
5	Sign placed on a motorway, primary or non-primary route showing only tourist destinations or leisure facilities	A	An x-height that is not less than 50 mm and not more than 400 mm
6	(Type A and B) Sign placed on a primary or non-primary route showing only Ministry of Defence establishments		An x-height that is not less than 50 mm and not more than 300 mm
7	(Type A and B)		Any height that is not loss than 50 mm
,	Sign placed on a motorway, primary or non- primary route		An x-height that is not less than 50 mm and not more than 400 mm
	showing only recommended routes for goods vehicles	A	В
	ahead (Type A and B)		
8	Sign placed on a road, other than a motorway, showing routes for cyclists		1. An x-height that is not less than 25 mm and not more than 60 mm 2. The background may be varied
	(Type A and B)	Α	to brown when the sign shows only tourist destinations or leisure facilities
9	Sign placed on a road, other than on a motorway, showing routes for pedestrians		An x-height that is not less than 25 mm and not more than 60 mm The background, border and any chevron, legend, symbol or logo may
	or equestrians	А	be in any contrasting colours B

(1)	(2)	(3)	(4)
Iter	n Description	Sign background	Height of legend and variants
	(Type A and B)		3. The border, chevron or both may be omitted
			4. The shape of the pointed end of diagram B may be varied
			angium 2 may 66 tunea

Legends that may be shown on signs in Part 2

- 1. Information of a description in column 2 of an item in the sign table in this Part must be conveyed on a directional sign by one or more of the legends in column 3 of that item on an appropriate background.
- 2. The inclusion of a legend is subject to such restrictions, and further descriptions, as are given in column 3 in respect of that legend and any restriction provided for is without prejudice to any provision elsewhere in this Schedule that provides that legends contained in Part 3 may be placed on a directional sign in a manner that does not comply with the restriction.
- **3.**—(1) Any word forming part of a legend provided for in the sign table in this Part may be written—
 - (a) entirely in lower case letters;
 - (b) entirely in capital letters; or
 - (c) in a mixture of capital and lower case letters.
- (2) Paragraph (1) does not apply where alternative provision for a word is made in the sign table in this Part.
- **4.**—(1) This paragraph applies to a legend provided for in this Part in the following circumstances—
 - (a) the legend is the name of a place that is a city, town, village or tourist destination; and
 - (b) the directional sign on which the legend appears—
 - (i) has a background provided for at item 2, 3 or 5 of the sign table in Part 2; and
 - (ii) is placed on a road in Scotland (except when placed on a motorway).
- (2) The name of the place may be written in Scottish Gaelic, in addition to English, provided the Scottish Gaelic version is shown above the English.
- (3) Where the name is the same in English and Scottish Gaelic, it may be written only once on the sign in a manner which complies with the requirements of these Regulations applicable to a name written in—
 - (a) English; or
 - (b) Scottish Gaelic.

Sign table — Schedule 12, Part 3

(1)	(2)	(3)
Iter	n Descripti	o h egends, restrictions and connected provisions
1	direction	nA legend provided for at entry 3 of this item must only be used on a sign with a background provided for at item 9 of the sign table in Part 2.
	or type of route	1. The name of—
		(a) a place, which may be followed by: "city centre", "town centre", "village" or "village centre";
		(b) a geographical area;
		(c) the name of a road;
		(d) an airport, heliport, railway station, port, tunnel, bridge, crossing or other transport facility;
		(e) a local destination not covered by (a) to (d), which may include a generic description of a facility
		2. "City centre", "Town centre", "Village centre", "Village only", "Other routes", "Other traffic", "Local traffic only", "Through traffic", "Ring road" or "Non-motorway traffic"
		3. "Public Footpath", "Footpath", "Bridleway", "Byway", "Restricted Byway", "Concessionary Path", "Permissive Path" (or other appropriate description for conveying the direction of a public right of way, concessionary path or permissive path). That word or phrase may be followed by—
		(a) a place, area or destination mentioned at entry 1; or
		(b) "city centre", "town centre", "village" or "village centre", whether or not immediately preceded by "to"
		4. The additional identifiers of a destination, or a combination of identifiers, mentioned at entry 5 may be added in brackets after—
		(a) a place, area or destination mentioned at entry 1 (including where used in an entry 3 legend);
		(b) a phrase mentioned at entry 2; or
		(c) "city centre", "town centre", "village" or "village centre" as referred to in an entry 3 legend
		5. The additional identifiers are—
		(a) a compass point ("North", "South", "East" or "West");
		(b) an abbreviated compass point ("N", "S", "E", "W", "NW", "NE", "SW" or "SE");
		(c) "Central" or "C" (meaning "Central");
		(d) "City";
		(e) the name of an area that forms part of the destination to which the additional identifier relates and, where more than one identifier is used, they must be separated by a comma except that, where only two are used or to separate the final two identifiers, "&" must be used instead

(1)	(2)	(3)		
Iter	Item DescriptionLegends, restrictions and connected provisions			
		6. "only" may be added after—		
		(a) a place, area or destination mentioned at entry 1(a) to (e) (including when used in an entry 3 legend);		
		(b) a phrase mentioned at entry 2 (except "Village only" or "Local traffic only"); or		
		(c) "city centre", "town centre", "village" or "village centre" as referred to in entry 3, and where any additional identifiers are used, "only" must come after them (and the bracket)		
		7. An indication that—		
		(a) a footpath or other route mentioned in entry 3 is closed;		
		(b) the direction of an alternative route where the footpath or other route is closed		
2	of	A legend provided for at this item must only be used together with a legend provided for at item 1 or 3 of this table		
	alternative routes	1. "via toll road", "via toll", "via tunnel", "via ferry" or "via" and the name of a destination or a route number		
		2. "unsuitable for" and one, or any appropriate combination, of the following—		
		(a) "heavy goods vehicles", (b) "HGVs", (c) "long vehicles", (d) "wide vehicles", (e) "buses", (f) "caravans", (g) "trailers", (h) "articulated vehicles" or (i) "light vehicles only", with "and" inserted before the last legend where more than one is used		
		3. "alternative route"		
		4. "alternative route for" and one or any appropriate combination of the following—		
		(a) "goods vehicles", (b) "light vehicles only", (c) "heavy vehicles", (d) "HGVs", (e) "high vehicles", (f) "long vehicles", (g) "wide vehicles", (h) "buses", (i) "caravans", (j) "trailers", (k) "articulated vehicles", or (l) "prohibited vehicles", with "and" inserted before the last where more than one is used		
		5. "avoiding" and a place name or other destination, or one or any appropriate combination of the following—		
		 (a) "steep hill"; (b) "swing bridge"; (c) "lifting bridge"; (d) "low bridge"; (e) "weak bridge"; (f) "ford"; (g) "gated road"; (h) "toll road"; (i) "tunnel"; (j) "town centre"; (k) "level crossing". The word "and" must be inserted before the last where more than one is used 		
		6. "route for goods vehicles" or "route for non-motorway traffic"		
		7. "light vehicles only" The x-height of any legend provided for at entries 1 to 7 must be 80% of the height used for the item 1 or 3 legend to which it relates.		

(3)

Iter	n Descripti	onLegends, restrictions and connected provisions
3	legends for signs	lA legend provided for at this item may be used on its own or together with a legend provided for at item 1, 2, 5, 6 or 9 of this table but only on a background provided for at item 5, 8 or 9 of the Part 2 sign table
	showing only	1. The name or generic description of an attraction or facility
	tourist destination	2. The expression "Hotel", "Hotels", "B & B" or "Hotel and B & B" used as generic description for overnight accommodation
	and leisure facilities	3. "Youth Hostel" (but only when the hostel in question is controlled or approved by YHA (England and Wales)(1) or the Scottish Youth Hostels Association(2)) or "Tourist hostel"
		4. The name of a city, town or village and, on a separate line, "historic market town" or other descriptive phrase provided that the x-height of the descriptive phrase is 80% of that used for the name of the city, town or village
		5. "Country Tour", or "Tour", preceded by a place name or an appropriate description
		6. "Tourist route to", "Tourist trail to", "Scenic route to", "Scenic trail to", "Coastal route to" or "Coastal trail to" and a destination
		7. "Tourist route" or a route title
4	Route identificat	A legend provided for in this item may be used on its own (except entries 7 ional 8) or together with a legend provided for at item 1 of this table. A legend provided for at entries 1 to 7 may be placed on a background provided for at item 1, 2, 3 or 7 of the Part 2 sign table
		1. Identification numbers of routes may be included on a directional sign; route numbers must be white on a blue or black background, yellow on a dark green background and black on a white background
		2. A compass point ("North", "South", "East" or "West") or an abbreviated compass point ("N", "S", "E", "W", "NW", "NE", "SW" or "SE") may be added to the route number, shown in brackets in the same colour as the route number
		3. Identification numbers of routes to which a particular route, with a different identification number, leads must be shown in brackets; a compass point ("North", "South", "East" or "West") or an abbreviated compass point ("N", "S", "E", "W", "NW", "NE", "SW" or "SE") may be added alongside the number within the same pair of brackets; where a route leads indirectly to a primary route and the route number of the primary route is the same as the route number of the non-primary route to be followed from the junction ahead, the number must be shown without any brackets
		4. Superseded route numbers may be retained provided they are cancelled with a diagonal red bar
		5. Where a route leads indirectly to a motorway, the motorway route number, with or without a compass point ("North", "South", "East" or "West") or an abbreviated compass point ("N", "S", "E", "W", "NW", "NE", "SW" or "SE"),

 ⁽¹⁾ Registered company number (England and Wales) 282555 and registered charity number (England and Wales) 306122.
 (2) Registered company number (Scotland) SC310841 and registered charity number (Scotland) SC013138.

(1)	(2)	(3)		
Ita		ollegends, restrictions and connected provisions		
Tiei	n Descripii	must be shown in brackets in white on a blue patch and the blue patch must have a white border when placed on a dark green or black background		
		6. Where a directional sign with a background provided for at item 3 of the Part 2 sign table (or a panel provided for at item 3 of the sign table in Part 9 – see that panel and Part 8) includes the number of a primary route to which a non-primary route leads—		
		(a) the identification number of the primary route and any compass point must be shown in brackets in yellow on a dark green patch where the primary route has a different identification number to that of the non- primary route; or		
		(b) the identification number of the primary route without any brackets together with any compass point in brackets must be shown in yellow on a dark green patch where the primary route has the same identification number as the non-primary route		
		7. On a directional sign with a background provided for at item 7 of the Part 2 sign table (or the panel at item 5 of the sign table in Part 9 - see that panel and Part 8)—		
		(a) other than when the sign is placed on a motorway, the route number of a primary route, together with any brackets and compass point, must be shown in yellow on a dark green patch with a white border;		
		(b) when the sign is placed on a motorway, the requirements of entry 5 need not be complied with		
		8. The name or description of a cycle route may be shown (in capital letters), with a letter height that is 80% of the item 1 legend height, at the top of a directional sign with a background provided for at item 8 of the Part 2 sign table and may include a symbol of any appropriate design and colour with a height not exceeding that of the pedal cycle symbol shown at item 3 of the sign table in Part 11		
		9. The name or description of a route for pedestrians or horse riders and an identifying symbol of a route in any combination may be used on a background provided for at item 9 of the Part 2 sign table		
5	Distances	A legend provided for at this item may only be used on a sign that includes a legend provided for at item 1 or 3 of this table except that where the distance to a junction forms part of an overhead sign assembly it may be shown as a separate sign		
		1. A distance		
6	Journey times	A legend provided for at this item may only be used together with a legend provided for at item 1 or 3 of this table but only on a background provided for at item 8 or 9 of the Part 2 sign table		
		1. The journey times to destinations, where shown, which must be expressed in hours denoted by "hour", "hours", "hr" or "hrs", and minutes denoted by "mins" as appropriate		
7	Junction identificat	A legend provided for at this item may only be used on a sign that includes a largend provided for at item 1 of this table		

(1)	(2)	(3)		
Iter	tem DescriptionLegends, restrictions and connected provisions			
	-	1. The name of the junction or, where the sign is situated at or near the boundary of a town, village or suburb, the place name of that town, village or suburb may be added (in capital letters) in a separate panel at the top of a diagram A sign provided for at item 2 or 3 of the Part 2 sign table. The letters must be white on a dark green background on a primary route and black on a white background on a non-primary route		
		2. The junction number may be shown in white characters on a black patch on a directional sign with a background provided for at items 1, 2 and 3 of the Part 2 sign table provided the x-height of the junction number is 80% of the legend provided for at item 1. The patch must have a white border when placed on a blue or dark green background		
		3. Where the name of the junction, place name or junction number forms part of an overhead sign assembly it may be shown as a separate sign		
		4. Where the junction number and the distance to the junction form part of an overhead sign assembly they may be combined into a separate sign		
8	Route to be followed	1. "For" and one or two destinations, one or two route numbers or a route number and a destination, separated, where applicable, by "and" or "&", and—"follow" and a destination, route number or an appropriate symbol shown in Parts 11 to 18; "follow" and a description of a route; "leave at next junction"; "leave at junction" and the name of a junction; "leave at Junction" and the number of the junction; "leave at J" and the number of the junction; "use" and a route number and "at next junction"; "use" and a route number and "at Junction" and the number of the junction; "use" and a route number and "at Junction" and the number of the junction; "use" and a route number and "at J" and the number of the junction; or "use" and the Park & Ride symbol shown at item 24 of the sign table in Part 11.		
		2. In entry 1—		
		(a) "destination" refers to a legend provided for—		
		(i) in entries 1 and 2 at item 1 (whether or not adapted in accordance with other entries at that item); or		
		(ii) at item 3, of this table except that it also includes "Park and Ride" and "Park & Ride" whether or not, in either case, the phrase is preceded by the name of a place; and		
		(b) "route number" refers to a legend provided for at item 4.		
		3. For the purposes of this item—		
		(a) entry 1 of item 4 is be read as requiring route numbers to be white when placed on a brown background; and		

(1)	(2)	(3)
Iter	n Descripti	o L egends, restrictions and connected provisions
		(b) identification numbers of routes to which a particular route, with a different identification number, leads need not be shown in brackets and consequently that part of entry 3 at item 4 that imposes such a requirement does not apply to a legend provided for at this item
9	Type of road	The legend provided for at this item may only be used together with a legend provided for at item 1 or 3 of this table The legend "Single track road" may be placed on a directional sign

Provisions applicable to Part 5

- 1. Information or a requirement of a description in column 2 of an item in the sign table in Part 5 must be conveyed on a directional sign by the arrows or lane marking symbols of the size, colour and type shown in the diagram in column 3, or that diagram as varied in accordance with column 5.
- **2.** The arrows and lane markings may only be placed on a diagram A background of a type which is referred to (by reference to an item number in the sign table in Part 2) in column 4 of the table in Part 5.
 - **3.** The sizes in the diagram are stroke widths.

PART 5

Arrows and lane marking symbols that may be incorporated in diagram A signs

Sign table — Schedule 12, Part 5

(1)	(2)	(3)	(4)	(5)
Ite	emDescription	Arrow and lane marking symbols	Permitted background (by reference to item number in the Part 2 sign table)	Variants
1	Arrow indicating the direction of a route (Alternative types)	16 1 14 B	1 to 9	 The direction in which the arrow shown by diagram A points may be varied The arrow must be white when appearing on the background provided for at

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Arrow and lane marking symbols	Permitted background (by reference to item number in the Part 2 sign table)	Variants
				item 1, 2, 5, 7 or 8 of the table in Part 2 of this Schedule 3. The arrow must be red when appearing on the background provided for at item 6 of the sign table in Part 2
				4. The arrow must be in any contrasting colour when appearing on the background provided for at item 9 of the sign table in Part 2
2	Arrow indicating a U-turn at a roundabout ahead	<u>20</u>	2 to 7	1. The arrow must be white when appearing on a background provided for at item 2, 5 or 7 of the sign table in Part 2 of this Schedule
				2. The arrow must be red when appearing on a background provided for at item 6 of the sign table in Part 2
3	Indication of appropriate traffic lanes and	1	1 to 7	1. The number of traffic lanes and arrows, the widths of individual lanes and the lengths of horizontal bars may be varied as appropriate 18
	direction in which to turn at a junction	11 1 1 1 11		2. The horizontal bars must be omitted where only one lane leads to a particular destination
	ahead (destinations placed above the arrows and			3. The number of marks in the lane line symbols may be varied as appropriate and a shorter mark may be added at the top or bottom of the sign

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Arrow and lane marking symbols	Permitted background (by reference to item number in the Part 2 sign table)	Variants 4. The errove love line
	bars)			4. The arrows, lane line symbols and horizontal bars must be white when appearing on a background provided for at item 1, 2, 5 or 7 of the sign table in Part 2 of this Schedule and red when appearing on a background provided for at item 6 of that table
4	Indication of appropriate traffic lanes at a junction or at a junction ahead where the left hand lane leads to one route and the two right hand lanes lead to another (destinations placed above the arrows and horizontal bar)	↑	1 to 7	1. The number of traffic lanes and arrows, the widths of individual lanes and the lengths of horizontal bars may be varied as appropriate 2. The horizontal bar must be omitted where only one lane leads to a particular destination 3. The number of marks in the lane line symbols may be varied as appropriate; a shorter mark may be added at the top or bottom of the sign 4. The arrows, lane line symbols and horizontal bars must be white when placed on a blue, dark green, brown or black background and red when appearing on a background provided for at item 6 of the sign table in Part 2 of this Schedule

(1)	(2)	(3)	(4)	(5)
Ité	emDescription	Arrow and lane marking symbols	Permitted background (by reference to item number in the Part 2 sign table)	Variants
5	Indication of appropriate traffic lanes at a junction or at a junction ahead where the routes reached from both the left hand and right hand lanes can also be reached from the centre lane (destinations placed above the horizontal bars)	↑ ↑ ↑ 1	1 to 7	1. The number of traffic lanes and arrows, the widths of individual lanes, the lengths of horizontal bars and the arrangement of shared lanes may be varied as appropriate 2. The number of marks in the lane line symbols may be varied as appropriate; a shorter mark may be added where appropriate 3. The arrows, lane line symbols and horizontal bars must be white when placed on a blue, dark green, brown or black background, and red when appearing on a background provided for at item 6 of the sign table in Part 2 of this Schedule
6	Indication of appropriate traffic lanes that diverge at a junction (destinations placed above the arrows and horizontal bar) (Alternative types)	A 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1 to 7	1. The number of traffic lanes and arrows, the widths of individual lanes and the lengths of horizontal bars may be varied as appropriate; symbol "A" may be reversed in a mirror image 2. The horizontal bar must be omitted where only one lane leads to a particular destination 3. The vertical position of the chevron road marking symbol may be varied as appropriate and the broken

(1,	(2)	(3)	(4)	(5)
Ite	mDescription	Arrow and lane marking symbols	Permitted background (by reference to item number in the Part 2 sign table)	Variants
				lane line symbol adjusted as appropriate 4. The arrows, lane line symbols and horizontal bars must be white when placed on a blue, dark green, brown or black background and red when appearing on a background provided for at item 6 of the sign table in Part 2 of this Schedule
7	Indication of appropriate traffic lanes at a junction or at a junction ahead where the centre lane divides into two directions (destinations placed above the horizontal		1 to 7	1. The number of single curved arrows, the length of the arrows and the spacing between the arrows may be varied as appropriate 2. The horizontal bar must be omitted where only one lane leads to a particular destination 3. The arrows and horizontal bars must be white when placed on a blue, dark green, brown or black background and red when appearing on a background provided for at item 6 of the sign table in Part 2 of this Schedule
8	Indication on an overhead sign of a traffic lane at a junction or at a junction ahead	17	1 to 3	1. A downward pointing arrow must be added for each additional lane that leads to the same destination 2. The length of the horizontal bar may be varied 3. The arrow, without the horizontal bar, may be shown

(1)	(2)	(3)	(4)	(5)
Iten	nDescription	Arrow and lane marking symbols	Permitted background (by reference to item number in the Part 2 sign table)	Variants
	(destinations placed above the horizontal bar) (Forms part of a sign assembly)			on a borderless rectangular supplementary plate placed below the sign with which it is associated; the plate must have the same background colour as that sign 4. The arrow and horizontal bar must be white when placed on a blue or dark green background part of the sign


Provisions applicable to Part 7

- 1. Information of a description in column 2 of an item in the sign table in Part 7 must be conveyed on a directional sign by a route symbol of the size, colour and type shown in the diagram in column 3, or that diagram as varied in accordance with column 4.
- **2.** A route symbol must only be placed on a diagram A appropriate background and must not be placed on a background provided for at item 8 or 9 in the sign table in Part 2.
 - **3.** The sizes in the diagram are stroke widths.

PART 7

Route symbols, indicating the junction layout incorporated in diagram "A"

Sign table — Schedule 12, Part 7

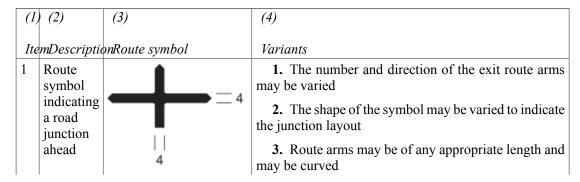

(1)	(2)	(3)	(4)
Ite	mDescriptio	onRoute symbol	Variants 4. The width of the approach arm and of any exit route arm may be varied provided that the arm is 6 stroke widths if indicating a motorway or primary route and 4 or 2.5 stroke widths if indicating a non-primary route
			5. A gap may be provided within a route arm in order to accommodate a symbol shown in a diagram in column 3 of the sign table in Part 20
			6. The symbol must be—
			(a) white, when appearing on an appropriate background provided for at item 1, 2, 5 or 7 of the sign table in Part 2; and
			(b) red, when appearing on an appropriate background provided for at item 6 of the sign table in Part 2
2	Route symbol	1 ,	1. The number and direction of the exit route arms may be varied
	indicating a roundabou	4=-	2. The shape, but not the width, of the roundabout symbol may be varied
	ahead		3. The route symbol may be varied to indicate two adjacent roundabouts
		4	4. Route arms may be of any appropriate length and may be curved
			5. The width of the approach arm and of any exit route arm may be varied provided that the arm is 6 stroke widths if indicating a motorway or primary route and 4 or 2.5 stroke widths if indicating a non-primary route
			6. A gap may be provided within a route arm in order to accommodate a symbol shown in a diagram in column 3 of the sign table in Part 20
			7. The symbol must be—
			(a) white, when appearing on an appropriate background provided for at item 1, 2, 5 or 7 of the sign table in Part 2; and
			(b) red, when appearing on an appropriate background provided for at item 6 of the sign table in Part 2.

(1) (2)	(3)	(4)
<i>ItemDescripti</i>	onRoute symbol	Variants
3 Route symbol	₹,, 1	1. The number and direction of the exit route arms may be varied
indicating a roundabou	4=~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	2. The shape, but not the widths, of the roundabout and dedicated lane symbols may be varied
ahead with a	1	3. Route arms may be of any appropriate length and may be curved
dedicated lane to the first exit	4	4. The width of the approach arm and of any exit route arm may be varied provided that the arm is 6 stroke widths if indicating a motorway or primary route and 4 or 2.5 stroke widths if indicating a non-primary route
		5. A gap may be provided within a route arm in order to accommodate a symbol shown in a diagram in column 3 of the sign table in Part 20
		6. The symbol must be—
		(a) white, when appearing on an appropriate background provided for at item 1, 2, 5 or 7 of the sign table in Part 2; and
		(b) red, when appearing on an appropriate background provided for at item 6 of the sign table in Part 2.
4 Route symbol	~	41. The number and direction of the exit route arms may be varied
indicating a mini- roundabou		2. The route symbols may be varied to indicate two adjacent mini-roundabouts
ahead (Alternativ		3. Route arms may be of any appropriate length and may be curved
types)	B	4. The width of the approach arm and of any exit route arm in the symbol shown by diagram A may be varied to 2.5 stroke widths
		5. The width of the approach arm and of any exit route arm in the symbol shown by diagram B may be varied provided that—
		(a) an arm is 6 stroke widths if indicating a motorway or primary route;
		(b) an arm is 4 or 2.5 stroke widths if indicating a non-primary route; and
		(c) one or more arms is of a stroke width of 6
		6. A gap may be provided within a route arm in order to accommodate a symbol shown in a diagram in column 3 of the sign table in Part 20
		7. The symbol must be—

(1)	(2)	(3)	(4)
Ite	mDescriptio	onRoute symbol	(a) white, when appearing on an appropriate background provided for at item 1, 2, 5 or 7
			of the sign table in Part 2; and (b) red, when appearing on an appropriate
			background provided for at item 6 of the sign table in Part 2.
5	Route symbol indicating	L .5	1. The shape of the symbol may be varied to indicate the road layout
	a through route through	723	2. The route arm, other than the curved route arm shown in the diagram, may be of any appropriate length and may be curved
	a town or village that has	1	3. The gap within the curved route may be varied to accommodate the associated legend, including any panel and any symbol
	been by- passed (name of by-		4. The width of the straight route arm shown in the diagram, may be varied provided that the arm is 6 stroke widths if indicating a primary route and 4 or 2.5 stroke widths if indicating a non-primary route
	passed town or village is		5. A gap may be provided within a route arm in order to accommodate a symbol shown in a diagram in column 3 of the sign table in Part 20
	placed in the gap		6. The symbol must be—
	within the curved		(a) white, when appearing on an appropriate background provided for at item 1, 2, 5 or 7 of the sign table in Part 2; and
	route arm)		(b) red, when appearing on an appropriate background provided for at item 6 of the sign table in Part 2
6	Route symbol where no	2.5 =	1. The position and direction of the short square- ended route symbol may be varied and may be of any appropriate length
	destination is shown	4	2. The width of the route symbols may be varied provided that the symbol is 6 stroke widths if indicating a motorway or primary route and 4 or 2.5 stroke widths if indicating a non-primary route
			3. The end of the short square-ended route symbol may be curved to accommodate a symbol shown in column 3 of the sign table in Part 20 of Schedule 11 at item 19, 21, 22, 23, 36, 37, 38, 39, 40, 41, 42 or 43
			4. The symbol must be—
			(a) white, when appearing on an appropriate background provided for at item 1, 2, 5 or 7 of the sign table in Part 2; and

(1,	(2)	(3)	(4)
Ite	mDescription	nRoute symbol	Variants
	1	,	(b) red, when appearing on an appropriate background provided for at item 6 of the sign table in Part 2.
7	No- through road symbol incorporate in diagram A of items 1, 2, 5 and 7 of the sign table in Part 2	= 2.5	 The no-through road symbol, with the red bar and white border, together with the narrow route arm may be applied to any route symbol with the width of the 6 stroke width route arm being varied as appropriate The background colour on which the symbol is placed must be blue on the sign provided for at item 1 of the sign table in Part 2, brown on the sign provided for at item 5 of the same table, and black on the sign provided for at item 7 of that table The direction of the narrow route arm may varied and lengthened as necessary; the red no-through road symbol must always be perpendicular to the narrow route arm
8	No- through road symbol incorporate in diagram A in respect of items 3, 4 and 6 of the sign table in Part 2	= 2.5	 The no-through road symbol, with the red bar, together with the narrow route arm may be applied to any route symbol with the width of the 4 stroke width arm being varied as appropriate. The route symbol must be red when incorporated in the sign provided for at item 6 of the sign table in Part 2 The direction of the narrow route arm may varied and lengthened as necessary; the red no-through road symbol must always be perpendicular to the narrow route arm
9	Route symbol indicating a grade separated junction where the number of lanes remain the same through the junction	5/5	 The length, direction, position and shape of the exit route arm may be varied, but must always indicate an exit to the left The forward route arm need not be associated with a destination, but where a destination is shown it must be extended upwards and where no destination is shown, the top of the forward route arm must generally be level with the top of the exit route arm except where the direction and shape of the exit route arm precludes this A second route arm indicating an exit to the left may be added where there are two exits at the junction A gap may be provided within a route arm in order to accommodate a symbol shown in a diagram in column 3 of the sign table in Part 20

(1)	(2)	(3)	(4)
Ite	mDescriptio	onRoute symbol	Variants 5. The symbol must be—
			(a) white, when appearing on an appropriate background provided for at item 1, 2, 5 or 7 of the sign table in Part 2; and
			(b) red, when appearing on an appropriate background provided for at item 6 of the sign table in Part 2
	Route symbol	5 	1. The number and direction of the exit route arms may be varied
	indicating a roundabou		2. The shape, but not the width, of the roundabout mbol may be varied
	approached from an	4	3. Route arms may be of any appropriate length and may be curved
	exit slip road at a grade separated junction	5	4. The width of any exit route arm, excluding the square-ended route symbol, may be varied provided that the arm is 6 stroke widths if indicating a motorway or primary route and 4 or 2.5 stroke widths if indicating a non-primary route
			5. A gap may be provided within a route arm in order to accommodate a symbol shown in a diagram in column 3 of the table in Part 20
			6. The symbol must be—
			(a) white, when appearing on an appropriate background provided for at item 1, 2, 5 or 7 of the table in Part 2; and
			(b) red, when appearing on an appropriate background provided for at item 6 of the table in Part 2
	Route symbol	5	1. The number and direction of the exit route arms may be varied
	indicating a partial roundabou	5	2. The shape, but not the width, of the roundabout symbol may be varied
	approached from an	4=	3. Route arms may be of any appropriate length and may be curved
	exit slip road at a grade separated junction	 5	4. The width of any exit route arm, excluding the square-ended route symbol and the 5 stroke width exit arm, may be varied provided that the arm is 6 stroke widths if indicating a motorway or primary route and 4 or 2.5 stroke widths if indicating a non-primary route
			5. A gap may be provided within a route arm in order to accommodate a symbol shown in a diagram in column 3 of the sign table in Part 20

(1) (2) (3)	(4)
ItemDescriptionRoute symbol	Variants
	6. The symbol must be—
	(a) white, when appearing on an appropriate background provided for at item 1, 2, 5 or 7 of the sign table in Part 2; and
	(b) red, when appearing on an appropriate background provided for at item 6 of the sign table in Part 2

Provisions applicable to Part 9

- 1. Information of a description in column 2 of an item in the sign table in Part 9 must be conveyed on a directional sign by a destination panel which is of the colour and type, and complies with the requirements as to size, shown in the diagram in column 3, or that diagram as varied in accordance with column 5
- **2.** Subject to paragraph 3, the appropriate backgrounds on which a destination panel may be placed are—
 - (a) in the case of item 4—
 - (i) a diagram A background provided for at item 1, 2 or 3 of the sign table in Part 2; or
 - (ii) a diagram B background provided for at item 2 or 3 of that table; and
 - (b) in the case of each of the other items, a diagram A plate provided for in the sign table in Part 2 at the item number of that table specified in column 4 of the table in Part 9.
- **3.** A diagram A background at item 1 of the sign table in Part 2 is not an appropriate background plate for an item in the sign table in Part 9 unless the plate is placed on an exit slip road or indicates the termination of a motorway.
 - **4.** A white border must be added around the destination panel shown by the diagram—
 - (a) for item 1, 7 or 8, where it appears on an appropriate background provided for at item 2 of the sign table in Part 2;
 - (b) for item 2, where it appears on an appropriate background provided for at item 1 of the sign table in Part 2;
 - (c) for item 4, 5 or 6, where it appears on an appropriate background provided for at item 1 or 2 of that table.
- **5.**—(1) This paragraph applies to a legend on a destination panel provided for at item 2, 3 or 4 of the sign table in Part 9 where the legend is the name of a place that is a city, town, village or tourist destination.
- (2) On a sign placed in Scotland, the name of the place may be written in Scottish Gaelic, in addition to English, provided the Scottish Gaelic version is shown above the English.
- (3) Where the name is the same in English and Scottish Gaelic, it may be written only once on the sign in a manner which complies with the requirements of these Regulations applicable to a name written in—
 - (a) English; or

- (b) Scottish Gaelic.
- **6.** The sizes in the diagram are stroke widths.

 $\begin{array}{c} PART\ 9 \\ \\ Destination\ panels\ that\ may\ appear\ on\ plates\ in\ Part\ 2 \end{array}$

Sign table — Schedule 12, Part 9

(1) (2)(3) (5) (4) **Variants** *ItemDescriptionDestination panels* Item number in Part 2 sign table Destination 1. Destinations, motorway number and junction Birmingham panel number may be varied in accordance with any appropriate entry in column 3 of the sign table Stoke indicating route 17 M 6 in Part 3 8 leading directly 2. A motorway number indicating another onto motorway to which the motorway leads may be motorway added provided that the number is in brackets showing 3. The junction number patch may be omitted the junction number 4. Where space permits, a rectangular recess on a black may be provided in one of the corners of the patch panel to accommodate an exit route arm shown by a diagram in column 3 of the sign table in Part 7 5. The panel may incorporate any symbol shown by a diagram in column 3 of the sign table in Part 11 at item 6 or 13 of the table as appropriate 1. The legend may be varied in accordance Destination 1, 3 Lampton with any appropriate entry in column 3 of the panel sign table in Part 3 indicating route leading 2. The route number may be positioned alongside and to right of the destination directly onto or below and on the right hand side of the primary destination route 3. The panel may incorporate any symbol shown by a diagram in column 3 of the sign table in Part 11 at items 6 to 23

(1)	(2)	(3)	(4)	(5)
Ite	mDescriptio	nDestination panels	Item number in Part 2 sign table	Variants
				4. Where the panel incorporates one or more symbol shown by a diagram in Part 5, the symbols shown in the diagrams in Part 20 may be added to the panel as appropriate
				5. Where space permits, a rectangular recess may be provided in one of the corners of the panel to accommodate an exit route arm shown by a diagram in column 3 of the sign table in Part 7
3	Destination panel indicating a route	Endsbury B1077	1,2	1. The legend may be varied in accordance with any appropriate entry in column 3 of the sign table in Part 3
	leading directly onto a			2. The route number may positioned alongside and to right of the destination or below and on the right hand side of the destination
	non- primary route (shown on a primary route			3. The panel may incorporate any symbol shown by a diagram in column 3 of the sign table in Part 11 at items 6 to 23 of the table as appropriate
	sign)			4. Where a panel incorporates one or more symbols shown by a diagram in column 3 in the sign table in Part 5, any of the symbols shown by a diagram in column 3 in the sign table in Part 20 may be added to the panel as appropriate
				5. Where space permits, a rectangular recess may be provided in one of the corners of the panel to accommodate an exit route arm shown by a diagram in column 3 of the sign table in Part 7
4	Panel indicating tourist destination or leisure	4≡ Archer L Castle L	14	1. The symbol may be varied to any symbol shown in a diagram in Parts 14 to 18 and the name of the attraction or facility may be varied and may include the legends shown in the Part 3 sign table at item 3
	facility			2. Either the symbol or the name may be omitted

(1)	(2)	(3)	(4)	(5)
Ite	mDescriptio	nDestination panels	Item number in Part 2 sign table	Variants
				3. The direction in which the symbol faces and the relative positions of the symbol and name may be reversed as appropriate and the symbol may be placed centrally below the name
				4. The distance to the tourist destination or leisure facility may be shown in accordance with the entries 1 and 2 in column 3 at item 5 of the Part 3 sign table
				5. More than one tourist destination or leisure facility may be shown
				6. A phrase relating to the route to be followed may be shown in accordance with the entries in column 2 and 3 in the sign table in Part 3 at item 2, may be added
				7. The symbols shown in the diagram in column 3 of the sign table in Part 11 at item 25 or 26 may be added
				8. Where space permits, a rectangular recess may be provided in one of the corners of the panel to accommodate an exit route arm shown by a diagram in column 3 of the Part 7 sign table
				9. Where a panel incorporates one or more symbols shown by a diagram in column 3 in the Part 5 sign table, any of the symbols shown by a diagram in column 3 in the Part 20 sign table may be added to the panel as appropriate
5	Panel indicating a route recommend for goods	Northway Industrial Est		1. The name of the destination may be omitted of varied in accordance with the entry in column 3 of the sign table in Part 3 at item 1 and more than one destination may be shown
	vehicles			2. The distance to the named destination may be shown in accordance with column 3 of the sign table in Part 3 at item 5
				3. A phrase relating to the route to be followed, as detailed in column 3 of the sign table in Part 3 at item 2, may be added

(1)	(2)	(3)	(4)	(5)
Ite.	mDescriptio	nDestination panels	Item number in Part 2 sign table	Variants
				4. Identification numbers of routes to which the recommended route leads may be added in accordance with column 3 of the sign table in Part 3 at item 4; route numbers for non-primary routes must be in white characters on the black background
				5. The lorry symbol may be reversed
				6. The lorry symbol may be placed alongside of the named destination
				7. The panel may be varied to the word "Truckstop" or a geographical name and "truckstop", with or without the lorry symbol
				8. Where space permits, a rectangular recess may be provided in one of the corners of the panel to accommodate an exit route arm shown by a diagram in column 3 of the sign table in Part 7
6	Panel indicating a route to a Ministry of	St George's Barracks	1, 2, 3	1. The destination may be varied in accordance with the entry in column 3 of the sign table in Part 3 at item 1 and more than one destination may be shown
	Defence establishme	ent		2. The distance to the destination may be shown in accordance with column 3 of the sign table in Part 3 at item 5
				3. Where space permits, a rectangular recess may be provided in one of the corners of the panel to accommodate an exit route arm shown by a diagram in column 3 of the sign table in Part 7
7	Panel indicating a route recommend for pedal	Melborou town cent	2.3 gh = tre 8.4	1. The destination may be varied in accordance with the entry in column 3 of the sign table in Part 3 at item 1 and more than one destination may be shown
	cyclists, together with			2. A symbol in column 3 of the sign table in Part 11 representing a destination may be added

(1)	(2)	(3)	(4)	(5)
Ite	mDescriptio	nDestination panels	Item number in Part 2 sign table	Variants
	a national cycle route number			3. The distance to the destination may be shown in accordance with column 3 of the sign table in Part 3 at item 5 4. The cycle route number may be varied in
				accordance with column 3 of the sign table in Part 11 at item 3, or omitted
				5. The cycle symbol may be reversed and placed to the right of any cycle route number
				6. The cycle symbol and route number may be placed alongside the destination
				7. Where space permits, a rectangular recess may be provided in one of the corners of the panel to accommodate an exit route arm shown by a diagram in column 3 of the sign table in Part 7
8	Panel indicating a route to a	Services = 4	2, 3	"Services" may be varied to a geographical name and "services" "Services" may be varied to "Rest area" or a
	motorway service			geographical name and "rest area"
	area, access to which is reached from a			3. Where space permits, a rectangular recess may be provided in one of the corners of the panel to accommodate an exit route arm shown by a diagram in column 3 of the sign table in Part 7
	primary or non- primary route			
9	Panel indicating a route to	Services	2, 3	1. "Services" may be varied to a geographical name and "services"
	services on a primary or non- primary route			2. Where space permits, a rectangular recess may be provided in one of the corners of the panel to accommodate an exit route arm shown by a diagram in column 3 of the sign table in Part 7

(1)	(2)	(3)	(4)	(5)
Ite	mDescriptio	nDestination panels	Item number in Part 2 sign table	Variants
	(Shown on a primary route sign)			3. If the legend appears on the background shown by diagram A at item 3 of the sign table in Part 2 the white panel must be omitted

Provisions applying to Parts 11 and 12

- 1. Information or a restriction of a description in column 2 of an item in the sign table in Part 11 must be conveyed by the inclusion of the symbol of the size, colour and type shown in the diagram in column 3, or that diagram as varied in accordance with column 5, on a directional sign with an appropriate background.
- **2.** In the case of items 10 and 36, the reference in paragraph 1 to a symbol shown in the diagram is to the description of the symbol in column 3, or, in the case of item 10, that description as varied in accordance with column 5.
- **3.** In the case of item 24, the description in column 2 is supplemented by the description in (a) to (d) in column 3.
- **4.** A sign which contains a symbol provided for at item 25 or 26 of the Part 11 sign table may additionally include a legend provided for at an item number in the sign table in Part 12.
- **5.**—(1) An appropriate background for a symbol provided for in the Part 11 sign table is one referred to in column 4 of the sign table in Part 11 by reference to an item number in the sign table in Part 2.
- (2) Unless otherwise stated at the entry in column 4, the reference to an appropriate background is to both backgrounds A and B at the item number in question in the Part 2 sign table.
- **6.** An appropriate background of the type provided for at item 4 of the Part 2 sign table must always incorporate at least one of the following symbols shown in the Part 11 sign table—
 - (a) a "Park and Ride" symbol provided for at item 24;
 - (b) the parking place symbol at item 25;
 - (c) a parking place symbol at item 26.
- 7. An appropriate background of the type provided for at item 7 of the Part 2 sign table must always incorporate the white lorry symbol at item 2 of the Part 11 sign table.
- **8.** An appropriate background of the type provided for at item 8 of the Part 2 sign table must always incorporate the white cycle symbol at item 3 of the Part 11 sign table.
 - **9.** The sizes in the diagram are stroke widths.

PART 11
General symbols that may be appear on plates in Part 2

Sign table — Schedule 12, Part 11

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Symbol	Part 2 sign table item number	Variants
1	Route leading directly to a motorway	16	1	
	(for use on signs indicating a motorway entry slip road)			
2	Route for goods vehicles	12 0 0	7	The symbol may be reversed
3	Route for pedal cycles with an indication of a national cycle route number (Alternative	10 or 8.4 4 6	8.4	1. The cycle route numbers may be varied and may include capital letters and, where indicating another route to which the route leads, shown in brackets, or omitted. Additional route numbers in separate patches may be shown alongside the route number patch
	types)			2. The background colour of the route number patch must be varied to blue when the route forms part of a regional cycle route network
				3. When indicating a route other than a national or regional cycle route network, the route number and background of the route number patch may be in any contrasting colours. Where the route number patch has a light background the white edge to the patch must be omitted
				4. The background may be varied to brown when the symbol is incorporated in a sign which shows only tourist destinations and leisure facilities

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Symbol	Part 2 sign table item number	Variants
4	Route for pedestrians	14	8, 9	1. The symbol may be reversed 2. The background may be varied to brown when the symbol is incorporated in a sign provided for at item 8 of the sign table in Part 2 and which shows only tourist destinations and leisure facilities 3. The background and symbol may be of any contrasting colours when incorporated in the sign provided for at item 9 of the sign table in Part 2
5	Route for ridden horses (bridleway) with an indication of a route number	17.5 H2	8,9 25 8.4	1. The route numbers may be varied and, where indicating another route to which the route leads, shown in brackets, or omitted. Additional route numbers in separate patches may be shown alongside the route number patch
	(Alternative types)	8.4 H25	17.5	2. The route number and background of the route number patch may be in any contrasting colours. Where the route number patch has a light background the white edge to the patch must be omitted
				3. The background must be varied to blue or brown when the symbol is incorporated in a sign provided for at item 8 of the sign table in Part 2
				4. The background and symbol may be of any contrasting colours when incorporated in the sign provided for at item 9 of the sign table in Part 2
6	Airport	<u>↑</u> 10	1 to 3	1. The direction in which the symbol points may be varied, but it must not point downwards
				2. The symbol must be white when placed on a part of a sign having a blue or dark green background
7	National railway station	10	Diagram A plate:	A white border may be added around the symbol to ensure adequate contrast between the symbol and the background of the sign

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Symbol	Part 2 sign table item number 1 to 5, 8, 9 Diagram B plate: 2 to 5, 8, 9	Variants
8	London Underground railway station	→ 10	2 to 5, 8, 9	The symbol may be placed on a white rectangular patch to ensure adequate contrast between the symbol and the background of the sign
9	London bus stop or bus station	10	2 to 5, 8, 9	1. A bus stop code in white characters on a red circle may be shown with the symbol 2. The symbol may be placed on a white rectangular patch and a white border added around the red circle of any bus stop code to ensure adequate contrast between the symbol and bus stop code and the background of the sign
10	(a) A symbol or logo representing a stopping place for tramcars or vehicles forming part of a light railway transit system, or boarding place for river services, each being operated by or on behalf of, or under agreement with, Transport for London	May be of any appropriate design and colour with a height of 10 stroke widths	2 to 5, 8, 9	The symbol may be placed on a white rectangular patch, or a white border added, to ensure adequate contrast between the symbol and the background of the sign

(1)	(2)	(3)	(4)	(5)
Ite.	mDescription	Symbol	Part 2 sign table item number	Variants
	(b) A symbol representing public transport services outside London operated by or on behalf of a Passenger Transport Executive or traffic authority			
11	Vehicular ferry		Diagram A plate: 1 to 5, 8, 9 Diagram B plate: 2 to 5, 8, 9	cars or two lorries and may be reversed in a mirror image 2. The symbol may be white with black vehicles to ensure adequate contrast
12	Pedestrian ferry	Pedestrian ferry	Diagram A plate: 1 to 5, 8, 9 Diagram B plate: 2 to 5, 8, 9	The symbol may be white with black legend to ensure adequate contrast between the symbol and the background of the sign

(1)	(2)	(3)	(4)	(5)
Ite.	mDescription	Symbol	Part 2 sign table item number	Variants
13	Indication of a diversionary route	7.5 5.5	1 to 3	
	(Alternative types)	7.5 5.5	O	
		7.5 5.5	Δ	
		7.5		
		7.5 5.5		
14	Recycling centre	12	2 to 4, 8,	The symbol may be placed on a white rectangular patch to ensure adequate contrast between the symbol and the background of the sign
15	Public toilets	WC 14	2 to 5, 8,	1. The symbol may be white to ensure adequate contrast between the symbol and the background of the sign
				2. The symbol background must be the same colour as that part of the sign on which it is placed
				3. The legend "Ladies" or "Gents" may be added
16	Facilities for disabled	<u>ال</u> م	2 to 5, 8,	1. The symbol may be reversed
	persons			2. The black patch must be omitted when the symbol is placed on a dark background, in which case the size of the wheelchair symbol must be increased proportionally to a height of 14 stroke widths
17	Shopmobility	14	2 to 5, 8,	1. The word "Shopmobility" must always be used in combination with the symbol
				2. The symbol may be reversed

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Symbol	Part 2 sign table item number	Variants 3. The black patch must be omitted when
				the symbol is placed on a dark background, in which case the size of the wheelchair and basket symbol must be increased proportionally to a height of 14 stroke widths
18	Public telephone	20	2 to 5, 8, 9	 The symbol may be reversed The symbol may be white to ensure adequate contrast between the symbol and the background of the sign The legend "Payphone" or "Cardphone" may be added
19	Road charging zone	16	2, 3	If the symbol is placed on a dark green background part of a sign a white border must be added around the symbol
20	Police station	12	2 to 4, 8,	A white border may be added around the symbol to ensure adequate contrast between the symbol and the background of the sign
21	Hospital with accident and emergency facilities	H 14	Diagram A plate:	1. The "A & E" plate in each case may be placed to the right of the "H" symbol
	(Alternative types)	Or 14 A & E not 24 hrs	8, 9	2. A white border may be added to the inside edge of the red "H" patch, with the letter "H" remaining the same size, and to the outside of the "A & E" plates to ensure adequate contrast between the symbol and the background of the sign
22	Hospital with no accident and emergency facilities	No A & E	2 to 4, 8, 9	1. The "No A & E" plate may be placed to the right of the "H" symbol 2. A white border may be added to the inside edge of the blue "H" patch, with the letter "H" remaining the same size, and to the outside of the "No A & E" plate to ensure adequate contrast between the symbol and the background of the sign

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Symbol	Part 2 sign table item number	Variants
23	Hospital with facilities for treating minor injuries (Alternative types)	Minor injury unit or H 14 Minor injury unit not 24 hrs	2 to 4, 8, 9	1. The "Minor injury unit" plate in each case may be placed to the right of the "H" symbol or shown on its own 2. A white border may be added to the inside edge of the red "H" patch, with the letter "H" remaining the same size, and to the outside of the "Minor injury unit" plates to ensure adequate contrast between the symbol and the background of the sign
24	Park and Ride scheme providing onward travel by public transport (Alternative types)	or P+	y tramcal y nationa	1. The symbol depicting the type of onward travel may be varied to the symbol described in item 10 of this table 2. The symbol must always be used with the legend "Park and Ride" or "Park & Ride"; an additional legend may be added in any combination to indicate the location of the "Park and Ride" site and a time period relating to the days and hours of operation; "Free" may be added 3. The symbol and associated legend may be shown on a white panel to ensure adequate contrast between the symbol and the background of the sign
25	Parking place	P 14	2 to 5, 8,	1. The symbol and associated legend may be shown on a white panel to ensure adequate contrast between the symbol and the background of the sign

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Symbol	Part 2 sign table item number	2. Where the symbol is shown by itself a white border may be added to the inside
				edge of the blue patch, with the letter "P" remaining the same size, to ensure adequate contrast between the symbol and the background of the sign
26	Secure parking place approved by the police under the	14 PARK MARK	2 to 5, 8,	1. The symbol and associated legend may be shown on a white panel to ensure adequate contrast between the symbol and the background of the sign
	Park Mark safer parking scheme (Alternative types)	14 P PARI	K K	2. Where the symbol is shown by itself a white border may be added to the inside edge of the blue "P" patch, with the letter "P" remaining the same size, and to the outside of the "Park Mark" plate to ensure adequate contrast between the symbol and the background of the sign
27	Parking place for solo motor cycles (for use only in combination with the parking place symbol at item 24 or 25)	12	2 to 5, 8, 9	1. The symbol may be reversed 2. The size of the motor cycle symbol may be varied proportionally when used in combination with a symbol shown at item 28, 29, 30, 31 or 32
28	Parking place for motor cars (for use only in combination with the parking place symbol at item 24 or 25)	12	2 to 5, 8, 9	1. The symbol may be reversed 2. The size of the symbol may be varied proportionally when used in combination with a symbol shown at item 27, 30, 31 or 32
29	Parking place for motorised caravans or caravans drawn by motor vehicles	14	2 to 5, 8,	1. The symbol may be reversed 2. The size of the symbol may be varied proportionally when used in combination with a symbol shown at items 27, 30, 31 and 32

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Symbol	Part 2 sign table item number	Variants
	(for use only in combination with the parking place symbol shown in item 24 or 25)			
30	Parking place for buses (Alternative types) (for use only in combination with the parking place	or 1	2 to 5, 8, 39	1. The size of the symbol may be varie proportionally when used in combinatio with a symbol shown at items 27, 28, 29, 3 and 32
21	symbol shown in item 24 or 25)		2.50	
31	Parking place for goods vehicles (for use only in combination with the parking place symbol shown in item 24 or 25)	12	2 to 5, 8,	1. The symbol may be reversed 2. The size of the symbol may be varied proportionally when used in combination with a symbol shown at items 27, 28, 29, 30 and 32
32	Parking place for pedal cycles (for use only in combination with the parking place symbol shown in item 24 or 25)		2 to 5, 8, 9	1. The symbol may be reversed 2. The size of the symbol may be varied proportionally when used in combination with a symbol shown at items 27, 28, 29, 30 and 31

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Symbol	Part 2 sign table item number	Variants
33	Parking place with information point	14	2 to 5, 8,	
	(for use only in combination with the parking place symbol shown in item 24 or 25)			
34	Parking place with facilities for recharging electric vehicles (for use only in combination with the parking place symbol shown in item 24 or 25)	14	2 to 5, 8, 9	
35	Parking place for pedal cycles	14 P 550	8 10	The cycle symbol may be reversed provided that it remains to the right of the "P" symbol
36	A logo or pictorial representation of a local landmark or historical feature	- C	9	

Legends for the parking symbols shown in items 25 and 26 of Part 11

Sign table — Schedule 12, Part 12

(1)	(2)	(1)) (2)
Ite	mLegend	Ite	emLegend
1	The following may be used in any appropriate combination— (a) Name or location of the parking place (b) "Free" or "Pay and Display" (c) "Shoppers" or "Commuters" (d) "Long stay" or "Short stay" (e) "Multi-storey"	2	The total number of spaces in the parking place may be indicated on the "P" symbol at item 25 or 26 as shown below, with the numerals varied as appropriate— or Page 1200
3	(f) A time period The following may be displayed as variable legends in red or green characters on the white background of the sign— (a) "FULL"; (b) "CLOSED" (c) "SPACES"	4	The following, in any appropriate style, may be displayed as variable legends in white or yellow characters on a black background— (a) "FULL" (b) "CLOSED" (c) "SPACES" (d) The number of available spaces at any one time

PART 13

Provisions applying to Parts 14 to 18

- 1.—(1) The location of a tourist destination or leisure facility of a kind described in column 2 of an item in the sign tables in Parts 14 to 18 must be conveyed by the inclusion on a directional sign against an appropriate background of a symbol of the size, colour and type shown in—
 - (a) the diagram in column 3 of the item; or
 - (b) that diagram varied in accordance with column 4.
- (2) A symbol provided for in the sign tables in Parts 14 to 18 may be used with, or instead of, a legend giving the name, or a generic description, of the destination or facility as provided for in Part 3.

- 2. The signs in Part 14 are to be used for destinations or facilities in England, Scotland or Wales.
- **3.** The signs in Part 15 are to be used for destinations or facilities in England or Wales.
- **4.** The signs in Part 16 are to be used for destinations or facilities in England.
- **5.** The signs in Part 17 are to be used for destinations or facilities in Scotland.
- **6.** The signs in Part 18 are to be used for destinations or facilities in Wales.
- 7. An appropriate background for an item in a table in Parts 14 to 18 is—
 - (a) a diagram A or a diagram B background provided for at item 5, 8 or 9 of the sign table in Part 2; or
 - (b) a panel provided for at item 4 of the sign table in Part 9.
- 8. Where the background of the sign is not brown—
 - (a) the brown colour shown as part of the diagram for a symbol in column 3 of a sign table in Parts 14 to 18 must be varied to the background colour used; and
 - (b) the colour of the symbol may be varied to black to provide a contrast with the background.
- **9.** The sizes in the diagram are stroke widths.

Symbols indicating types of tourist destinations and leisure facilities in England, Scotland or Wales

(1)	(2)	(3)	(4)	(1)	(2)	(3)	(4)
Ite	n Descriptio	nSymbol	Variants	Iter	n Descriptio	n Symbol	Permitted variants
1	T 1 Tourist Information Centre or Point	14		2.	T 2 Castle of historic or architectura interest	14	-
3	House of historic or architectura interest	14		4	T 4 Picnic area (Leisure facility)	14	
5	T 5 Youth Hostel	AA	14	6.	T 6 Caravan site which has at least 20		14

(1)	(2)	(3)	(4)	(1)	(2)	(3)	(4)
Ite	n Descriptio	n Symbol	Variants	Iter	n Descriptio	n Symbol	Permitted variants
	(Leisure facility)				pitches for casual overnight use		
					(where the site is both a caravan and a camping site, the reference to the number of pitches includes both pitches for caravans and for tents) (Leisure facility)		
7	T 7 Camping site which has at least 20 pitches for casual overnight use (where the site is both a caravan and a camping site, the reference to the number of pitches includes			8.	T 8 Woodland recreation area (Leisure facility)		4

(1)	(2)	(3)	(4)	(1)	(2)	(3)	(4)
Itei	n Descriptio	nSymbol	Variants	Itei	n Descriptic	on Symbol	Permitted variants
	both pitches for caravans and for tents) (Leisure facility)						
9	T 9 Viewpoint (Leisure facility)	14	The symbol may be reversed	10.	T 10 Light refreshmen facilities (Leisure facility)	7.25	
11	T 11 Restaurant (Leisure facility)	12	-	12.	T 12 Hotel or other overnight accommod (Leisure facility)	ation	The—symbol may14 be reversed

Symbols indicating types of tourist destinations and leisure facilities in England or Wales

(1)	(2)	(3)	(4)	(1)	(2)	(3)		(4)
Ite	m Descriptio	nSymbol	Permitted variants	l Ite	m Descriptio	n Symbol		Permitted variants
1	T 101 National Trust(3) property		14	2	T 102 Flower garden or	***	14	The symbol may be reversed

⁽³⁾ Registered as a charity in England and Wales (number: 205846).

(1)	(2)	(3)	(4)	(1)	(2)	(3)	(4)
Itei	n Descriptio	nSymbol	Permitted variants	Itei	n Description	•	Permitted variants
					horticultura exhibition		
3	T 103 Preserved railway, tourist railway or railway museum		The symbol may be reversed	4	T 104 Water sport activities (Leisure facility)	14	The symbol may be reversed
5	T105 Church of historic or architectura interest	14 14		6	Cathedral of historic or architectura interest	14	
7	T107 Wildlife park	14		8	Windmill of historic or architectura interest	14	
9	T109 Zoo	S 12	The symbol may be reversed	10	T110 Agricultural museum	$\bigcirc \otimes \otimes$	The— symbol may be reversed
11	T111 Equestrian centre	14		12	Country park (Leisure facility)		3
13	T113 Bird garden	14	The symbol may be reversed	14	T114 Pleasure or theme park	土 土	Both-trees may be of the same type, and either or both trees may be omitted

(1)	(2)	(3)	(4)	(1)	(2)	(3)	(4)
Itei	n Descriptio	nSymbol	Permittea variants	! Itei	n Description	n Symbol	Permitted variants
15	T 115 Nature reserve	11	The symbol may be reversed	16	T 116 Historic dockyard or attraction of maritime interest	14	The symbol may be reversed
17	T 117 Air museum	14		18	T118 Beach (Leisure facility)	14 Table 14	
19	T119 Farm park	12	The symbol may be reversed	20	T 120 Pottery or craft centre	14	
21	T121 Prehistoric site or monument	14		22	T122 Butterfly farm	1	1
23	T123 Canalside attraction		The symbol 8 may be reversed	24	T124 Industrial heritage museum or attraction	14	
25	T125 Watermill of historic or architectura interest	14		26	T126 Aquarium or oceanarium	11	The symbol may be reversed
27	T 127 Site with Roman remains	14	The symbol may be reversed	28	T 128 Heavy horse centre	12	The symbol may be reversed

(1)	(2)	(3)	(4)	(1)	(2)	(3)	(4)
Iten	n Descriptio	nSymbol	Permitted variants	Itei	n Description	ı Symbol	Permitted variants
29	T 129 Motor museum		The symbol may be reversed	30	T 130 Craft centre or forge	9	The symbol may be reversed
31	T 131 Spa, spring or fountain of particular interest	14		32	T 132 Farm trail	14	
33	T 133 Vineyard	15		34	T 134 Golf course (Leisure facility)	14	The symbol may be reversed
35	T 135 Race course (Leisure facility)	** 1	The symbol 4may be reversed	36	T 136 Motor sport (Leisure facility)	14	
37	T137 Cricket ground (Leisure facility)	14		38	T138 Football ground (Leisure facility)	14	
39	T139 Canoeing		The symbol 4may be reversed	40	T140 Fishing	14	The symbol may be reversed
41	T141 Boat hire		The symbol may be reversed	42	T142 Cycle hire	13	The symbol may be reversed

(1)	(2)	(3)	(4)	(1)	(2)	(3)	(4)
Itei	n Descriptio	nSymbol	Permitted variants	Ite	n Description	n Symbol	Permitted variants
43	T 143 Woodland walk in a coniferous forest (Leisure facility)	14	The symbol may be reversed	44	Woodland walk in a deciduous or mixed forest (Leisure facility)	14	The symbol may be reversed
45	T 145 Outdoor pursuits centre	14	The symbol may be reversed	46	T146 Roller skating	14	The symbol may be reversed
47	T147 Ice skating	14	The symbol may be reversed	48	T148 Ski slope	14	The symbol may be reversed
49	T 149 Ten pin bowling	14		50	T 150 Birds of prey centre		The symbol may be reversed
51	A bird reserve under the control of the Royal Society for the Protection of Birds(4)	rspb 14		52	Centre approved by the Rare Breeds Survival Trust(5)	11	
53	T 153 Safari park	M.W.	The symbol may be reversed	54	T154 Battlefield site	<u>20</u> 10	

 ⁽⁵⁾ Registered company (England and Wales) number 1204694; registered charity number (England and Wales) 269442.
 (4) Registered as a charity in England and Wales (number: 2076).


(1)	(2)	(3)	(4)	(1)	(2)	(3)	(4)
Itei	n Descriptic	nSymbol	Permitted variants	Itei	n Description	n Symbol	Permitted variants
55	T 155 Brass rubbing centre	14		56	T 156 Tower or folly of historic or architectura interest	14	
57	T 157 Historic building	14		58	T 158 Lighthouse open to the public	16	
59	T 159 Pier		The— symbol may be reversed	60	T 160 Swimming pool or indoor water sports centre (Leisure facility)	14	The symbol may be reversed
61	T161 Tram museum		The—symbol may be reversed	62	T162 Bus museum	هست	The symbol may be reversed
63	T163 Cinema (Leisure facility)		The symbol may be reversed	64	T164 Theatre or concert hall (Leisure facility)	14	
65	Brewing museum or exhibition	14		66	T 166 Cider farm or museum		2

(1)	(2)	(3)	(4)	((1)	(2)	(3)	(4)
Iter	n Descriptic	nSymbol	Permitted variants	Ī	Iten	n Description	n Symbol	Permitted variants
67	T 167 Rugby ground (Leisure facility)	14		6		T 168 Military museum		The symbol may be reversed
69	T169 Antiques centre	16						

PART 16
Symbols indicating types of tourist destinations and leisure facilities in England

(1)	(2) m Descriptio	(3) nSymbol	(4) Permitted	(1)	(2) n Descriptio	(3) nSymbol	(4) Permitted
	_		variants				variants
1	T 201			2	T 202	_	
	Tourist	13.4			Property	F 1 3 14	
	destination recognised				in the care of	- Luu	
	by the national				English Heritage(6)		
	promoter				Tiernage(0)		
	of tourism for						
	England						
3	T 203			4	T 204		
	Museum	14 MI	1		Sports	14	
	or art gallery				centre		
	8-11-4-3				(Leisure facility)		

⁽⁶⁾ Registered as a charity in England and Wales (number 1140351).

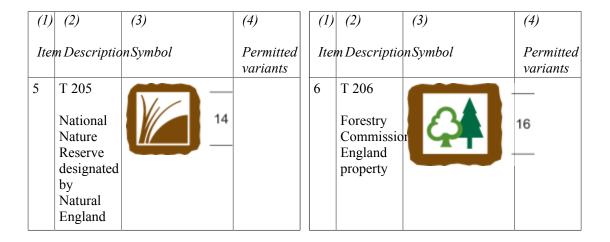

PART 17 Symbols indicating types of tourist destinations and leisure facilities in Scotland

(1)	(2)	(3)	(4)	((1)	(2)	(3)	(4)
Iter	n Descriptio	nSymbol	Permitted variants	1	Iter	n Descripti	onSymbol	Permitted variants
1	T 301.1 Tourist destination recognised by the national promoter of tourism for Scotland		The thistle symbol may be shown in white on a brown sign indicating a National Tourist Route	2		T 302 Property in the care of Historic Scotland(7)		The legend "Historic Scotland" may be added
3	T 303.1 National Trust for Scotland(8 property (incorporat symbol T 301.1)	The National Trust	The thistle symbol may be placed 24 to the left of the "National Trust for Scotland"	4		T 304.1 Forestry Commission Scotland property		16

⁽⁷⁾ Registered as a charity in Scotland (reference: SC045925).
(8) Registered as a charity in Scotland (reference: SC007410).
48

(1) (2) (3)	(4)	(1) (2) (3) (4)
Item DescriptionSymbol	Permitted variants	Item DescriptionSymbol Permitte variants
	symbol and legend	

PART 18
Symbols indicating types of tourist destinations and leisure facilities in Wales

(1)	(2)	(3)	(4)	(1)	(2)	(3)	(4)
Ite	mDescription	ı Symbol	Permitted variants	Itei	n Description	n Symbol	Permitted variants
1	T 401 Tourist destination recognised by the national promoter of tourism for Wales		The symbol may be reduced proportionally to a height of 12 stroke widths	2	T 402 Museum or art gallery		14
3	T 403.1 Property in the care of the Welsh Ministers and managed by that part of the Welsh Government responsible for Wales' historic environment			4	T 404 Sports centre (Leisure facility)	14	The symbol may be reversed

 $[\]textbf{(9)} \quad \text{The part of the Welsh Government currently with responsibility for Wales' historic environment is Cadw.}$

Provisions applying to Part 20

- 1. Information or a warning, requirement, restriction or prohibition specified in column 2 of an item in the sign table in Part 20 must be conveyed by a directional sign that includes a symbol provided for in column 3 on an appropriate background.
- **2.** A symbol must be of the colour and type and comply with the requirements as to size, provided for in the diagram in column 3 or that diagram as varied in accordance with column 4.
- **3.** The prohibition specified in column 2 at item 22 of the table must be conveyed by the inclusion of both the circular symbol and the symbol representing a plate and each must comply with paragraph 2.
- **4.** The prohibition specified in column 2 at item 33 of the table must be conveyed by the inclusion of both circular symbols and each must comply with paragraph 2.
 - 5. For the purpose of this Part and Part 20 an appropriate background is—
 - (a) that shown by either diagram A or diagram B at item 1 of the sign table in Part 2 where the sign is placed on an exit slip road or indicates the termination of a motorway;
 - (b) that shown by either diagram A or diagram B at item 2, 3, 4 or 5 of the sign table in Part 2;
 - (c) that shown by the diagram at item 2, 3 or 4 of the sign table in Part 9;
 - (d) that shown by the diagram at item 3, 5 or 6 of the sign table in Part 28.
- **6.** If two or more symbols from the sign table in Part 20 are included in a sign and there is any difference in the size of the symbols as provided for in the relevant diagrams, the size of all the symbols used on the sign must be that of the largest.
- 7. The symbol at item 22 must not be included on a sign with any other symbol provided for in the sign table in Part 20.
 - **8.** The dimensions in the diagrams in the sign table in Part 20 are in stroke widths.
- **9.** A symbol provided for in Part 20 may be varied when used on a directional sign by the addition of a white border around the symbol to ensure adequate contrast between the symbol and the background of the sign.
- **10.** A symbol provided for at item 20, 22, 23, 24 or 39 to 46 of the sign table in Part 20 may be used only on a sign which incorporates a route symbol shown by a diagram in the sign table in Part 7.

PART 20

Warning and regulatory symbols that may be incorporated on directional signs

(1)	(2)	(3)	(4)
Item	Description	Symbol	Variants
1	Warning of a steep hill downwards		The numerals may be varied

(1)	(2)	(3)	(4)
Item	Description	Symbol	Variants
2	Warning of a steep hill upwards	24	The numerals may be varied
3	Warning of a hump bridge	20	
4	Warning of an opening or swing bridge	20	
5	Warning of a tunnel	20	
6	Maximum headroom available at hazard (Metric and imperial units)	4.4 m 30 14 ⁶ 6″	The numerals may be varied
7	Warning of a zebra crossing	20	
8	Warning of a cattle grid	Cattle 30	
9	Worded warning symbol (Gate)		
10	Worded warning symbol (Gates)	Gates 24	
11	Worded warning symbol (Ford)	Ford 24	
12	Warning of a water course alongside road	20	The symbol may be reversed

(1)	(2)	(3)	(4)
Item	Description	Symbol	Variants
13	Warning of a road hump or series of road humps	20	
14	Warning of a level crossing with gate or barrier	20	
15	Warning of a railway level crossing without gate or barrier	20	
16	Warning of tramcars crossing	20	
17	Warning of an electrified overhead cable	20	
18	Warning of a cycle crossing	20	The symbol may be reversed
19	No right turn at all times	16	The symbol may be reversed
20	No U-turn at all times (only for use on the signs provided for at items 5 and 6 of the sign table in Part 28)	16	
21	No entry for vehicular traffic	16	
22	All vehicles prohibited except non-mechanically propelled vehicles pushed by pedestrians	16	1. The distance may be varied 2. The distance
		No vehicles 12 mile	may be omitted 3. "No vehicles" may be on two lines

(1)	(2)	(3)	(4)
Item	Description	Symbol	Variants 4. "No vehicles" may be varied to "Play Street" with or without a time period and "except for access" 5. When "No vehicles" is shown a time period may be added
			6. When "No vehicles" is shown, with or without a time period, the legend may include exceptions in accordance with paragraph 15 in Part 3 of Schedule 3
			7. The black border of the rectangular plate symbol may be omitted when the plate is placed on a blue, dark green or brown background part of the sign
23	Motor vehicles prohibited	20	The motor cycle symbol may be reversed
24	Goods vehicles exceeding the maximum gross weight indicated prohibited (Alternative types)	27.51 30 7.51 30	The numerals may be varied

(1)	(2)	(3)	(4)
Item	Description	Symbol	Variants
25	Vehicles exceeding the maximum gross weight indicated prohibited (Structural weight limit)	18t 24	"18t" may be varied to "3t", "7.5t", "10t", "13t", "26t" or "33t"
26	Vehicles carrying explosives prohibited	24	
27	Vehicles carrying dangerous goods with the classification code indicated by the sign prohibited from proceeding through a tunnel ahead	24 B 10	1. The classification letter "B" may be varied to "C", "D" or "E" 2. The black border of the rectangular plate may be omitted when the plate is placed on a dark background
28	Buses prohibited (Alternative types)	20 20	
29	Motor vehicles except solo motor cycles prohibited	20	
30	Towed caravans prohibited	20	The symbol may be reversed
31	Solo motor cycles prohibited	20	The symbol may be reversed
32	Horse-drawn vehicles prohibited	20	The symbol may be reversed

(1)	(2)	(3)	(4)
Item	Description	Symbol	Variants
33	Vehicles or combinations of vehicles exceeding the length indicated prohibited	32°6° 9,9 m	1. The numerals may be varied
	(Imperial and metric units)		2. The two lorry symbols may be reversed
34	Vehicles exceeding width indicated prohibited	2.0 m 6°6″ 30	The numerals may be varied
	(Metric and imperial units)	_	
35	Vehicles exceeding height indicated prohibited	4.4 m 14.6" 30	The numerals may be varied
	(Metric and imperial units)	_	
36	Route for use by buses, pedal cycles and taxis only (Alternative types)	taxi taxi 20	The cycle symbol, the word "taxi" or both may be omitted
		taxi taxi 20	
37	Route for use by buses, pedal cycles and solo motor cycles only	20	
	(Alternative types)		
		local 20	

(1)	(2)	(3)	(4)
Item	Description	Symbol	Variants
38	Route for use by buses, pedal cycles, solo motor cycles and taxis only (Alternative types)	taxi 24	
		coal local taxi	
39	Route for use by tramcars only	20	
40	Route for use by tramcars and buses only (Alternative types)	20	
		20	
41	Route for use by tramcars, buses and pedal cycles only (Alternative types)	24	
		24	

(1)	(2)	(3)	(4)
Item	Description	Symbol	Variants
42	Route for use by tramcars, buses, pedal cycles and taxis only (Alternative types)	্তি taxi কি taxi	
		taxi 🖟	
43	Route for use by tramcars, buses, pedal cycles, solo motor cycles and taxis only (Alternative types)	30 taxi	The word "taxi" may be omitted
		local 30 taxi	
44	Optional symbol representing a supplementary plate for use with symbols at items 1 to 43, indicating the distance to a hazard or prohibition	2 miles = 3.2	1. The distance may be varied 2. The black border must be omitted when the symbol is placed on a blue, dark green or brown background part of the sign.
45	Optional symbol representing a supplementary plate for use with circular symbols from this table (except items 23, 37 and 38), indicating conditions relating to a prohibition	buses = 3.2	1. The legend may be varied in accordance with paragraphs 8 and 15, or a combination of both, in Part 3 of Schedule 3 2. The legend may be varied

(1)	(2)	(3)	(4)
Item	Description	Symbol	Variants
			to "Except trams" when the symbol is used in combination with the symbol shown by the diagram at item 22
			3. The legend may be varied to "No explosives" or "No inflammables or explosives" when the symbol is used in combination with the symbol at item 27
			4. The legend may be varied to "and authorised vehicles" when the symbol is used in combination with a symbol at items 39 to 46
			5. The black border may be omitted when the symbol is placed on a blue, dark green or brown background part of the sign

Provisions applying to Part 22

- 1. Information of a description in column 2 of an item in the sign table in Part 22 must be conveyed by the sign shown by either diagram A or diagram B in column 3, including any appropriate symbol or legend that is required or permitted by virtue of column 4.
 - 2. A sign for conveying the description of information must be of—
 - (a) the colour and type shown in the diagram in column 3 of that table in respect of that item; and
 - (b) the size appropriate to accommodate a legend of a size specified in column 4 of the table in respect of the item.

PART 22
Sign background for signs indicating services

(1)	(2)	(3)	(4)
Ite	emDescription	Sign background	Legend height, requirements and variants
1	Sign indicating a motorway service area or motorway rest area where parking, toilets and, in the case of a service area, fuel and refreshments are available 24 hours a day throughout the year (Type A and B)	В	1. The x-height of the legend must be not less than 75 mm, nor more than 400 mm; 2. The legend "Services" must be included on the sign or it may be varied to "Rest area", or a geographical name and "services" or "rest area"; 3. Diagram A may incorporate an arrow as shown at item 1 of the sign table in Part 24 and where indicating the exit from a motorway the sign may also incorporate the number of the route to which the exit leads; 4. Diagram A may incorporate a distance in accordance with paragraph 7 of Part 3 of Schedule 18; 5. Diagram B may be reversed to point right; 6. Where diagram A does not incorporate an arrow, it may incorporate the symbols shown in column 3 of the sign table in Part 24 at items 2 to 11 except that no more than six symbols, excluding that at item 9, may be shown; 7. Diagram A may incorporate either a panel shown at item 14 or 15 of the sign table in Part 24, except that the panel shown at item 14 must not be incorporated where the sign incorporates a symbol shown at item 11 of that table

(1) (2	2)	(3)	(4)
Item _D	Description	Sign background	Legend height, requirements and variants
indicate in the second of the	gn dicating rvices on primary or on-primary ute, other an a otorway rvice area, here fuel, urking, freshments id toilets e available least etween 8 in and 8 in on every ay except irristmas ay, Boxing ay ad New	В	1. The x-height of the legend must be not less than 75 mm, nor more than 300 mm; 2. The legend "Services" must be included on the sign or it may be varied to a geographical name and "services"; 3. Diagram A may incorporate the arrows and symbols shown in Part 24 of this Schedule as appropriate except that no more than six symbols, excluding that at item 12 of the sign table in that Part, may be shown; 4. Diagram A may incorporate a distance in accordance with paragraph 7 of Part 3 of Schedule 18; 5. Diagram A may incorporate either a panel provided for at item 16 or 17 of the sign table in Part 24 of this Schedule; 6. Diagram B may be reversed to point right
(T B)	ear's Day Type A and gn		The reheight of the legend must be not less than 75 mm,
ine eit me tru wl	dicating ther a otorway uckstop here urking,	Α	nor more than 400 mm; 2. The legend "Truckstop" must be included on the sign or it may be varied to a geographical name and "truckstop"; 3. Diagram A may incorporate an arrow shown at item 1 of
to: to: fu- av ho thi the or	freshments, ilets and el are vailable 24 ours a day roughout e year, a non- otorway	в	the sign table in Part 24; 4. Where diagram A indicates a motorway truckstop and does not incorporate an arrow, the sign may incorporate the symbols shown at items 2 to 8 and 11 in the sign table in Part 24 except that no more than six of these symbols may be shown; 5. Where diagram A indicates a non-motorway truckstop
wl pa	ackstop here arking, freshments		it may incorporate the symbols shown at items 2 to 8 in column 3 of the sign table in Part 24 except that no more than six of these symbols may be shown;

(1)	(2)	(3)	(4)
Ite	mDescription	Sign background	Legend height, requirements and variants
	and toilets are available, and fuel may be available, at least between		6. Diagram A, when indicating a motorway truckstop, may incorporate a panel provided for at item 14 or 15 of the sign table in Part 24, except that the panel at item 14 must not be incorporated where the sign incorporates a symbol provided for at item 11 in that table;
	8 am and 8 pm on every day except Christmas		7. Diagram A when indicating a non-motorway truckstop, may incorporate a panel provided for at item 16 or 17 of the sign table in Part 24;
	Day, Boxing Day and New Year's Day		8. Diagram A may incorporate a distance in accordance with paragraph 7 of Part 3 of Schedule 18;
	(Type A and B)		9. Diagram B may be reversed to point right

Provisions applying to Part 24

- 1. Information of a description in column 2 of an item in the sign table in Part 24 must be conveyed on a sign provided for in the sign table in Part 22 by an arrow, symbol or panel (as the case may be) shown in the diagram in column 3 of the sign table in Part 24, or that diagram as varied or supplemented in accordance with column 5.
- **2.** An arrow, symbol or panel may only be placed on an appropriate diagram A sign (this is subject to paragraph 4).
- **3.** For the purposes of this Part, an appropriate diagram A sign is a sign shown in diagram A in column 2 of the sign table in Part 22 for an item of that table, the number of which is specified in column 4 of the sign table in Part 24.
- **4.** The truck symbol provided for at item 13 of the sign table in Part 24 may be placed on a sign shown in diagram B at item 3 of the sign table in Part 22.
- **5.** The symbol or panel shown by the diagram in column 3 of the sign table in Part 24 at item 9, 11, 14 or 15 may only be incorporated in an appropriate diagram A sign which is placed on the main carriageway of a motorway.
- **6.** The arrows, symbols or panels shown on a sign for conveying a description of information in column 2 of an item in the sign table in Part 24 must be of the size, colour and type shown in the diagram in column 3.
 - 7. The sizes in the diagram are stroke widths.

PART 24
Arrows, symbols and panels that may be placed on a services sign

(1,	(2)	(3)	(4)	(5)
Ite	mDescription	Diagram	Part 22 diagram A item number	Variants and supplementary information
1	Directional arrow (Alternative types)	<u>16</u>	1, 2, 3	1. The direction in which the arrow shown by diagram A points may be varied;
		А В		2. The arrow must be white when placed on a blue or black background part of the sign
2	Symbol: Restaurant	12	1, 2, 3	The symbol must be white when placed on a blue or black background part of the sign
3	Symbol: Light refreshment facilities	7.25	1, 2, 3	The symbol must be white when placed on a blue or black background part of the sign
4	Symbol: Picnic area with a minimum of ten tables, each with seating for six persons	14	1, 2, 3	The symbol must be white when placed on a blue or black background part of the sign
5	Symbol: Overnight accommodation	14	1, 2, 3	 The symbol must be reversed when incorporated on a sign with a right pointing arrow; The symbol must be white when placed on a blue or black background part of the sign
6	Symbol: Tourist Information Centre or Point	14	1, 2, 3	The symbol must be white when placed on a blue or black background part of the sign; The background colour of the symbol must be the same as the background of the sign on which it is incorporated

(1,	(2)	(3)	(4)	(5)
Ite	mDescription	Diagram	Part 22 diagram A item number	Variants and supplementary information
7	Symbol: LPG fuel	LPG 14	1, 2, 3	1. The symbol must be white when placed on a blue or black background part of the sign;
				2. The background colour of the symbol must be the same as the background of the sign on which it is incorporated
8	Symbol: Fuel	10	1, 2, 3	1. The symbol must not be used in combination with the unleaded petrol symbol shown in item 9;
				2. The symbol must be white when placed on a blue or black background part of the sign
9	Symbol: Unleaded petrol	10	1	1. The word "Petrol" must always be used in combination with and placed to the left of the symbol;
				2. The price of unleaded petrol in pence must be shown to the right of the symbol, followed by the letter "p";
				3. The figures indicating the price of unleaded petrol may be displayed, in any appropriate style, as variable legends in white characters on the blue background of the sign or displayed as variable legends in white or yellow characters on a black background;
				4. The symbol must not be used in combination with the fuel symbol shown in item 8
10	Symbol: Facilities for recharging electric vehicles	14	1, 2	The black patch must be omitted when the symbol is placed on a blue background, in which case the size of the car and plug symbol must be increased proportionally to a height of 14 stroke widths

(1)	(2)	(3)	(4)	(5)
Ite	mDescription	Diagram	Part 22 diagram A item number	Variants and supplementary information
11	Symbol: Corporate identifier (more than one identifier may be shown on a sign)	14	1, 3	 The corporate identifier must be a logo of appropriate colours and design, contained within the white border of the square symbol; The background of the symbol within the border may be of any colour appropriate to the logo; The background colour on which the symbol is placed must be black on the sign provided for at item 3 of the sign table in Part 22
12	Symbol: Facilities provided only for vehicles other than heavy goods vehicles	16	2	The symbol must be reversed when incorporated on a sign with a right pointing arrow
13	Symbol: Facilities provided only for heavy goods vehicles (truckstop)		12	The symbol may be reversed; "Lorries only" may be added below the lorry symbol
14	Panel: Name of operator (at the top of the sign)	GOOD FOO	DD	To The name of the operator may be varied, may be in any style of lettering and may include a logo; 2. The legend, logo, background and border may be in any contrasting colours; 3. The border may be omitted
15	Panel: Name of operator	GOODE EGG	1, 3— 16.8 ma	1. The name of the operator may be varied, may be in any style of lettering and may include a logo;
	(at the top of the sign)			2. The legend, logo and background may be in any contrasting colours;

(1,	(2)	(3)	(4)	(5)
Ite	mDescription	Diagram	Part 22 diagram A item number	Variants and supplementary information
				3. A white border may be added to the inside edge of the panel, to ensure adequate contrast between the panel and the background of the sign
16	Panel: Services not open for 24 hours (within the sign)	not 24 hrs	2-3 = 4	The panel must have white letters on a black background with a white border when incorporated in diagram A at item 3 of the sign table in Part 22
17	Panel: Fuel only available 24 hours a day (at the bottom of the sign)	Fuel only 24	hrs =	The panel must have white letters on a black background with a white border when incorporated in diagram A at item 3 of the sign table in Part 22

Provisions applying to Part 26

- 1. A description of information in column 2 at an item of the sign table in Part 26 must be conveyed by a sign which is of the colour and type, and complies with the requirements as to size, shown in the diagram in column 3, or that diagram as varied in accordance with column 4.
- **2.**—(1) This paragraph applies to a legend on a sign provided for at item 6 or 7 of the sign table in Part 26 where the legend is the name of a place that is a city, town, or village.
- (2) On a sign placed in Scotland, the name of the place may be written in Scottish Gaelic, in addition to English, provided the Scottish Gaelic version is shown above the English.
- (3) Where the name is the same in English and Scottish Gaelic, it may be written only once on the sign in a manner which complies with the requirements of these Regulations applicable to a name written in—
 - (a) English; or
 - (b) Scottish Gaelic.

PART 26
Miscellaneous signs indicating services and local facilities

Sign table — Schedule 12, Part 26

(1)	(2)	(3)			(4)
Ite	mDescription	Diagram			Permitted variants
1	Diagram 2917.1 Availability of motorway service areas ahead, including services for lorries only (truckstop), with distances in miles and geographical names	250 min 400 max	M 4 M 5 (N) M 5 (S)	Westville Woodhouse	1. The geographical names of the service areas and the words "NO SERVICES" may be varied or omitted as appropriate; 2. The lorry symbol and "only" may be omitted on max 10 m 2. The numerals expressing distance may be varied with the only permitted distance that is less than a mile being "¾ m" with distances greater than 1 mile being expressed to the nearest mile; 4. Motorway numbers, with or without compass points, may be varied or omitted as appropriate; 5. The number of service areas indicated may be varied.
2	Diagram 2917			Services	1. The names of the service area operators and the words "NO
	Availability of motorway service areas	175 min 280 max	M 4	STEAKADE	SERVICES" may be varied or omitted as appropriate:
	ahead with distances in miles and names of		M 5 (N) M 5 (S)	FIFTY	2. The numerals expressing distance may be varied with the only permitted distance that is less than a mile being "2/3 m"
	operators				with distances greater than 1 mile being expressed to the nearest mile;
					3. Motorway numbers, with or without compass points, may be varied or omitted as appropriate
					4. The number of service areas indicated may be varied;

(1) (2)	(3)	(4)
ItemDescription	Diagram	Permitted variants
Distance to next motorway service area	Services — 250 min — 400 max	The numeral may be varied with the distance expressed in miles to the nearest mile
4 Diagram 2918.1 Sign placed on or near a motorway indicating that services are not available	No services on motorway = 250 min 400 max	
Sign placed on or near a primary or non-primary route indicating that services are not available on motorway ahead	No services on M 41 = 75 min 300 max	 The motorway number may be varied and include a compass point as appropriate; The motorway number may be varied to "motorway"
Junction ahead on a primary or non-primary route leading to a small town or village not on a main through route, which provides parking, public toilets, refreshments and fuel during normal shop opening hours at least	150 min _ Thorpe St Michael	1. The place name may be varied of omitted; 50 min 300 max 2. "local" must be varied to "Local" when the place name is omitted; 3. "local facilities" may be omitted; 4. A distance in accordance with Part 3 of Schedule 18 may be added except that the distance must not be expressed in yards; 5. The direction in which the arrow points may be varied and where the arrow points ahead and there is a single line of legend, the arrow shown by diagram B at item 1 of the table in Part 24 of this Schedule must be used;

(1)	(2)	(3)	(4)
Ite	mDescription (Alternative types)	Diagram	Permitted variants 6. Symbols other than the "WC", petrol pump and cup (denoting light refreshments) may be omitted as appropriate; the wheelchair symbol (denoting facilities for disabled people), when shown, must always be placed to the right of the "WC" symbol; the "i", spoon and fork, and bed symbols represent tourist information, restaurant and overnight accommodation respectively and symbols may be shown on a single line
7	Diagram 2309.1 Direction and distance in miles to a small town or village offering facilities indicated on the sign shown in item 5 of this table		1. The place name may be varied corromitted; 2. "local" must be varied to "Local" when the place name is omitted; 3. The direction in which the sign points may be reversed; 4. The distance may be varied to another in accordance with Part 3 of Schedule 18 except that the distance must not be expressed in yards

Provisions applying to Part 28


- 1. Information or a warning of a description in column 2 of an item in the sign table in Part 28 must be conveyed by a sign which is of the colour and type, and complies with the requirements as to size, shown in the diagram in column 3, or that diagram as varied in accordance with column 4.
 - 2. A sign provided for at item 17 must be internally lit.
- **3.**—(1) This paragraph applies to a legend that is used on a sign provided for at item 2, 3 (other than when placed on a motorway), 7, 8, 9 or 10 of the table in Part 28 where the legend is the name of a place that is a city, town, village or tourist destination.
- (2) On a sign placed in Scotland, the name of the place may be written in Scottish Gaelic, in addition to English, provided the Scottish Gaelic version is shown above the English.
- (3) Where the name is the same in English and Scottish Gaelic, it may be written only once on the sign in a manner which complies with the requirements of these Regulations applicable to a name written in— $\frac{68}{68}$

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

- (a) English; or
- (b) Scottish Gaelic.
- **4.** Paragraph 2 of the Schedule 12 General Directions, applies to the sign provided for at item 21 of the sign table in Part 28.
 - **5.**—(1) The signs mentioned in sub-paragraph (2) need not be illuminated.
 - (2) The signs are those provided for at items 7, 8, 9, 14, 19, 20 and 21 of the Part 28 sign table.
 - (3) Sub-paragraph (1) does not apply to a sign provided for at item 8 when placed on a motorway.

PART 28

Other directional signs

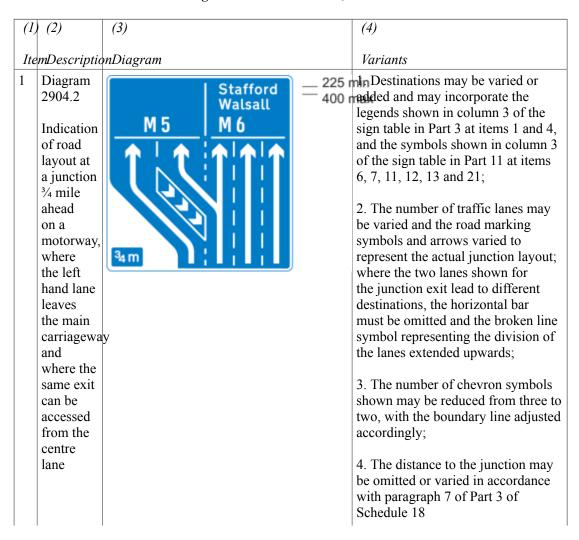

(1) (2)(3) (4) *ItemDescriptionDiagram* Variants Diagram 1. Destinations may be varied or The SOUTH 2017.1 150 added and may incorporate the Lampton London 300 legends shown in column 3 of the Indication sign table in Part 3 at items 1 and 4, of road the panels shown in column 3 of the layout at sign table in Part 9 at items 1 and 3, a junction and the symbols shown in Part 11 3/4 mile (other than items 1 to 5); ahead on a primary 2. The number of traffic lanes may route, be varied and the road marking 3₄ m where symbols and arrows varied to represent the actual junction layout. the left hand lane Where the two lanes shown for leaves the junction exit lead to different the main destinations, the horizontal bar carriageway must be omitted and the broken line symbol representing the division of and the lanes extended upwards; where the same exit can be 3. The number of chevron symbols accessed shown may be reduced from three to from the two, with the boundary line adjusted centre accordingly; lane 4. The distance to the junction may omitted or varied in accordance with paragraph 7 of Part 3 of Schedule 18 3 Diagram 1. Destinations may be varied or The SOUTH 2019.1 60 min added and may incorporate the London .ampton 300 makegends shown in column 3 of the Indication sign table in Part 3 at items 1, 2 and 4, the panels shown in Part 9 and of appropriate the symbols shown in column 3 of traffic the sign table in Parts 11 (other than lanes at a items 1 to 5) and 20; junction 2. The number of traffic lanes and or at a junction arrows, the widths of individual ahead lanes and the lengths of horizontal where bars, may be varied and may the right indicate an arrangement of shared hand lane lanes in a similar manner to column divides 3 of the sign table in Part 5 at item into two,

3. The route numbers must be white and the background blue when the

sign is placed on a motorway exit

the

additional

lane on

(1) ((2)	(3)		(4)
Iteml	Descrintio	nDiagram		Variants
th le to	he right eading o a lifferent	mDiagram		slip road or the main carriageway of a motorway where it terminates at a junction ahead;
sl cc aj tc	estination diagram hows olours pplicable o sign on primary oute)			4. The legend, traffic lane symbols, arrows and sign border must be black and the background white when the sign is placed on a non-primary route
2: 	Diagram 1912 unction head	M 25/M 26 Junction 2 miles	250 min 400 max	1. Route numbers may be varied in accordance with the entries in column 3 of the sign table in Part 3 at item 4;
or m w ar	nead on a notorway with nother			2. The junction number in white numerals on the blue background may be added after the word "Junction";
				3. Numerals indicating the distance in miles may be varied with the distance being expressed in miles to the nearest mile
20 ai	Diagrams 010.1 nd 010.2	300 min 1200 max	300 yards	Numerals in the upper panel of diagram 2010.1 indicating the distance to the prohibited turn may be varied;
m al a ro	Prohibited novement head on primary oute with an		Northtown	2. The route symbols and representation of the road layout may be varied, except that the width of the route symbols must not be varied;300 max
o:	ndication of a route voiding hat		2010.1	3. The "no right turn" symbol may be reversed to indicate a prohibited left turn or, in diagram 2010.1, varied to the "no U-turn" symbol
1 1	nat rohibition	75 min 300 max =	Bell Green B 2110	shown in column 3 of the sign table in Part 20 at item 20; 1200 max 4. Destinations may be varied or added and may incorporate the legends shown in column 3 of the
			2010.2	sign table in Part 3 of this Schedule at items 1 and 4, the panels shown

(1,	(2)	(3)	(4)
Ite	mDescriptio	nDiagram	in Part 9 and the symbols shown in Part 11 (other than items 1 to 5); 5. The names of destinations and route numbers may be placed directly on the green background, with the white background omitted, provided destinations are in white lettering and the route numbers are
6	Diagrams 2123 and 2124 Prohibited movement ahead on a non-primary route with an indication of a route avoiding that prohibition	300 min 1200 max Fulham High Street 2123 75 min 300 max West End 2124	in yellow. 1. Numerals in the upper panel of diagram 2123 indicating the distance to the prohibited turn may be varied; 2. The route symbols and representation of the road layout may be varied as appropriate, except that the width of the route symbols must not be varied; 3. The "no right turn" symbol may be reversed to indicate a prohibited left turn or, in diagram 2123, varied to the "no U-turn" symbol shown in column 3 of the sign table in Part 20 at item 20; 4. Destinations may be varied or added and may incorporate the legends shown in column 3 of the sign table in Part 3 at items 1 and 4, the panels shown in Part 11 (other than items 1 to 5)
7	Diagram 2141 Direction for traffic on a minor route to a destination reached along another	NEWTON LONGVILLE $=^{40}_{60}$	1. Place names may be varied or added in accordance with column 3 of the sign table in Part 3 at item 1 in and may be shown in lower case letters with initial capitals; 2. A distance may be added;

$\left[\left(l\right) \right]$	(2) (3)	(4)
Ite	mDescriptionDiagram minor route	Variants 5. The sign may point to the left
	(Alternative types)	
8	Diagram 2215 Junction ahead leading to a place or geographication area containing several tourist destinations or leisure facilities (Alternative types)	1. The place name and the name of the courist destination or leisure facility may be varied in accordance with Scients 3 of the sign table in Part raditures 1 and 3; Archer 60 min 2. The number of touristnax destinations or leisure facilities shown on the lower part of the sign may be varied, but must not exceed five and, in the case of a sign placed on a motorway, must not exceed three; 3. The symbols may be varied to those shown in Parts 14 to 18; 4. A distance in relation to each destination shown on the sign may be added; 5. The direction in which the arrow
9	Diagram 2205	points may be varied 1. The name of a place or geographical area may be added in
	Sign on a primary or non-primary route indicating location of a Tourist Information Centre or Point Sign on a primary or non-primary or non-primary route information centre 300 yds — 40 min 150 max — 50 min 187.5 max	the same size of letters as "Tourist information centre"; 2. "centre" may be omitted; 3. The distance may be varied in accordance with Part 3 of Schedule 18; 4. The arrow may be reversed to point horizontally to the right; 5. The distance, the arrow or both may be omitted

(1) (2)	(3)	(4)
ItemDescript	ionDiagram	Variants
10 Diagram 2307	Scottsville WC	1. The name of the place may be varied (including to a geographic area) or omitted;
Sign on a primary or non-primary route	400 yards = 60 min 250 max	2. The recycling symbol shown in column 3 of the sign table in Part at item 14 may be added;
indicating distance ahead to a parking place with public toilets that has facilities		3. Any of the symbols may be omitted but there must be at least two symbols on the sign includin the "P" and either the "i", picnic area or viewpoint symbol. The wheelchair symbol, when used, must be placed to the right of the "WC" symbol; it must not be included without the "WC" symbol.
for disabled persons,		4. The distance may be varied in accordance with Part 3 of Schedule 18;
Tourist Information Centre or Point,	on	5. An arrow pointing horizontally the left or to the right may be add
public telephone picnic area and		6. The wheelchair and viewpoint symbols must be reversed when a arrow pointing to the right is add
viewpoint		7. The distance may be omitted when an arrow is added
11 Diagram 2301.1	Rose Bay	1. The name of the caravan site n be varied or omitted;
Sign on a primary or non-primary	200 yds = 50 min 250 max	2. The distance may be varied in accordance with Part 3 of Schedule 18;
route indicating distance		3. The arrow may be reversed to point horizontally to the right;
and direction to a		4. The distance or the arrow, but both, may be omitted
caravan site which has at least 20		
pitches		


(1) (2)	(3)	(4)
ItemDescription	nDiagram	Variants
(where the site is both a caravan and a camping site, the reference to the number of pitches includes both pitches for caravans and for tents)		
Sign on a primary or non-primary route indicating distance and direction to a camping site which has at least 20 pitches (where the site is both a caravan and a camping site, the reference to the number of pitches includes	Long Hill 100 yds 250 max	 The name of the camping site may be varied or omitted; The distance may be varied in accordance with Part 3 of Schedule 18; The arrow may be reversed to point horizontally to the right; The distance or the arrow, but not both, may be omitted

(1) (2)	(3)		(4)
ItemDes	scriptionDi	agram	Variants
both pitch for carar and tents	nes vans for		
prim or no prim route	on a hary on-hary e cating ince	outh lostel 00 yds = 50 min 250 max	 "Youth Hostel" may be varied to "Tourist hostel" in which case the symbol must be omitted; The distance may be varied in accordance with Part 3 of Schedule 18; The arrow may be reversed to point horizontally to the right; The distance or the arrow, but not both, may be omitted
prim or no prim route	on a hary on-hary e cating ince	arlton Glen 50 min 250 max	 The name of the picnic area may be varied or omitted; The distance may be varied in accordance with Part 3 of Schedule 18; The arrow may be reversed to point horizontally to the right; The distance or the arrow, but not both, may be omitted
mou sign indic a	nanently nted B rsion e be A	— 120 min — 500 max — 125 min — 625 max	 The symbol may be varied to one shown in column 3 of the table in Part 11 at item 13; more than one symbol may be shown; Where a symbol is placed above another, the size and proportions of the chevron in diagram B must be varied as appropriate; The direction in which the arrow points in diagram A may be varied; when pointing to the left the arrow

(1)	(2)	(3)	(4)
Iten	nDescriptio	nDiagram	wariants must be placed to the left of the symbol;
			4. When the arrow in diagram A is pointing ahead it may be placed either to the left or to the right of the symbol and diagram B, shown in column 3 of the sign table in Part 5 at item 1, must be used where there is one symbol or a single row of symbols;
			5. The arrow in diagram A may be varied to the arrow shown in column 3 of the sign table in Part 5 at item 2;
			6. The sign shown by diagram B may be reversed to point left
	Diagrams 2709 and 2710	Ash Tunnel Emergency Vehicles 75 min 300 max	1. The name of the incident point may be varied or omitted; Ash Tunnel 2. The direction in which the arrow
1 5 1	Permanent mounted sign indicating a route for	2709	points in diagram 2709 may be varied; 2710 3. The arrow in diagram 2709 may be omitted and
1	emergency vehicles to a named emergency		the U-turn arrow, in white, shown in column 3 of the sign table in Part 5 at item 2, placed to the right of the legend;
	services incident point		4. The sign shown by diagram 2710 may be reversed to point right
	Diagram 2711.1	3	1. The symbols and arrows may be reversed to indicate an exit to the left;
1	Direction and distance to emergency exit for	1 00 yards = 40 min 80 max 10	-> 10 imidi
1 1	pedestrians from a tunnel	77	3. The distance may be varied or omitted;

(1)	(2)	(3)	(4)
Ite	mDescriptio		Variants
	(Alternativ types)	e	4. Where emergency exits are more than 880
	31 /		yards apart, distances must be expressed in miles, denoted by "miles" or "mile" as appropriate, and must be to the nearest ¼ mile with the fractions ¾, ½ and ¼ being used
18	Diagram 2922	Works unit only = 250 min 400 max	
	Exit from a motorway for works traffic only		
19	Diagram 2801 and 2802		1. The word "Goods" may be romitted or varied as appropriate to rindicate the type or types of vehicle
	Sign on a primary or non-primary	2801 AA Goods Vehicle	tested; 2. The testing station symbol may be omitted;
	route	Testing Station = 50 1	3.A distance may be added;
	a route or direction to a testing station for goods	2802	4. The direction in which the arrow points in diagram 2801 may be varied; when pointing to the right it must be placed on the right hand side of the sign with the symbol, if shown, placed to the left of the legend;
	vehicles		5. When the arrow in diagram 2801 is pointing ahead it may be placed either on the left hand or right hand side of the sign, with the symbol, if shown, placed at the opposite end of the sign;
			6. The arrow in diagram 2801 may be omitted and the U-turn arrow shown in column 3 of the sign table in Part 5 at item 2, placed on the right hand side of the sign, with the

(1) (2)	(3)	(4)
<u>Ite</u> mDescripti	onDiagram	 Variants symbol, if shown, placed to the left of the legend; 7. The sign shown by diagram 2802 may point to the left, with the symbol, if shown, placed to the right of the legend
Diagram 2601.2 Indication of a route for cyclists through a road junction ahead (Alternative types)		1. Destinations may be omitted, varied or added and may incorporate the legends shown in column 3 of the sign table in Part 3 at item 1; 2. A distance may be added; 3. The symbols indicating the road layout and the route for cyclists may be varied as appropriate except the individual symbol widths
Diagram 2610.2 Direction along a public right of way, concession path or permissive path indicated by waymarks		1. The direction in which the arrow points may be varied, the shaft may be extended and curved; 2. The colour of the arrow may be varied to indicate the type of route, with the background in any colour; 3. "Public Footpath", "Footpath", "Bridleway", "Byway", "Restricted Byway", "Concessionary Path", "Permissive Path" (or other appropriate description for conveying the direction of a public right of way, concessionary path or permissive path) may be added on, or adjacent to, the arrow; 4. The name of a destination, a route and an identifying symbol of a route, in any combination, may be added on or adjacent to the arrow; 5. A distance may be added; 6. A legend may be in any style, size and contrasting colour

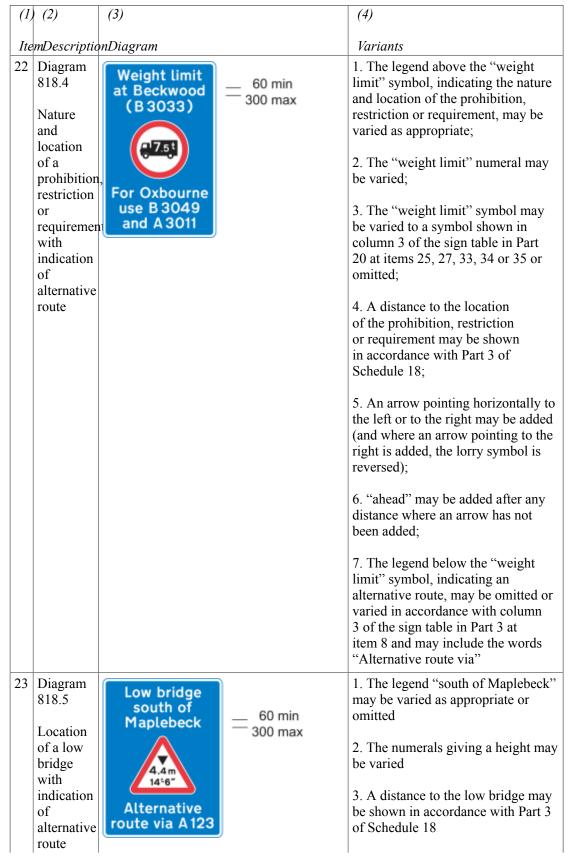

(1) (2	(2)	(3)	(4)
ItemD	Descriptio	nDiagram	Variants
			4. An arrow pointing horizontally to the left or to the right may be added
			5. "ahead" may be added after any distance where an arrow has not been added
			6. The legend below the "height limit" symbol, indicating an alternative route, may be omitted or varied and may include the legends shown in column 3 of the sign table in Part 3 at item 8
25	iagram 502	Pwc >	1. The lorry, "WC" and telephone symbol may be omitted as appropriate
pri or pri	Sign on a primary or non-primary route indicating distance to a goods vehicles parking place ahead with public toilets and telephones	1 mile = 60 min 250 max	2. The recycling symbol shown in column 3 of the table in Part 11 at item 14 may be added
ind dis to go ve pa			3. The "i" symbol shown in column 3 of the sign table in Part 11 at item 33 may be added where the parking place includes a general information point not associated with tourist destinations
ah wi pu			4. The distance may be varied in accordance with Part 3 of Schedule 18
an			5. An arrow pointing horizontally to the left or to the right may be added
			6. An arrow pointing horizontally to the right may be added provided that the lorry symbol, if shown, is reversed
			7. The distance may be omitted when an arrow is added

The Schedule 12 General Directions

1. Paragraph 2 applies to a sign provided for—

- (a) in this Schedule which has a diagram B background as shown at an item in the sign table in Part 2 or 22.;
- (b) at item 7 in Part 26; or
- (c) at item 7, 15 (type B), 16 (diagram 2710) or 19 (diagram 2802) of Part 28.
- **2.** The sign may only be placed at a junction.
- 3. Paragraph 4 applies to a sign—
 - (a) which has a background provided for at item 9 of the Part 2 sign table (routes for pedestrians); or
 - (b) provided for at item 21 of the sign table in Part 28 (direction along a public right of way etc.).
- **4.** The back of the sign may be of any colour.